

What's New in LLVM

Session 411

Devin Coughlin, Program Analysis Engineer
Duncan Exon Smith, Clang Frontend Manager

Agenda

API Availability Checking for Objective-C

Static Analyzer Checks

New Warnings

C++ Refactoring

Features from C++17

Link-Time Optimization

API Availability Checking

Important to Adopt New APIs


Every OS release comes with great new APIs

Customers expect you to adopt

Still have to support users on older OSes


Base SDK and Deployment Target

Example: Supporting Multiple iOS Releases

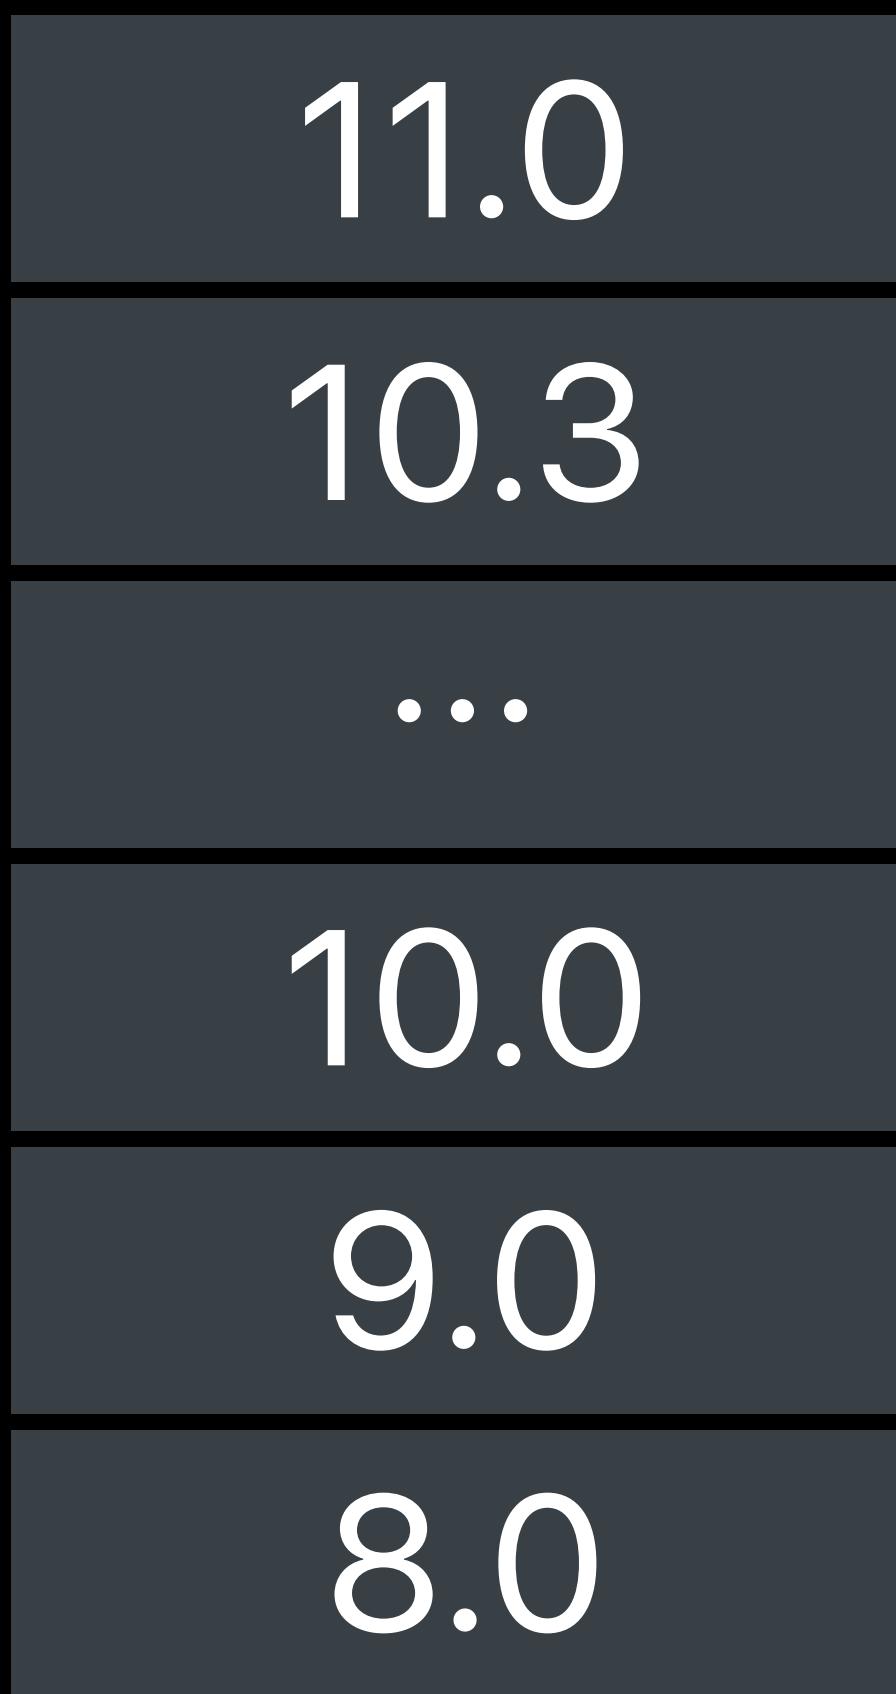


Base SDK and Deployment Target

Example: Supporting Multiple iOS Releases

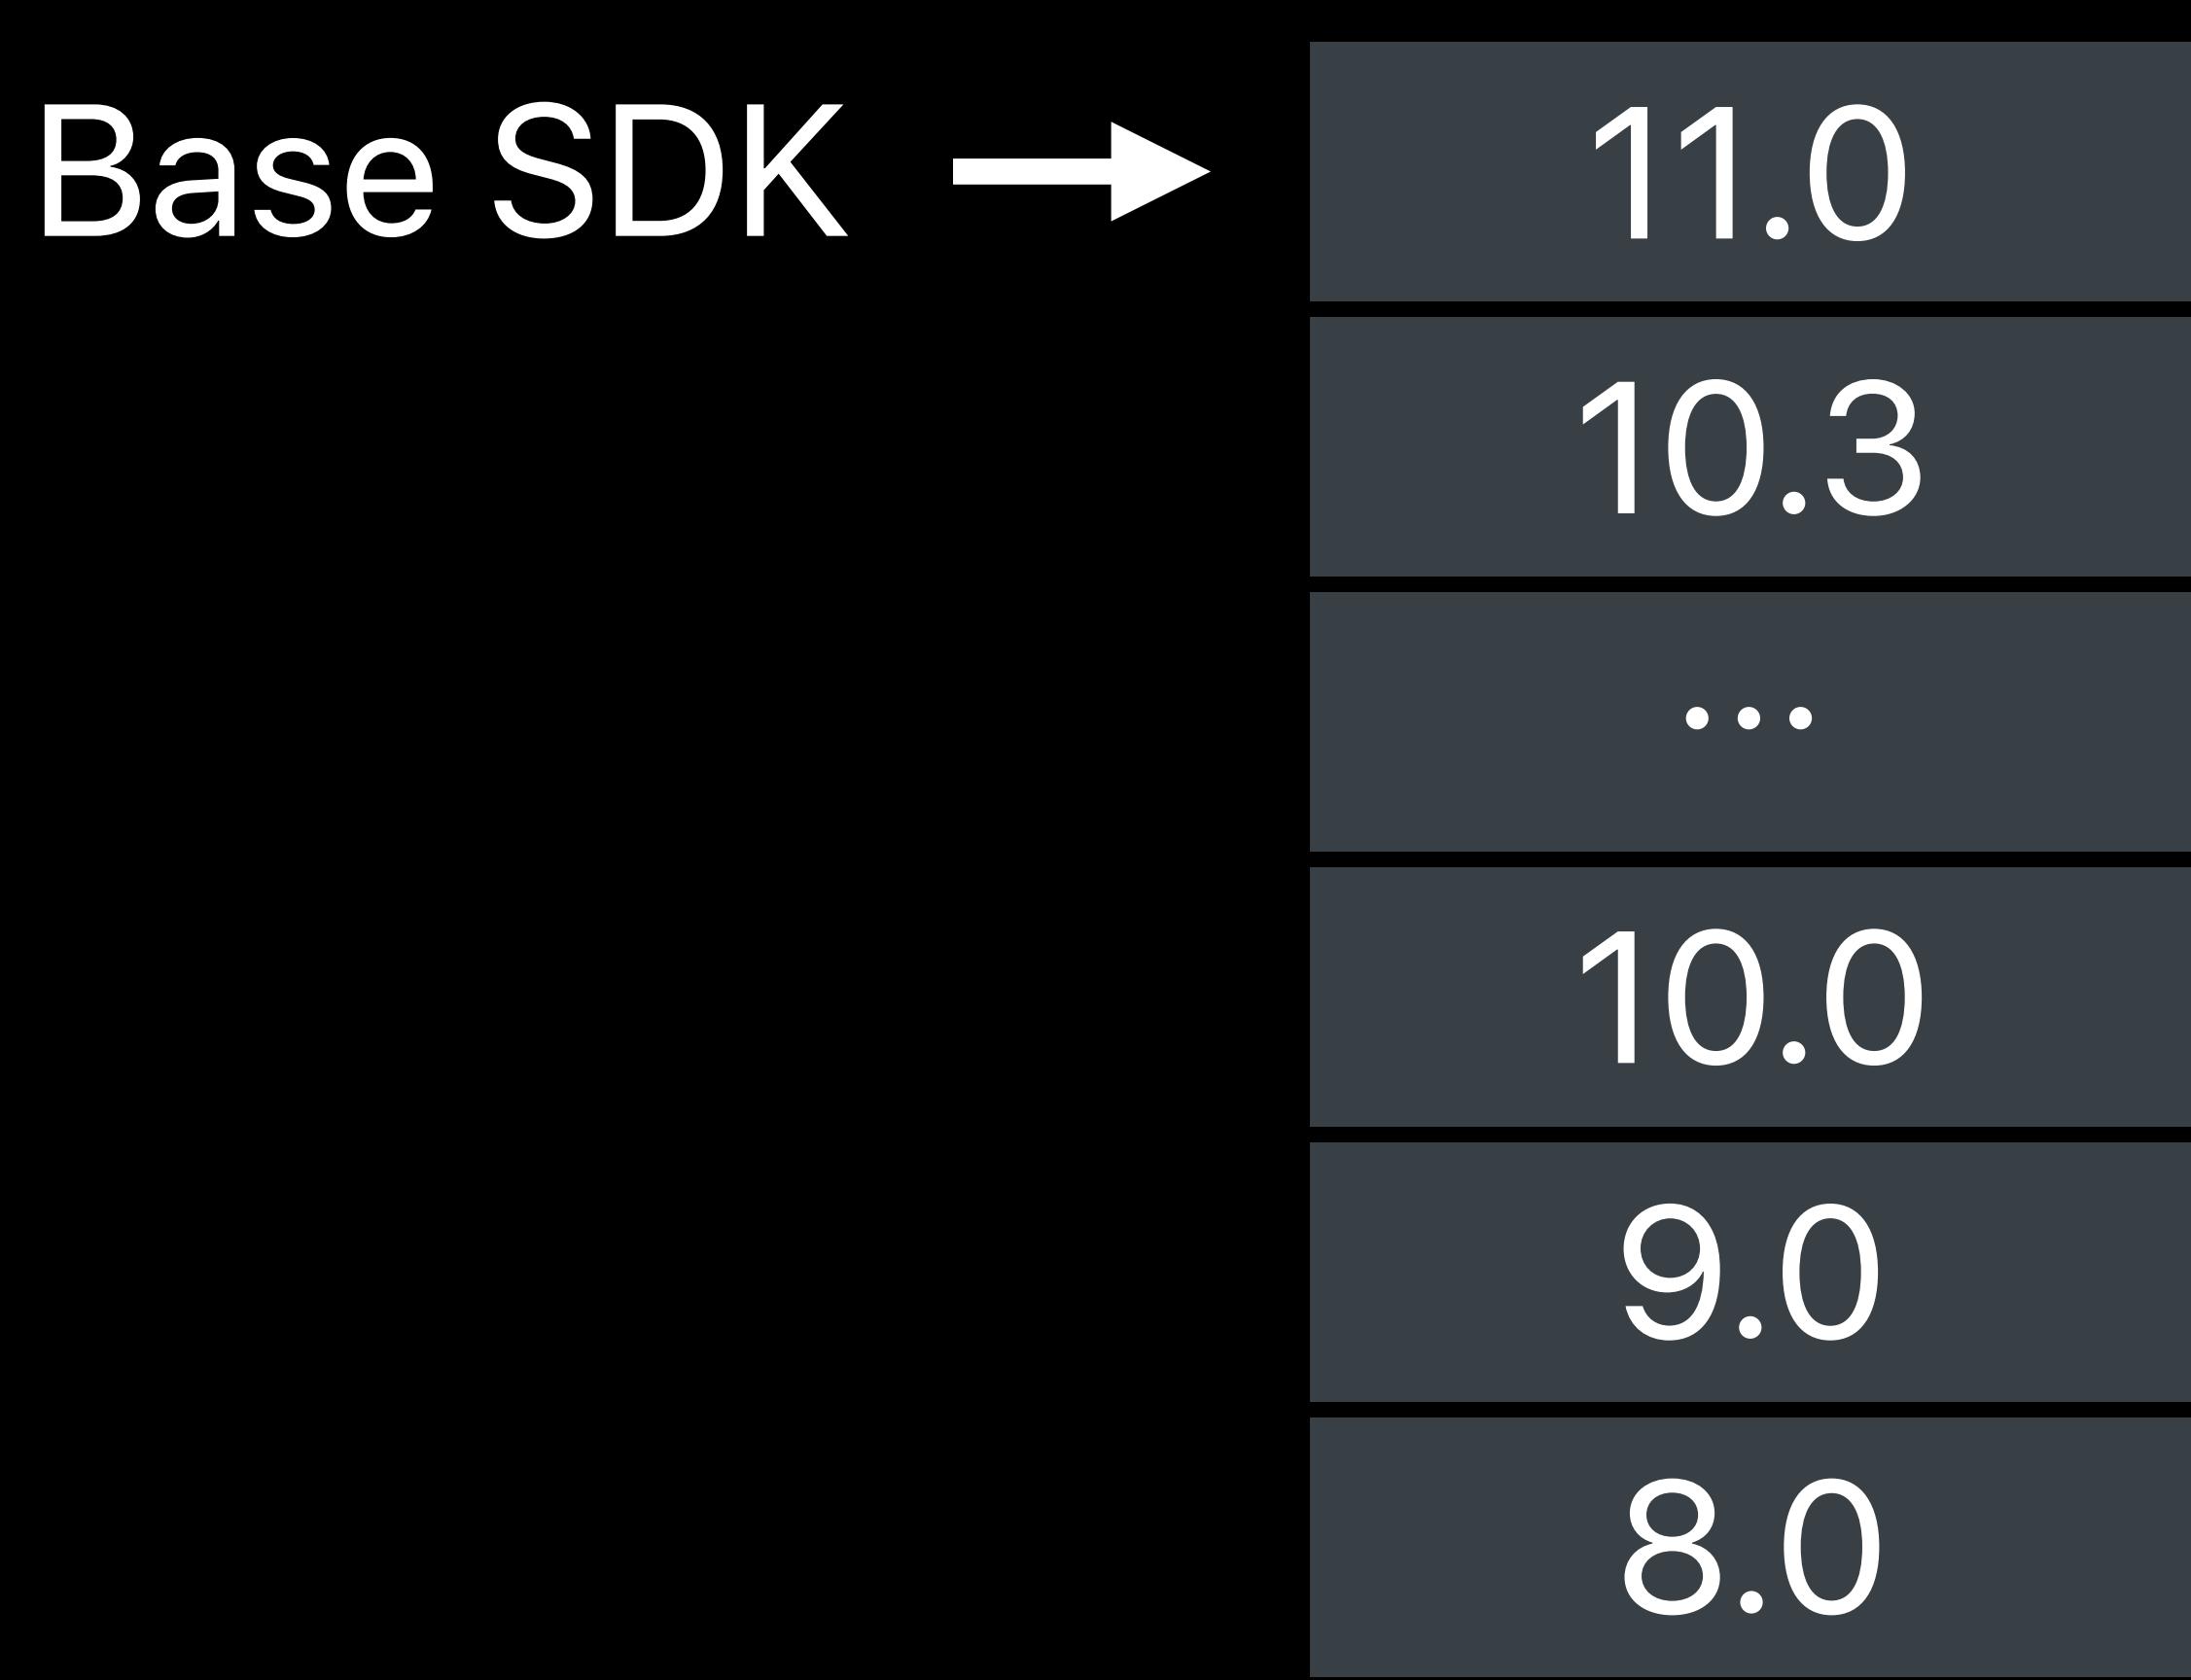


Base SDK and Deployment Target

Example: Supporting Multiple iOS Releases

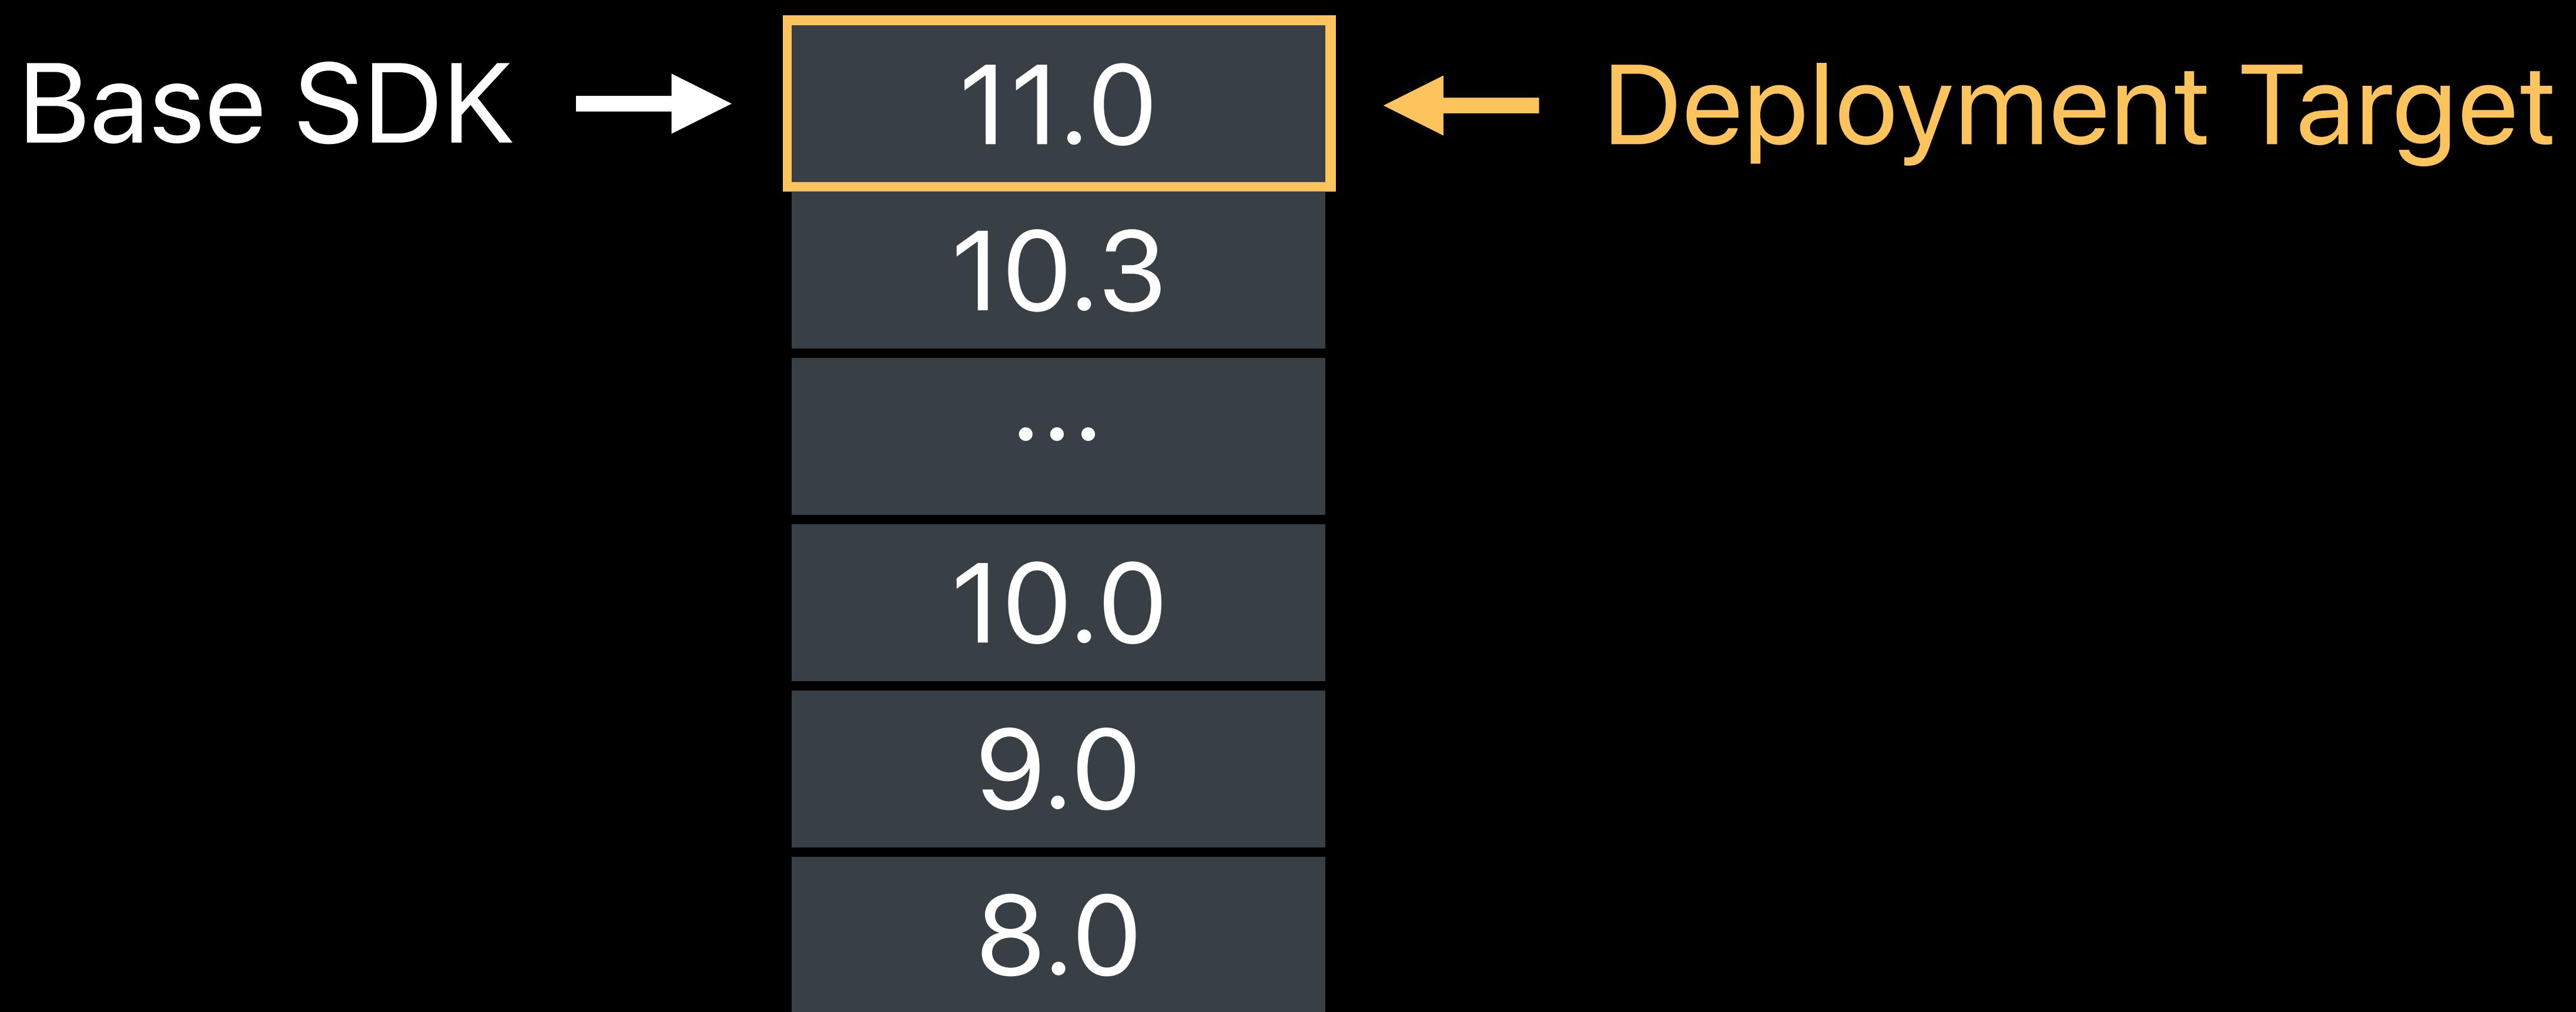

Base SDK and Deployment Target

Example: Supporting Multiple iOS Releases

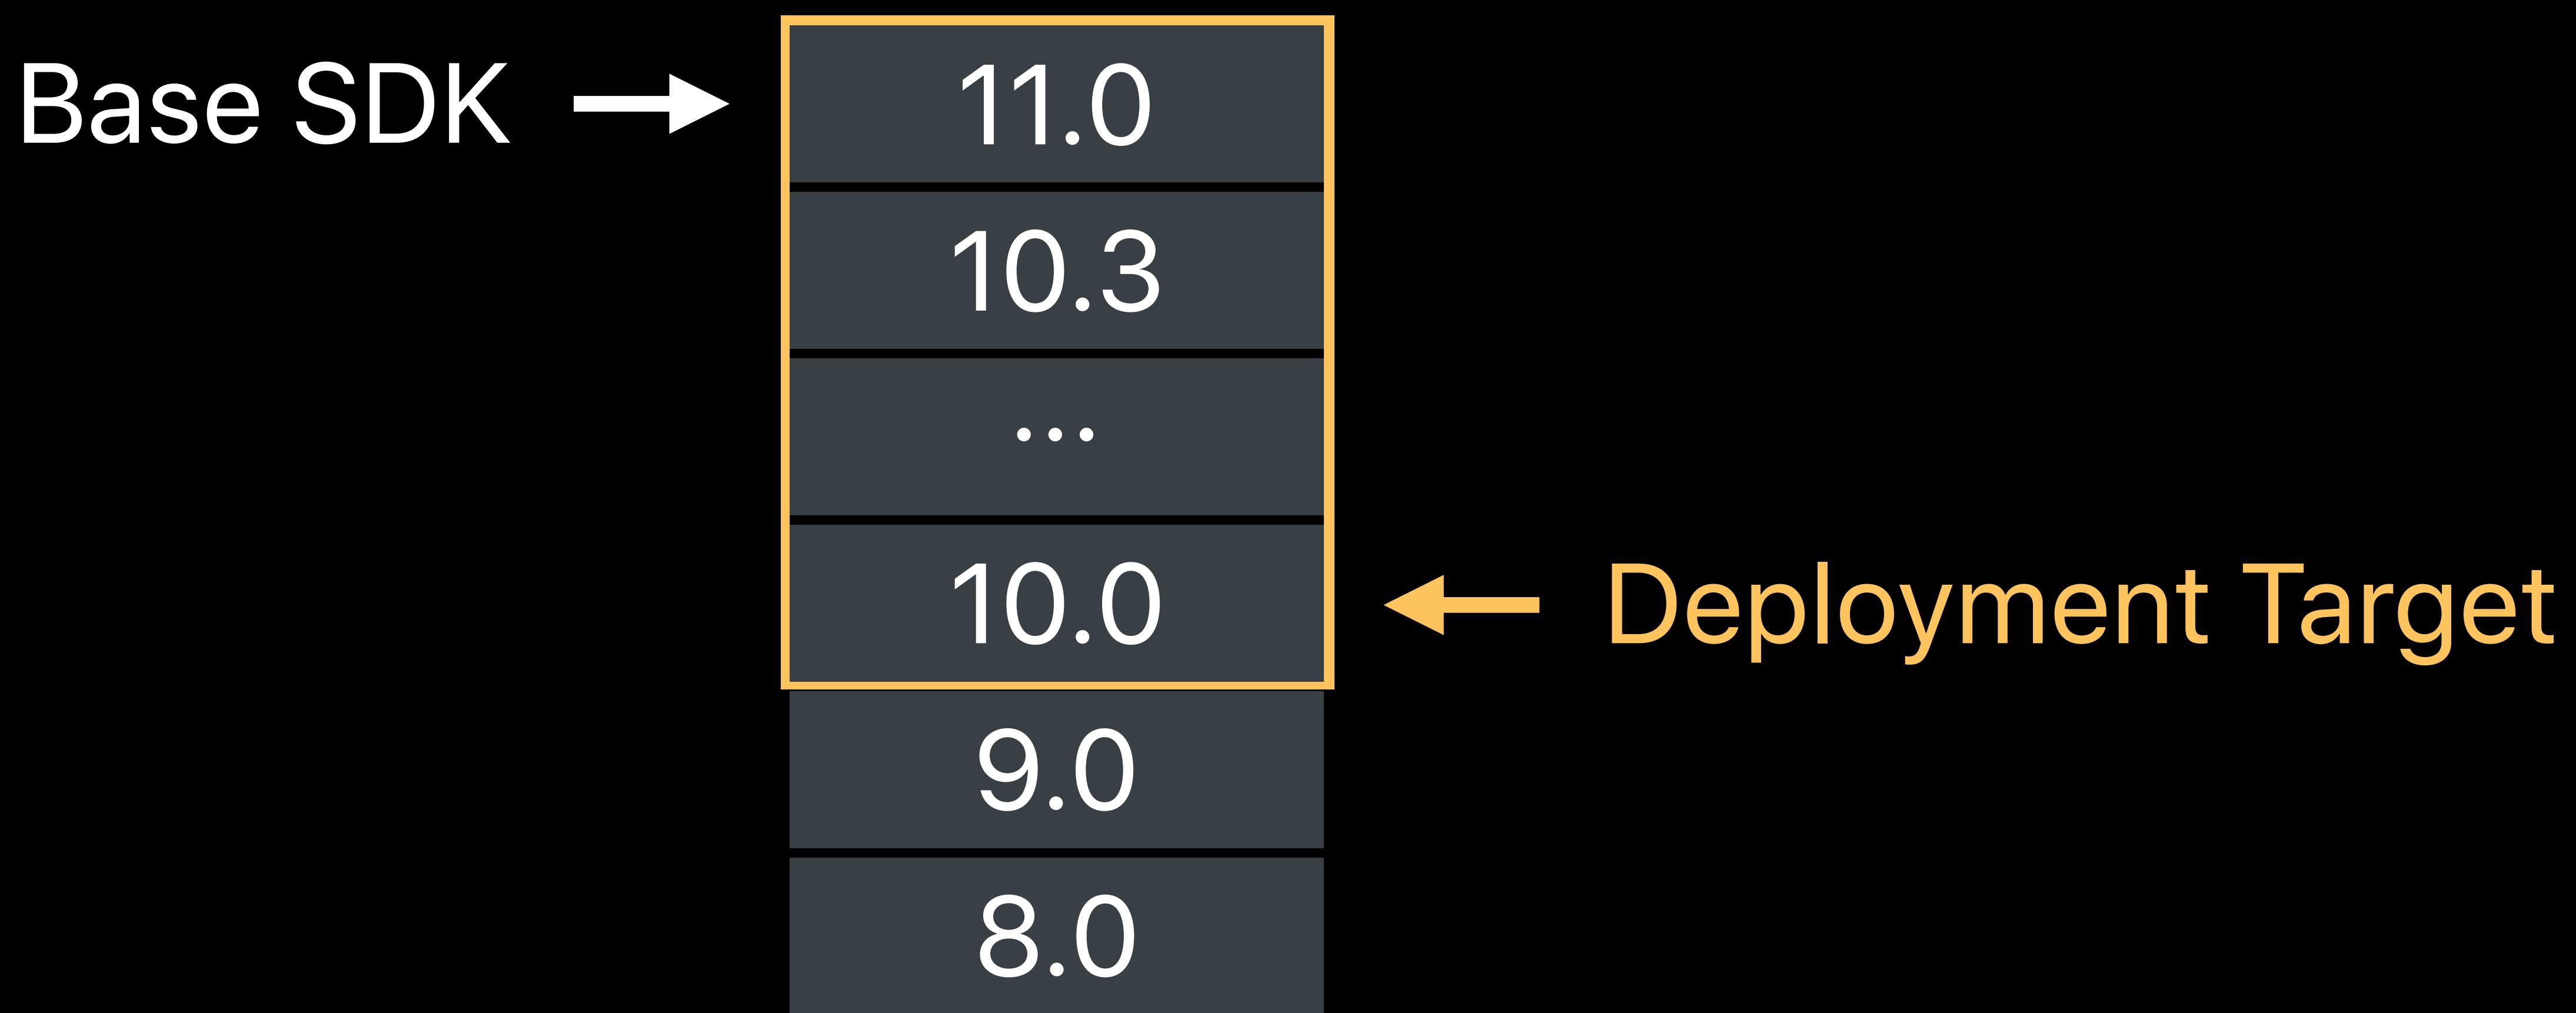

Only Call APIs When Available at Run Time

Crash when new API called on older OS

Query runtime for availability?

- Easy to get wrong
- Hard to test
- Different syntax for different kinds of APIs

```
&ARErrorDomain != NULL
```

```
&ARErrorDomain != NULL
```

```
futimens != NULL
```

```
[UIDragInteraction class]
```

```
[UIView instancesRespondToSelector:@selector(addInteraction:)]
```

```
[NSOrthography respondsToSelector:@selector(defaultOrthographyForLanguage:)]
```

Availability Checking in Swift

Unified query syntax `#available`

Availability Checking in Swift

Unified query syntax `#available`

Compiler catches missing availability checks

Availability Checking in Swift

Unified query syntax `#available`

Compiler catches missing availability checks

Availability Checking for Objective-C!

API Availability Checking in Objective-C

```
r = [VNDetectFaceRectanglesRequest new];
if ([handler performRequests:@[r] error:&error]) {
    // Draw rectangles
}
```

API Availability Checking in Objective-C

Compiler warns about unguarded uses of new API

```
r = [VNDetectFaceRectanglesRequest new];  'VNDetectFaceRectangleRequest is only available on iOS 11.0 or newer
if ([handler performRequests:@[r] error:&error]) {
    // Draw rectangles
}
```

API Availability Checking in Objective-C

Compiler warns about unguarded uses of new API

Use `@available` to query API availability at run time

```
r = [VNDetectFaceRectanglesRequest new];  'VNDetectFaceRectangleRequest is only available on iOS 11.0 or newer
if ([handler performRequests:@[r] error:&error]) {
    // Draw rectangles
}
```

API Availability Checking in Objective-C

Compiler warns about unguarded uses of new API

Use `@available` to query API availability at run time

```
r = [VNDetectFaceRectanglesRequest new];
if ([handler performRequests:@[r] error:&error]) {
    // Draw rectangles
}
```

API Availability Checking in Objective-C

Compiler warns about unguarded uses of new API

Use `@available` to query API availability at run time

```
if (@available(iOS 11, *)) {
    r = [VNDetectFaceRectanglesRequest new];
    if ([handler performRequests:@[r] error:&error]) {
        // Draw rectangles
    }
} else {
    // Fall back when API not available
}
```

API Availability Checking in Objective-C

Compiler warns about unguarded uses of new API

Use `@available` to query API availability at run time

```
if (@available(iOS 11, *)) {
    r = [VNDetectFaceRectanglesRequest new];
    if ([handler performRequests:@[r] error:&error]) {
        // Draw rectangles
    }
} else {
    // Fall back when API not available
}
```

API Availability Checking in Objective-C

```
if (@available(iOS 11, *))
```

API Availability Checking in Objective-C

```
if (@available(iOS 11, *))
```

On iOS returns true when iOS 11 APIs are available

API Availability Checking in Objective-C

```
if (@available(iOS 11, *))
```

On iOS returns true when iOS 11 APIs are available

On all other platforms always returns true

Factor out Code with API_AVAILABILITY()

Convenient to write entire methods with limited availability

```
@interface MyAlbumController : UIViewController
```

```
- (void)showFaces API_AVAILABILITY(ios(11.0));
```

```
@end
```

Factor out Code with API_AVAILABILITY()

Convenient to write entire methods with limited availability

Can apply to entire classes

```
API_AVAILABILITY(ios(11.0))
@interface MyAlbumController : UIViewController
- (void)showFaces;
@end
```

API Availability Checking in C/C++

Use `__builtin_available` to check availability at runtime

```
if (__builtin_available(iOS 11, macOS 10.13, *)) {  
    CFNewAPIOniOS11();  
}
```

API Availability Checking in C/C++

Use `__builtin_available` to check availability at runtime

Include `<os/availability.h>` for the `API_AVAILABILITY` macro

```
#include <os/availability.h>

void myFunctionForiOS11OrNewer(int i) API_AVAILABILITY(ios(11.0), macos(10.13));
```

API Availability Checking in C/C++

Use `__builtin_available` to check availability at runtime

Include `<os/availability.h>` for the `API_AVAILABILITY` macro

```
#include <os/availability.h>

class API_AVAILABILITY(ios(11.0), macos(10.13)) MyClassForiOS11OrNewer;
```

Existing Projects: Warn for New API Only

Warn starting with iOS 11, tvOS 11, macOS 10.13, and watchOS 4

APIs introduced in older SDKs not checked at compile time

Existing code does not need to be rewritten

Use `@available` and `API_AVAILABILITY` when adopting new APIs

New Projects: Warn for All Deployment Targets

All APIs are checked at compile time


Use `@available` and `API_AVAILABILITY` for APIs introduced after deployment target

New Projects: Warn for All Deployment Targets

All APIs are checked at compile time

Use `@available` and `API_AVAILABILITY` for APIs introduced after deployment target

Existing projects can opt-in

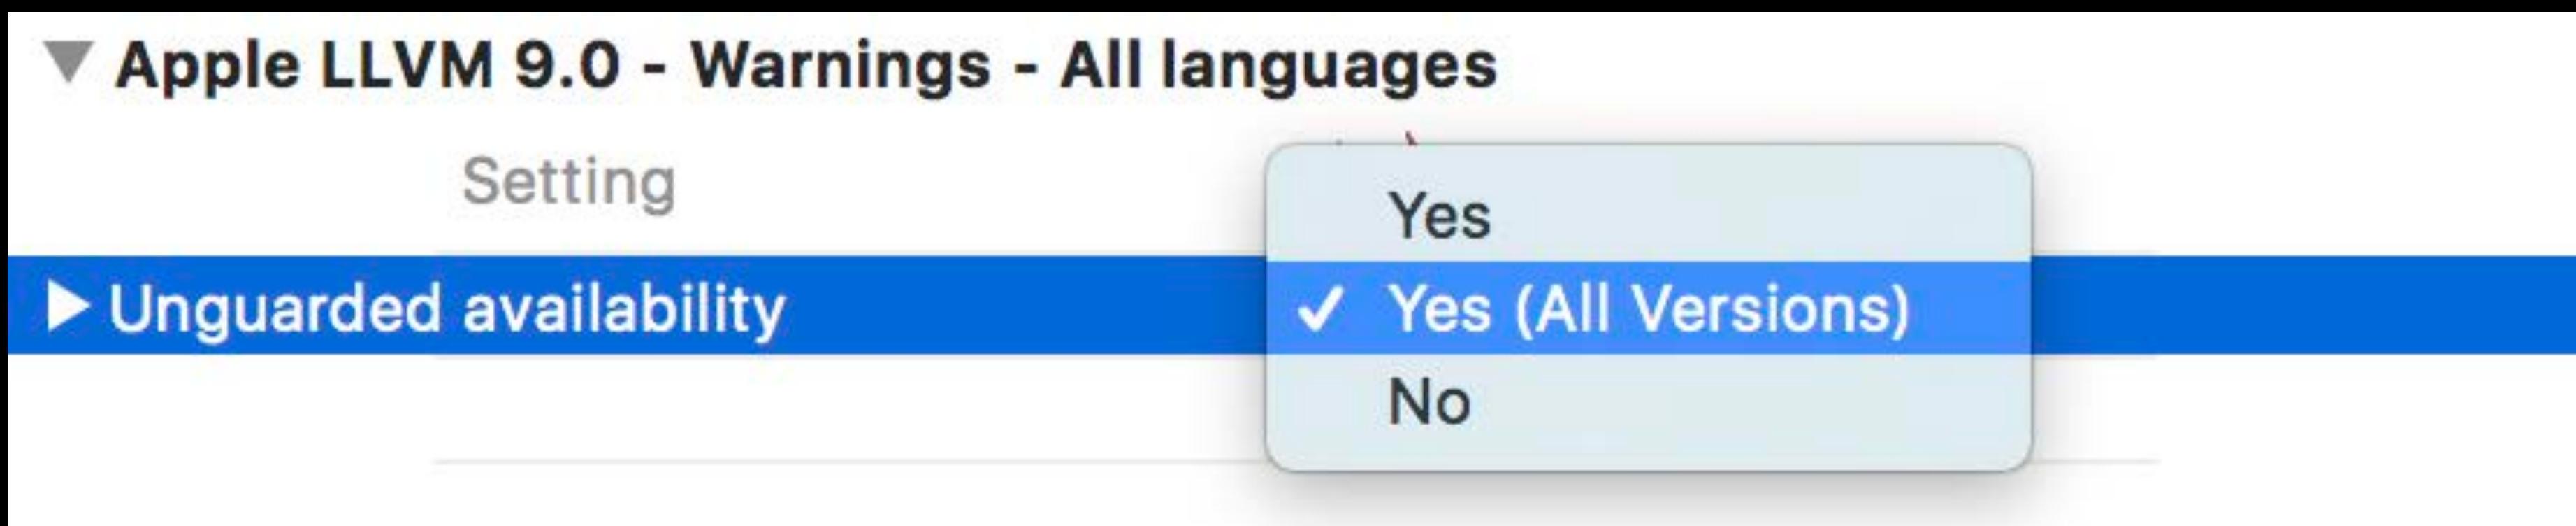

AVAILABLE NOW

Static Analyzer Checks

Finds Deep Bugs

Great at catching hard-to-reproduce, edge-case bugs

The screenshot shows the Xcode interface with a static analysis result for the project "MyApp". The status bar at the top indicates "Analyze Succeeded" at 8:18 PM. The left sidebar lists a single issue under "API Misuse (Apple)": "Argument to 'NSMutableArray' method 'addObject:' cannot be nil" in ViewController.m. The main editor window displays the ViewController.m code with several annotations from the static analyzer:

```
#import "ViewController.h"

@interface ViewController () {
    NSMutableArray<NSView *> *_allViews;
}

@implementation ViewController

- (void)viewDidLoad {
    [super viewDidLoad];

    NSView *childView = self.childViewControllers.firstObject.view;
    if (childView != nil)
        return;

    [self addView:childView];
}

- (void)addView:(NSView *)view {
    [_allViews addObject:view];
}
```

Annotations include:

- Line 1: "6. Argument to 'NSMutableArray' method 'addObject:' cannot be nil"
- Line 10: "2. Assuming 'childView' is equal to nil"
- Line 11: "3. Passing nil object reference via 1st parameter 'view'" (highlighted in blue)
- Line 12: "5. Entered call from 'viewDidLoad'"
- Line 13: "6. Argument to 'NSMutableArray' method 'addObject:' cannot be nil" (highlighted in blue)
- Line 14: "7. Argument to 'NSMutableArray' method 'addObject:' cannot be nil" (highlighted in blue)

Three New Checks

NEW

Suspicious comparisons of `NSNumber` and `CFNumberRef`

Use of `dispatch_once()` on instance variables

Auto-synthesized `copy` properties of `NSMutable` types

Do Not Compare Number Objects to Scalars

Comparing `NSNumber` pointer value to `0` checks for `nil` – not zero number

```
@property NSNumber *photoCount;  
  
- (BOOL)hasPhotos {  
    return self.photoCount > 0;  
}
```

Do Not Compare Number Objects to Scalars

Comparing `NSNumber` pointer value to `0` checks for `nil` – not zero number

```
@property NSNumber *photoCount;  
  
- (BOOL)hasPhotos {  
    return self.photoCount > 0;  
}
```



Comparing pointer value to a scalar integer value

Do Not Compare Number Objects to Scalars

Comparing `NSNumber` pointer value to `0` checks for `nil` – not zero number

```
@property NSNumber *photoCount;  
  
- (BOOL)hasPhotos {  
    return self.photoCount.integerValue > 0;  
}
```



Instead, compare integer value to integer value

Do Not Implicitly Convert Number Objects to Booleans

Implicit conversion to Boolean value checks for `nil` – not zero number

```
@property NSNumber *faceCount;  
  
- (void)identifyFaces {  
    if (self.faceCount)  
        return;  
    // Expensive Processing  
}
```

Do Not Implicitly Convert Number Objects to Booleans

Implicit conversion to Boolean value checks for `nil` – not zero number

```
@property NSNumber *faceCount;  
  
- (void)identifyFaces {  
    if (self.faceCount)  
        return;  
    // Expensive Processing  
}
```



Converting pointer value to a primitive boolean value

Do Not Implicitly Convert Number Objects to Booleans

Implicit conversion to Boolean value checks for `nil` – not zero number

```
@property NSNumber *faceCount;  
  
- (void)identifyFaces {  
    if (self.faceCount != nil)  
        return;  
    // Expensive Processing  
}
```



Instead, compare to `nil` explicitly

Control Check in Build Settings

Check for ambiguity by selecting 'Yes (Aggressive)':

The screenshot shows the 'Static Analyzer - Issues - Apple APIs' section in Xcode's build settings. It lists several issues with their current settings:

Setting	Value
Improper Handling of CFError and NSError	Yes ▾
Missing Localizability	No ▾
Missing Localization Context Comment	No ▾
Misuse of Collections API	Yes ▾
Misuse of Grand Central Dispatch	Yes ▾

A dropdown menu is open for the 'Suspicious Conversions of NSNumber and CFNumberRef' setting, showing three options:

- Yes (Aggressive)
- Yes
- No

Do Use `dispatch_once()` to Initialize Global State

```
+ (NSArray<NSImage *>)sharedPhotos {  
    static NSArray<NSImage *> *sharedPhotos;  
    static dispatch_once_t oncePredicate;  
    dispatch_once(&oncePredicate, ^{  
        sharedPhotos = [self loadPhotos];  
    });  
    return sharedPhotos;  
}
```



Do Use `dispatch_once()` to Initialize Global State

```
+ (NSArray<NSImage *>)sharedPhotos {  
    static NSArray<NSImage *> *sharedPhotos;  
    static dispatch_once_t oncePredicate;  
    dispatch_once(&oncePredicate, ^{  
        sharedPhotos = [self loadPhotos];  
    });  
    return sharedPhotos;  
}
```



Guarantees block is called exactly once

Do Use `dispatch_once()` to Initialize Global State

```
+ (NSArray<NSImage *>)sharedPhotos {  
    static NSArray<NSImage *> *sharedPhotos;  
    static dispatch_once_t oncePredicate;  
    dispatch_once(&oncePredicate, ^{  
        sharedPhotos = [self loadPhotos];  
    });  
    return sharedPhotos;  
}
```



Guarantees block is called exactly once

Predicate must be **global** or **static variable**

Do Not Store `dispatch_once_t` in Instance Variables

```
@implementation Album {  
    dispatch_once_t oncePredicate;  
}  
  
dispatch_once(&oncePredicate, ^{  
    self.photos = [self loadPhotos];  
});
```



Do Not Store `dispatch_once_t` in Instance Variables

```
@implementation Album {  
    dispatch_once_t oncePredicate;  
}
```

```
    dispatch_once(&oncePredicate, ^{  
        self.photos = [self loadPhotos];  
    });
```



Call to 'dispatch_once' uses instance variable for predicate

Do Not Store `dispatch_once_t` in Instance Variables

```
@implementation Album {  
    NSLock *photosLock;  
}  
  
self.photos = [self loadPhotos];
```

Instead, use a lock to guarantee initialization performed once

Do Not Store `dispatch_once_t` in Instance Variables

```
@implementation Album {  
    NSLock *photosLock;  
}  
  
[photosLock lock];  
  
self.photos = [self loadPhotos];
```

Instead, use a lock to guarantee initialization performed once

Do Not Store `dispatch_once_t` in Instance Variables

```
@implementation Album {  
    NSLock *photosLock;  
}  
  
[photosLock lock];  
if (self.photos == nil) {  
    self.photos = [self loadPhotos];  
}
```

Instead, use a lock to guarantee initialization performed once

Do Not Store `dispatch_once_t` in Instance Variables

```
@implementation Album {  
    NSLock *photosLock;  
  
    [photosLock lock];  
    if (self.photos == nil) {  
        self.photos = [self loadPhotos];  
    }  
    [photosLock unlock];
```



Instead, use a lock to guarantee initialization performed once

Do Not Auto-Synthesize NSMutable copy Properties

Setter calls `-copy`, which yields an immutable copy

```
@property (copy) NSMutableArray<NSImage *> *photos;  
  
- (void)replaceWithStockPhoto:(NSImage *)stockPhoto {  
    self.photos = [NSMutableArray<NSImage *> new];  
    [self.photos addObject:stockPhoto];  
}
```

Do Not Auto-Synthesize NSMutable copy Properties

Setter calls `-copy`, which yields an immutable copy

```
@property (copy) NSMutableArray<NSImage *> *photos;  
  
- (void)replaceWithStockPhoto:(NSImage *)stockPhoto {  
    self.photos = [NSMutableArray<NSImage *> new];  
    [self.photos addObject:stockPhoto];  
}  
-[__NSArray0 addObject:]: unrecognized selector sent to instance
```

Do Not Auto-Synthesize NSMutable copy Properties

Setter calls `-copy`, which yields an immutable copy

```
@property (copy) NSMutableArray<NSImage *> *photos;
```



Property of mutable type has 'copy' attribute

```
- (void)replaceWithStockPhoto:(NSImage *)stockPhoto {
    self.photos = [NSMutableArray<NSImage *> new];
    [self.photos addObject:stockPhoto];
}
```

Write `NSMutable` copy Accessors Explicitly

Instead, write explicit setter that calls `-mutableCopy`

```
@property (copy) NSMutableArray<NSImage *> *photos;
```



Property of mutable type has 'copy' attribute

Write `NSMutable` copy Accessors Explicitly


Instead, write explicit setter that calls `-mutableCopy`

```
@property (copy) NSMutableArray<NSImage *> *photos;  
  
@synthesize photos = _photos;  
  
- (void)setPhotos:(NSMutableArray<NSImage *> *)photos {  
    _photos = [photos mutableCopy];  
}
```



Run Analyzer on Your Code!


Supports Objective-C, C, C++

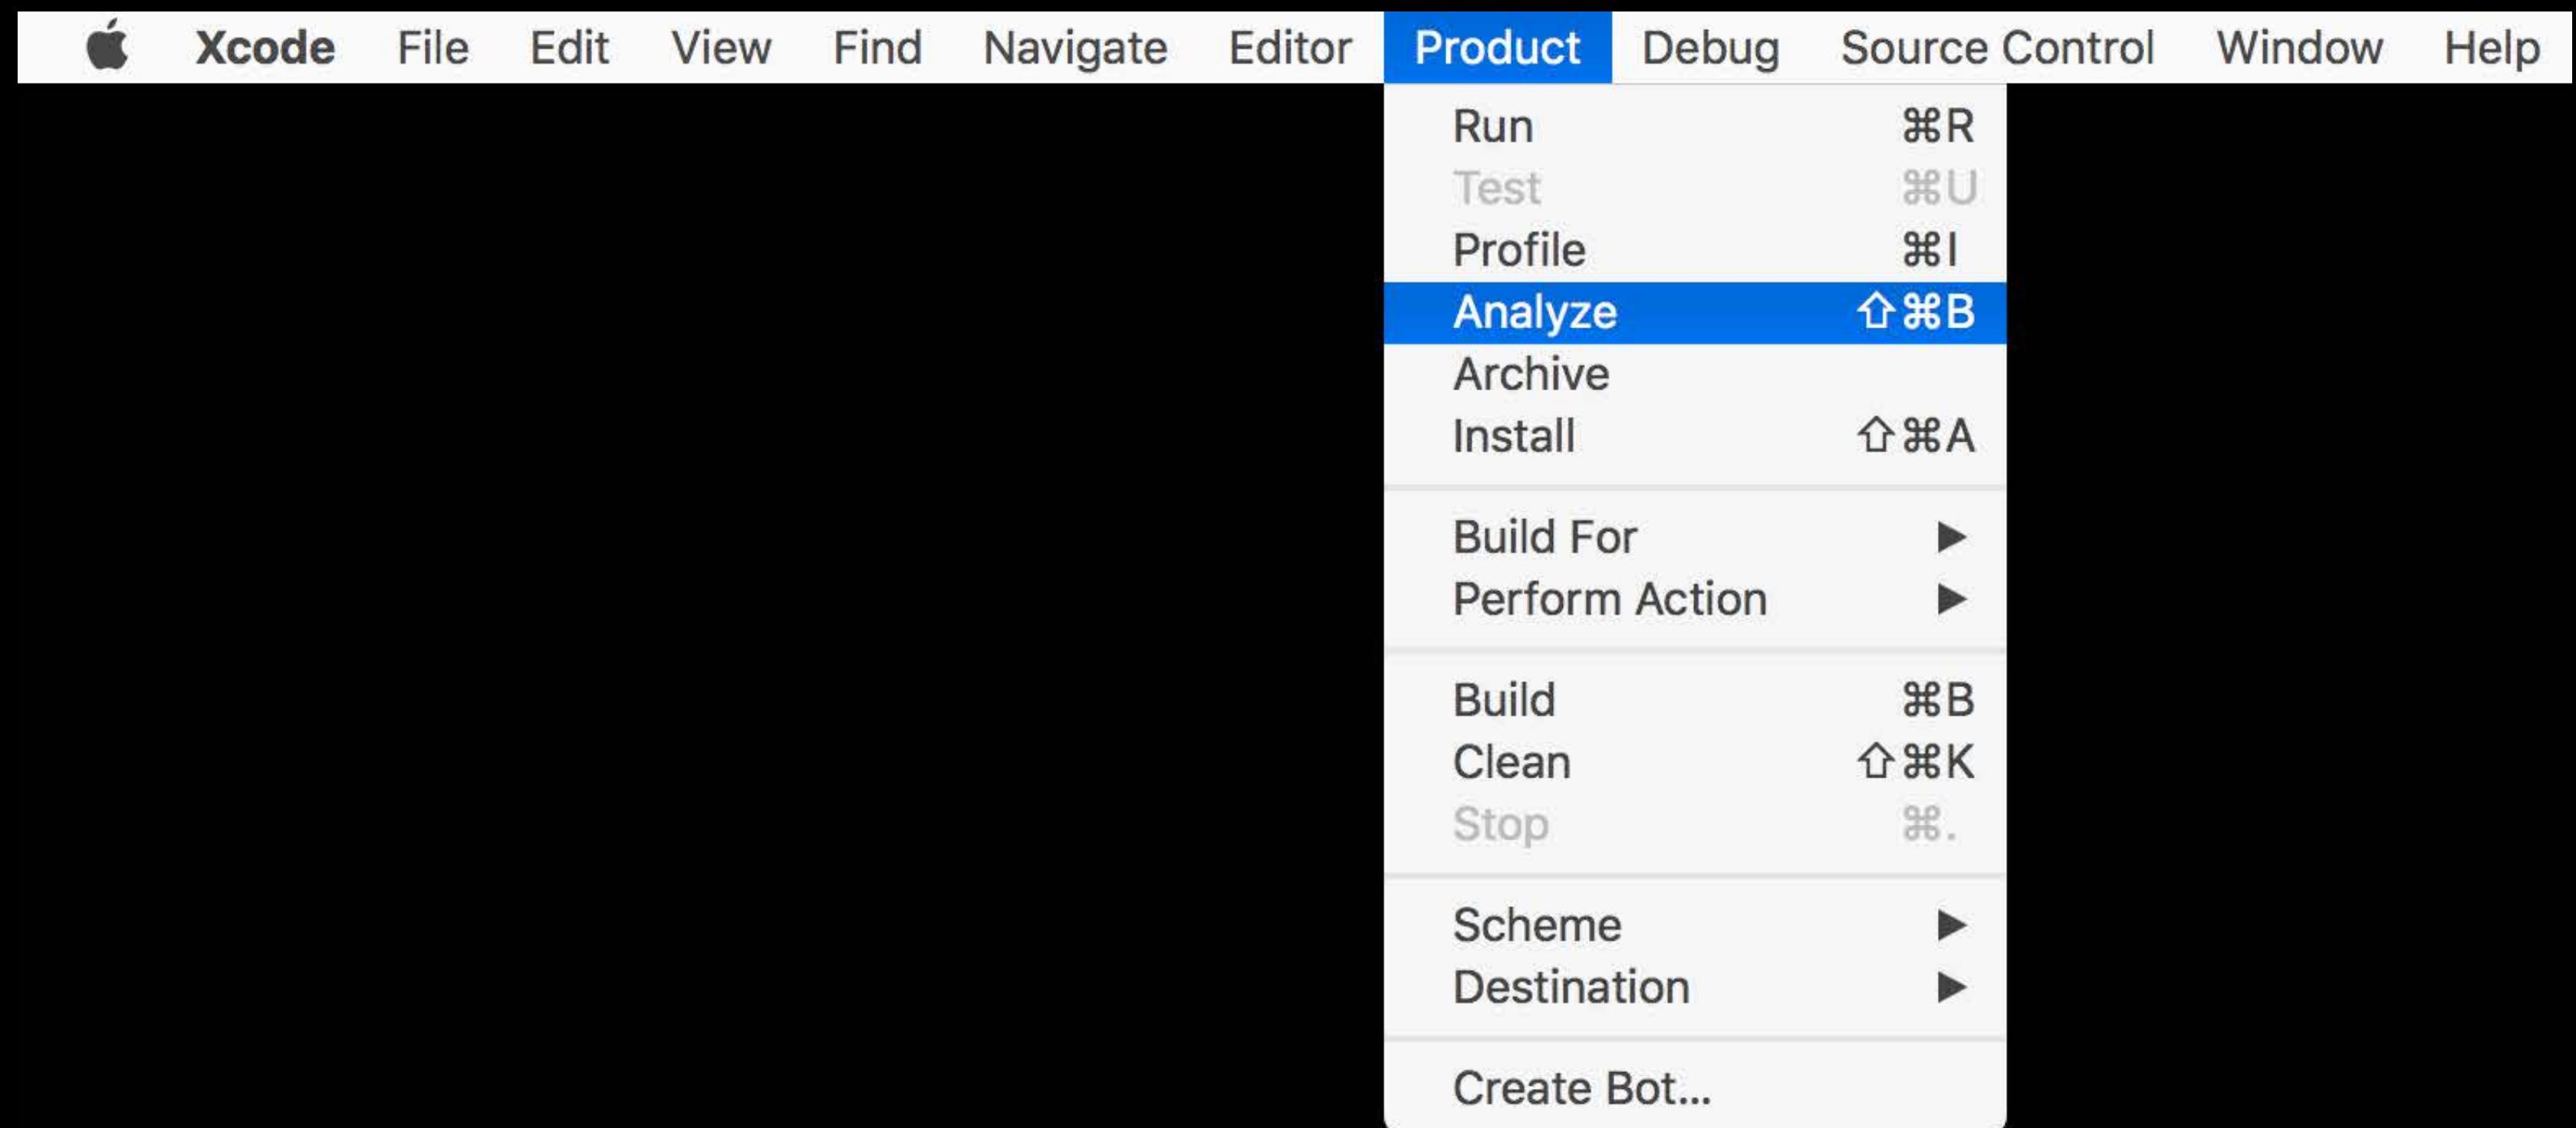

Run Analyzer on Your Code!

Supports Objective-C, C, C++


Analyze during build

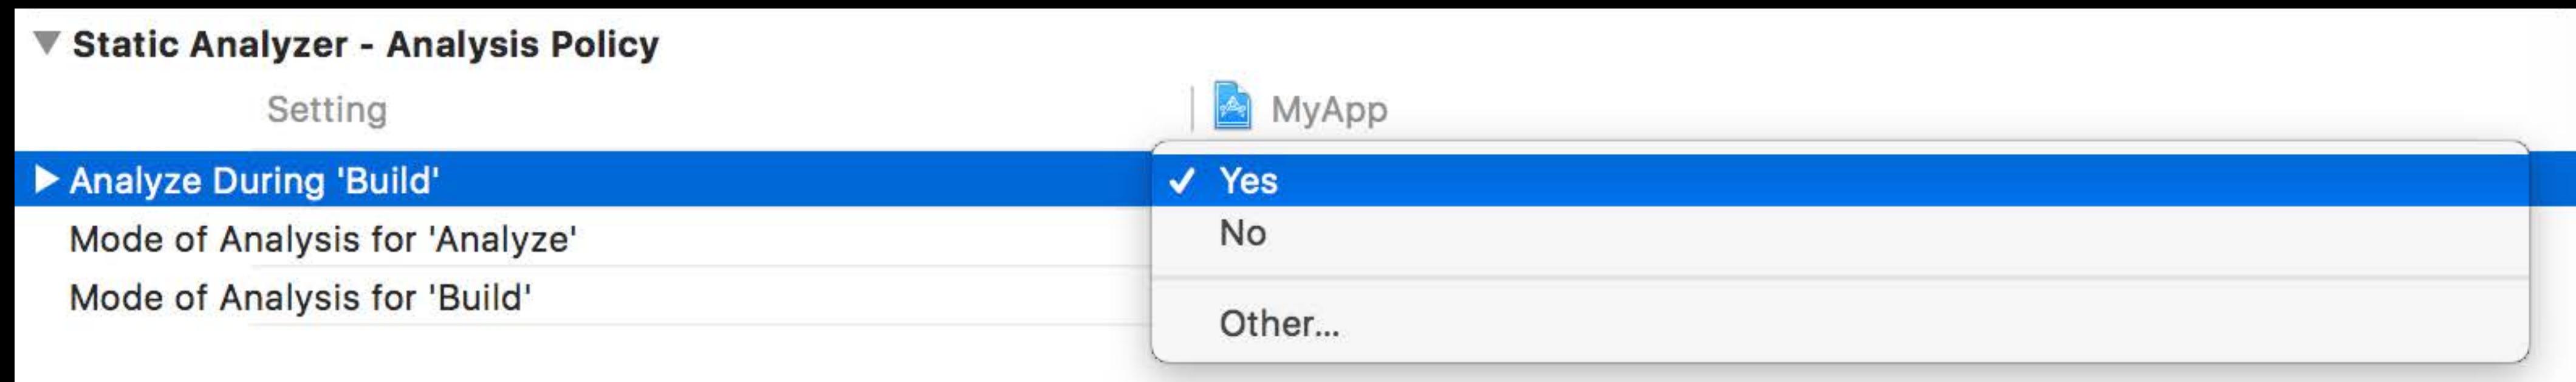

Run Analyzer on Your Code!

Supports Objective-C, C, C++

Analyze during build

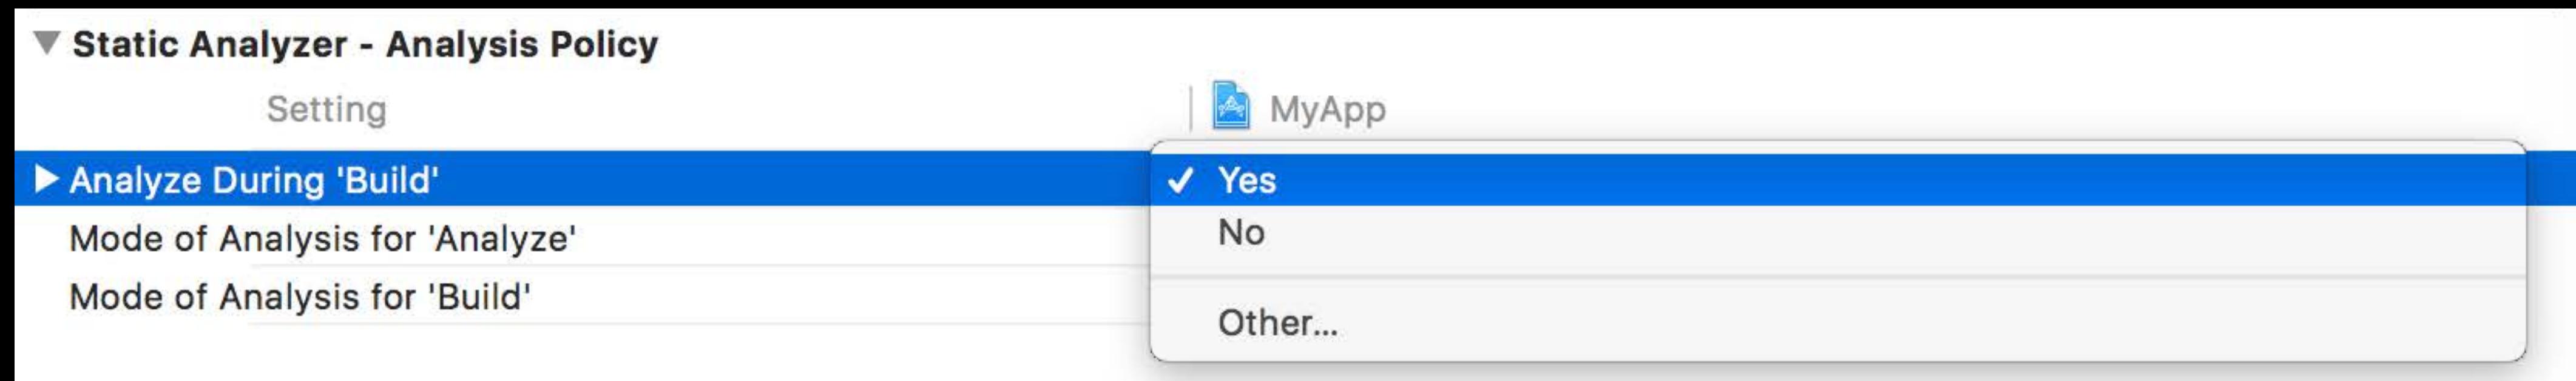

New Warnings

Duncan Exon Smith, Clang Frontend Manager

Capturing Parameters in Blocks with ARC

Most parameters are safe to capture in blocks

Capturing Parameters in Blocks with ARC

Most parameters are safe to capture in blocks

```
- (void)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker {
    [dict enumerateKeysAndObjectsUsingBlock:^(id key, id obj, BOOL *stop) {
        if ([checker checkObject:obj forKey:key]) return;
        *stop = YES;
    }];
}
```

Capturing Parameters in Blocks with ARC

Most parameters are safe to capture in blocks

```
- (void)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker {  
    [dict enumerateKeysAndObjectsUsingBlock:^(id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES;  
    }];  
}
```

Capturing Parameters in Blocks with ARC

Most parameters are safe to capture in blocks

```
- (void)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker {  
    [dict enumerateKeysAndObjectsUsingBlock:^(id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES;  
    }];  
}
```

Capturing Parameters in Blocks with ARC

Most parameters are safe to capture in blocks

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [NSError errorWithDomain:...];  
    }];  
    return isValid;  
}
```

Capturing Parameters in Blocks with ARC

Most parameters are safe to capture in blocks

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [NSError errorWithDomain:...];  
    }];  
    return isValid;  
}
```

Capturing Parameters in Blocks with ARC

Most parameters are safe to capture in blocks

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [NSError errorWithDomain:...];  
    }];  
    return isValid;  
}
```

Capturing Parameters in Blocks with ARC

Most parameters are safe to capture in blocks

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [NSError errorWithDomain:...];  
    }];  
    return isValid;  
}
```

Capturing Parameters in Blocks with ARC

Most parameters are safe to capture in blocks

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [NSError errorWithDomain:...];  
    }];  
    return isValid;  
}
```

Capturing Parameters in Blocks with ARC

Most parameters are safe to capture in blocks

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [NSError errorWithDomain:...];  
    }];  
    return isValid;  
}
```

Assigning to Out Parameters in Blocks Is Unsafe

Out parameters are implicitly `__autoreleasing` in ARC

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [NSError errorWithDomain:...];  
    }];  
    return isValid;  
}
```

Assigning to Out Parameters in Blocks Is Unsafe

Out parameters are implicitly `__autoreleasing` in ARC

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
  
    __block BOOL isValid = YES;  
  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [[[NSError alloc] initWithDomain:@"..."] autorelease];  
    }];  
    return isValid;  
}
```

```
//Assigning to Out Parameters in Blocks Is Unsafe
//Out parameters are implicitly __autoreleasing in ARC

- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker
                           error:(NSError **)error {
    __block BOOL isValid = YES;
    [dict enumerateKeysAndObjectsUsingBlock:^(id key, id obj, BOOL *stop) {
        if ([checker checkObject:obj forKey:key]) return;
        *stop = YES; isValid = NO;
        if (error) *error = [[[NSError errorWithDomain:@"..."] retain] autorelease];
    }];
    return isValid;
}

- (void)enumerateKeysAndObjectsUsingBlock:(void (^)(KeyT key, ObjectT obj, BOOL *stop))block
@autoreleasepool {
    ...
}
```

```
//Assigning to Out Parameters in Blocks Is Unsafe  
//Out parameters are implicitly __autoreleasing in ARC
```

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [[[NSError alloc] initWithDomain:@"..."] autorelease];  
    }];  
    return isValid;  
}
```

```
- (void)enumerateKeysAndObjectsUsingBlock:(void (^)(KeyT key, ObjectT obj, BOOL *stop)block {  
    @autoreleasepool {  
        ...  
    }  
}
```

```
//Assigning to Out Parameters in Blocks Is Unsafe
//Out parameters are implicitly __autoreleasing in ARC

- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker
                           error:(NSError **)error {
    __block BOOL isValid = YES;
    [dict enumerateKeysAndObjectsUsingBlock:^(id key, id obj, BOOL *stop) {
        if ([checker checkObject:obj forKey:key]) return;
        *stop = YES; isValid = NO;
        if (error) *error = [[[NSError errorWithDomain:@"..."] retain] autorelease];
    }];
    return isValid;
}

- (void)enumerateKeysAndObjectsUsingBlock:(void (^)(KeyT key, ObjectT obj, BOOL *stop))block
@autoreleasepool {
    ...
}
```

Assigning to Out Parameters in Blocks Is Unsafe

Out parameters are implicitly `__autoreleasing` in ARC

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
  
    __block BOOL isValid = YES;  
  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [NSError errorWithDomain:...];  Block captures an autoreleasing out-parameter  
    }];  
  
    return isValid;  
}
```

Assigning to Out Parameters in Blocks Is Unsafe

Out parameters are implicitly `__autoreleasing` in ARC

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError *__strong *)error {  
    __block BOOL isValid = YES;  
    [dict enumerateKeysAndObjectsUsingBlock:^(id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [NSError errorWithDomain:...];  Block captures an autoreleasing out-parameter  
    }];  
    return isValid;  
}
```

Capture a Strong Out Parameter

If all callers use ARC, mark out parameter as `__strong` to keep value alive

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError *__strong *)error {  
    __block BOOL isValid = YES;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [NSError errorWithDomain:...];  Block captures an autoreleasing out-parameter  
    }];  
    return isValid;  
}
```

Capture a Strong Out Parameter

If all callers use ARC, mark out parameter as `__strong` to keep value alive

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError *__strong *)error {  
    __block BOOL isValid = YES;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [NSError errorWithDomain:...];  
    }];  
    return isValid;  
}
```

Capture a Strong Out Parameter

If all callers use ARC, mark out parameter as `__strong` to keep value alive

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError *          *)error {  
  
    __block BOOL isValid = YES;  
  
    [dict enumerateKeysAndObjectsUsingBlock:^(id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        if (error) *error = [NSError errorWithDomain:...];  
    }];  
    return isValid;  
}
```

Capture a Strong Out Parameter

If all callers use ARC, mark out parameter as `__strong` to keep value alive

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
    __block NSError *strongError = nil;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        strongError = [NSError errorWithDomain:...];  
    }];  
    if (error) *error = strongError;  
    return isValid;  
}
```

Capture a Strong Local Variable

Without changing the API, use a local `__block` variable to keep value alive

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
    __block NSError *strongError = nil;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        strongError = [NSError errorWithDomain:...];  
    }];  
    if (error) *error = strongError;  
    return isValid;  
}
```

Capture a Strong Local Variable

Without changing the API, use a local `__block` variable to keep value alive

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
    __block NSError *strongError = nil;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        strongError = [NSError errorWithDomain:...];  
    }];  
    if (error) *error = strongError;  
    return isValid;  
}
```

Capture a Strong Local Variable

Without changing the API, use a local `__block` variable to keep value alive

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
    __block NSError *strongError = nil;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        strongError = [NSError errorWithDomain:...];  
    }];  
    if (error) *error = strongError;  
    return isValid;  
}
```

Capture a Strong Local Variable

Without changing the API, use a local `__block` variable to keep value alive

```
- (BOOL)validateDictionary:(NSDictionary *)dict usingChecker:(Checker *)checker  
                           error:(NSError **)error {  
    __block BOOL isValid = YES;  
    __block NSError *strongError = nil;  
    [dict enumerateKeysAndObjectsUsingBlock:^(^id key, id obj, BOOL *stop) {  
        if ([checker checkObject:obj forKey:key]) return;  
        *stop = YES; isValid = NO;  
        strongError = [NSError errorWithDomain:...];  
    }];  
    if (error) *error = strongError;  
    return isValid;  
}
```

Declaring Functions without Parameters

Non-prototype declarations in C and Objective-C

Declaring Functions without Parameters

Non-prototype declarations in C and Objective-C

```
int foo();
```

Declaring Functions without Parameters

Non-prototype declarations in C and Objective-C

```
int foo();  
...  
foo();  
foo(1, 2, 3);  
foo(&x, y);
```

Declaring Functions without Parameters

Non-prototype declarations in C and Objective-C

```
int foo();  
...  
foo();  
foo(1, 2, 3);  
foo(&x, y);
```

An empty parameter list does not declare a prototype

Declaring Functions without Parameters

Non-prototype declarations in C and Objective-C

```
int foo();  
...  
foo();  
foo(1, 2, 3);  
foo(&x, y);
```

An empty parameter list does not declare a prototype

C language decision from 1977 that we are stuck with

Declaring Functions without Parameters

Non-prototype declarations in C and Objective-C

```
int foo();  
...  
foo();  
foo(1, 2, 3);  
foo(&x, y);
```

An empty parameter list does not declare a prototype

C language decision from 1977 that we are stuck with

Error-prone and ill-advised

Strict Prototypes

Warning for non-prototype declarations in C and Objective-C

```
int foo();
```

```
...
```

```
foo();
```

```
foo(1, 2, 3);
```

```
foo(&x, y);
```



This function declaration is not a prototype

An empty parameter list does not declare a prototype

C language decision from 1977 that we are stuck with

Error-prone and ill-advised

Strict Prototypes

Warning for non-prototype declarations in C and Objective-C

```
int foo( );  
...  
foo();  
foo(1, 2, 3);  
foo(&x, y);
```



This function declaration is not a prototype

Strict Prototypes

Warning for non-prototype declarations in C and Objective-C

```
int foo(void);  
...  
foo();  
foo(1, 2, 3);  
foo(&x, y);
```



This function declaration is not a prototype

Strict Prototypes

Warning for non-prototype declarations in C and Objective-C

```
int foo(void);  
...  
foo();  
foo(1, 2, 3);  
foo(&x, y);
```



Too many arguments to function call; expected 0
Too many arguments to function call; expected 0

Strict Prototypes

Warning for non-prototype declarations in C and Objective-C

```
int takesBlock(int (^block)());
```

```
- (void)takesBlock:(int (^)(()))block;
```

Strict Prototypes

Warning for non-prototype declarations in C and Objective-C

```
int takesBlock(int (^block)());
```



This block declaration is not a prototype

```
- (void)takesBlock:(int (^)())block;
```



This block declaration is not a prototype

Strict Prototypes

Warning for non-prototype declarations in C and Objective-C

```
int takesBlock(int (^block)(void));
```



This block declaration is not a prototype

```
- (void)takesBlock:(int (^)(void))block;
```



This block declaration is not a prototype

Strict Prototypes

Warning for non-prototype declarations in C and Objective-C

```
int takesBlock(int (^block)(void));  
  
- (void)takesBlock:(int (^)(void))block;
```

Strict Prototypes

Warning for non-prototype declarations in C and Objective-C

```
int takesBlock(int (^block)(void));  
  
- (void)takesBlock:(int (^)(void))block;  
  
[self takesBlock:^(int a, int b, int c) {  
    return a + b + c;  
}];
```

Strict Prototypes

Warning for non-prototype declarations in C and Objective-C

```
int takesBlock(int (^block)(void));
```

```
- (void)takesBlock:(int (^)(void))block;
```

```
[self takesBlock:^(int a, int b, int c) {  
    return a + b + c;  
}];
```




Incompatible block pointer types

Enable Warnings in Build Settings

Validate settings and upgrade warnings to errors



Enable Warnings in Build Settings

Validate settings and upgrade warnings to errors

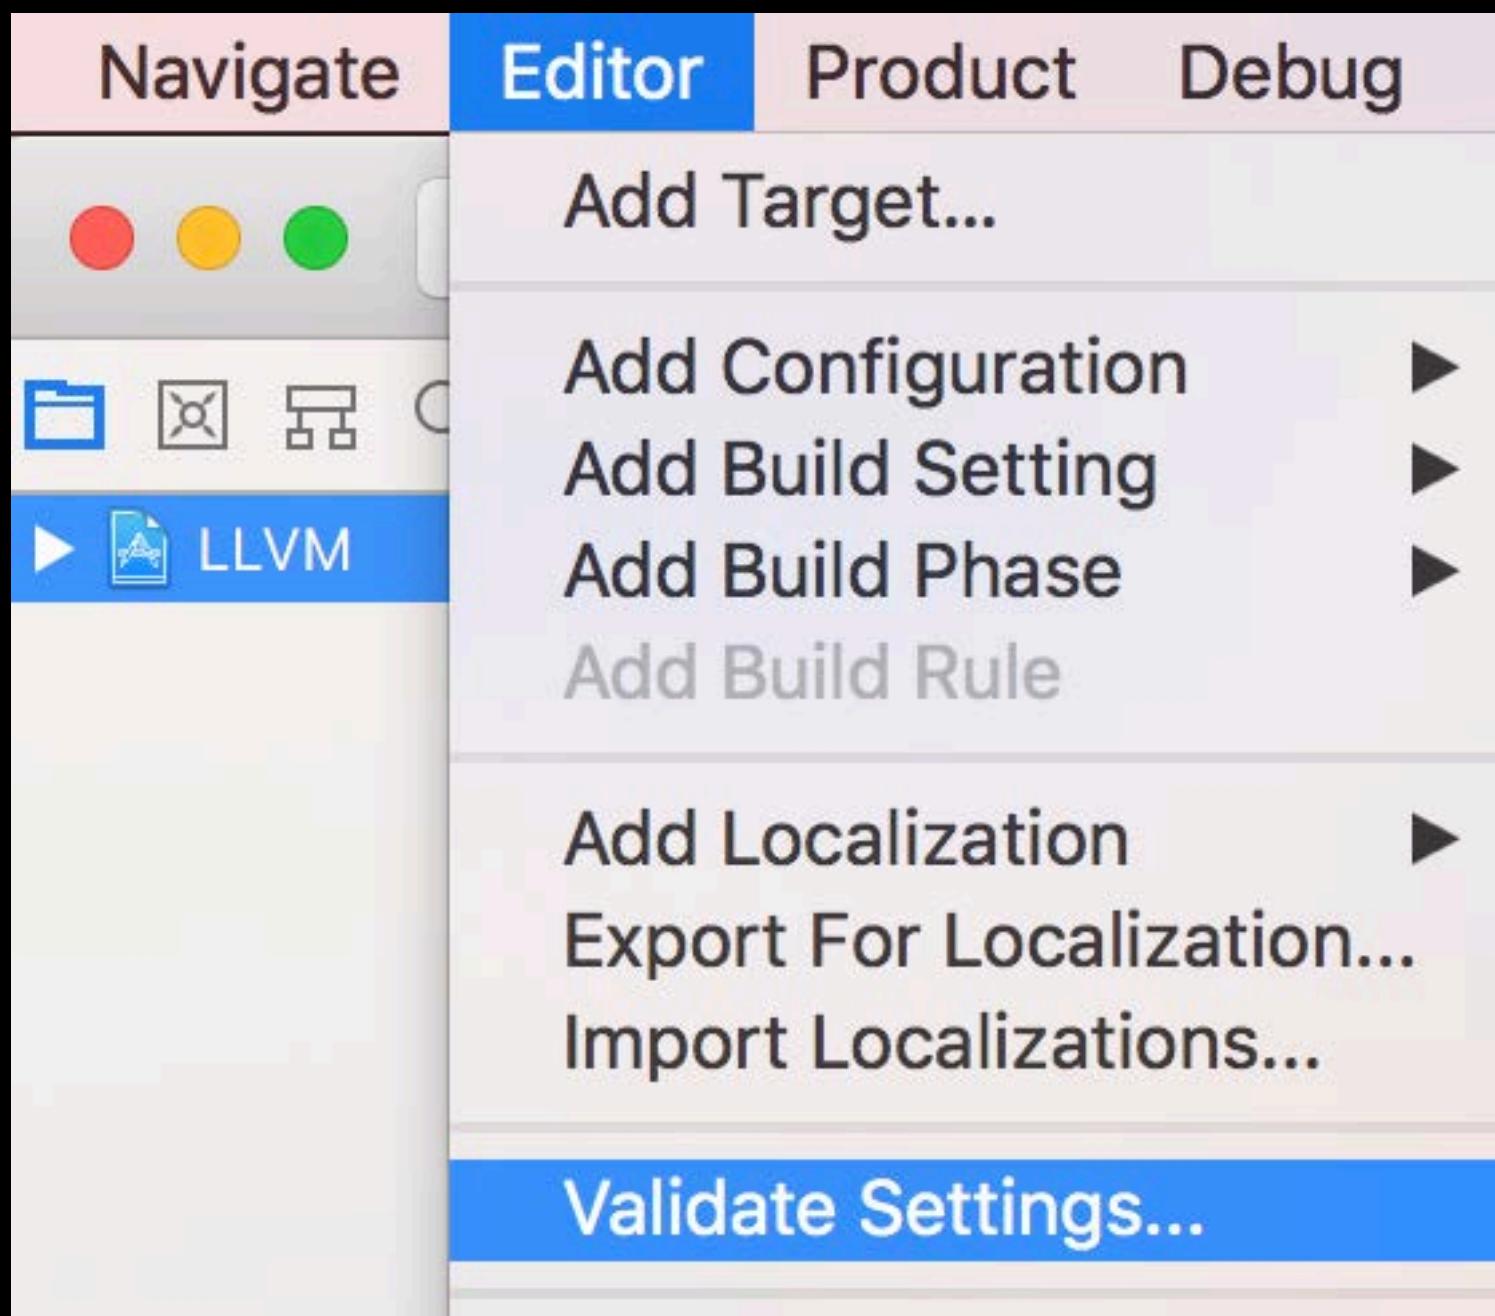

Enable Warnings in Build Settings

Validate settings and upgrade warnings to errors

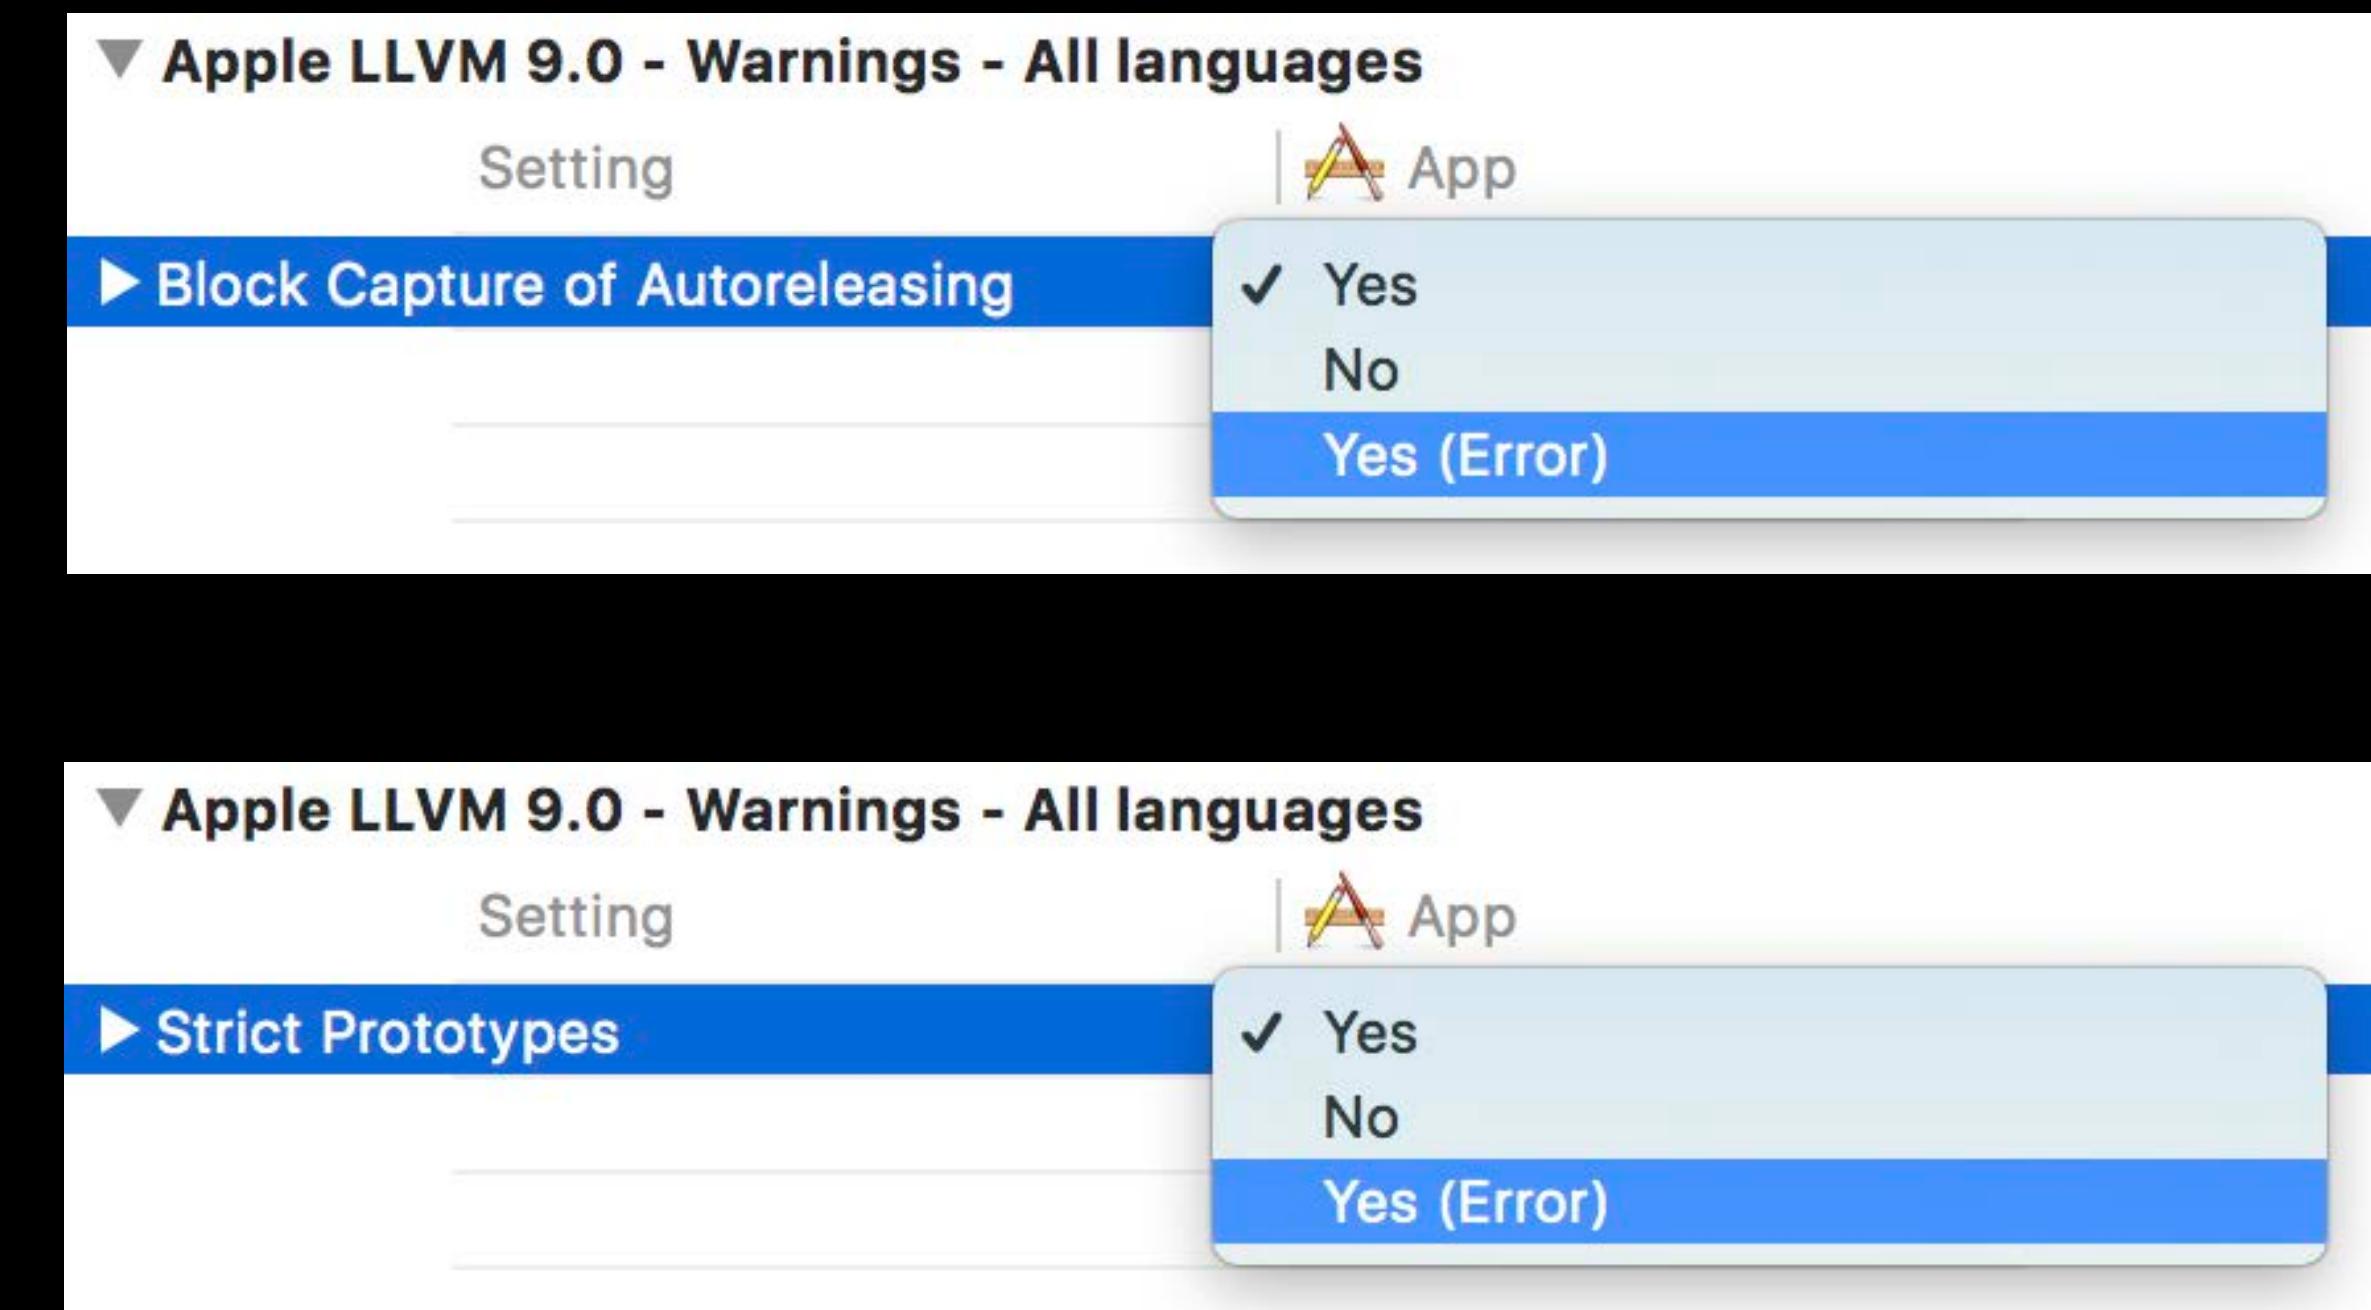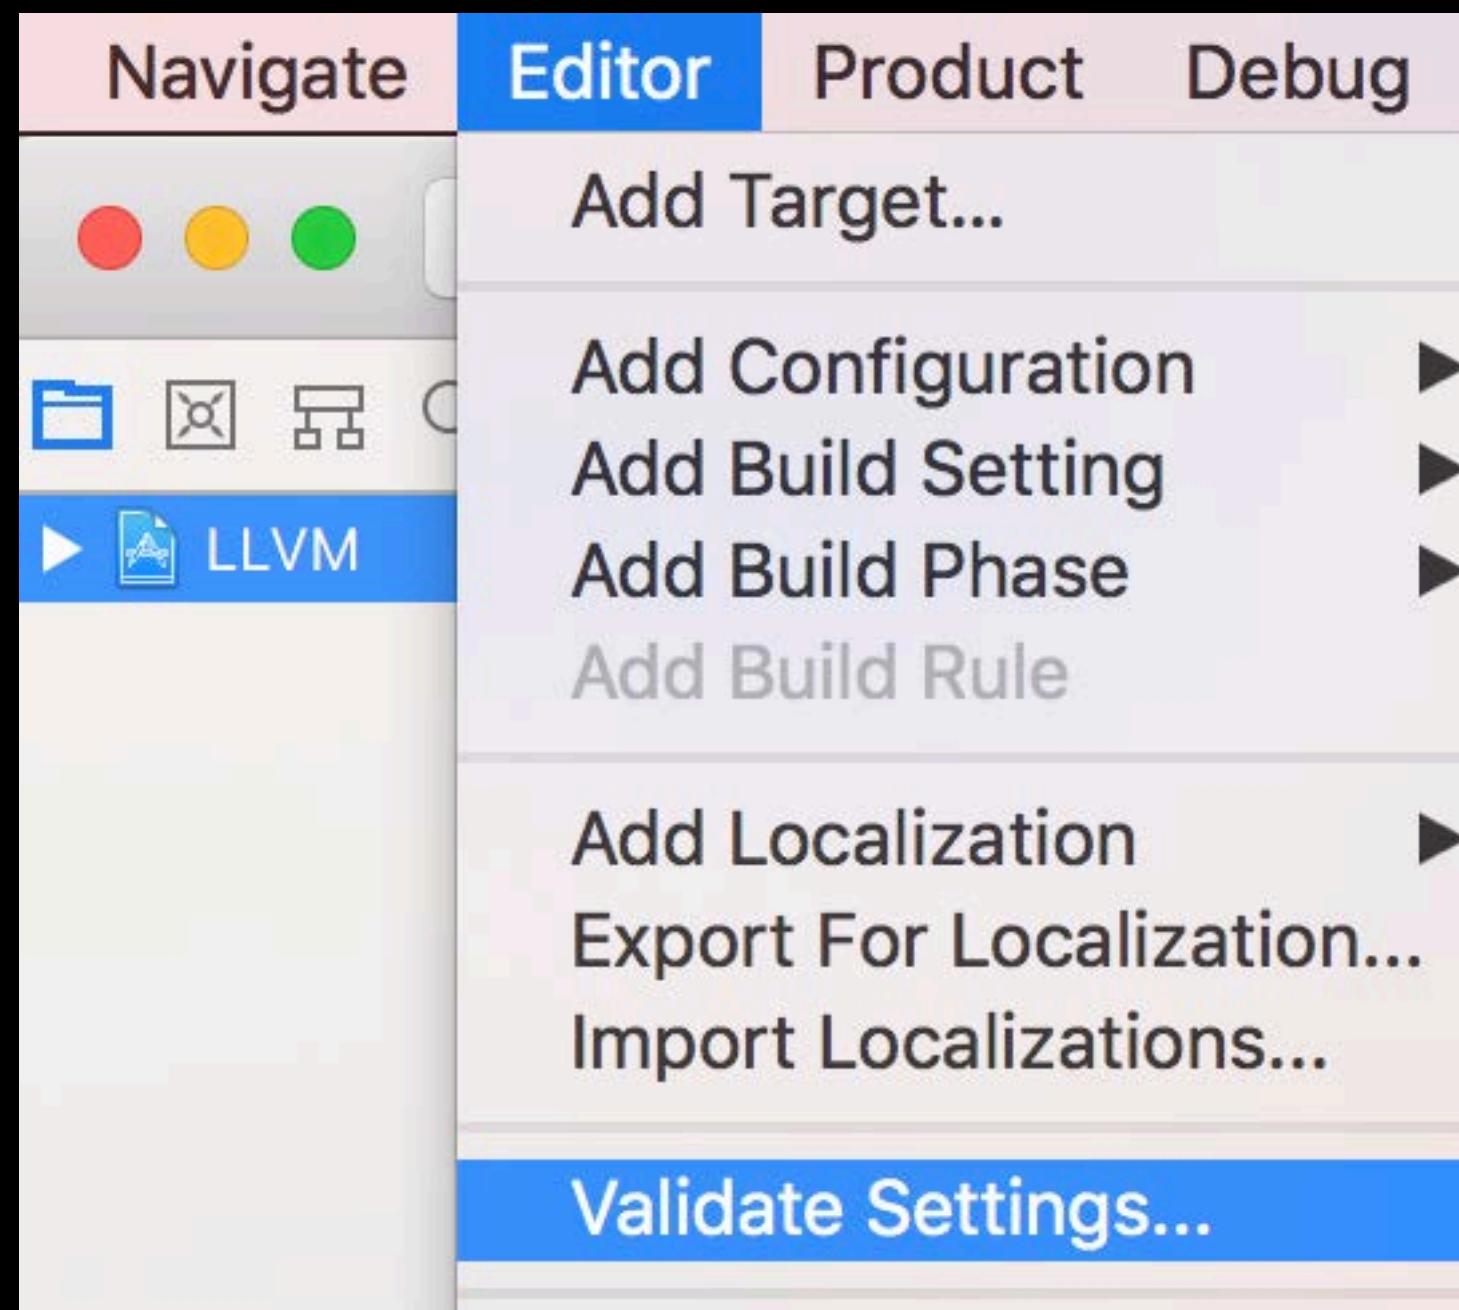

C++ Refactoring

Extract function

If to switch

Rename global variable

Rename template specializations

Rename field

Missing abstract function override

Rename member function

Missing switch cases

Rename class

Repeated reference expression

Switch to if

Extract templated function

Rename function

Missing function definition

Rename local variable

```
return llvm::EmitGEPOffset(Builder, DL, GEP);
}

/// Return true if it is desirable to convert an integer computation from a
/// given bit width to a new bit width.
/// We don't want to convert from a legal to an illegal type or from a smaller
/// to a larger illegal type. A width of '1' is always treated as a legal type
/// because i1 is a fundamental type in IR, and there are many specialized
/// optimizations for i1 types.
bool InstCombiner::shouldChangeType(unsigned FromWidth,
                                     unsigned ToWidth) const {
    bool FromLegal = FromWidth == 1 || DL.isLegalInteger(FromWidth);
    bool ToLegal = ToWidth == 1 || DL.isLegalInteger(ToWidth);

    // If this is a legal integer from type, and the result would be an illegal
    // type, don't do the transformation.
    if (FromLegal && !ToLegal)
        return false;

    // Otherwise, if both are illegal, do not increase the size of the result. We
    // do allow things like i160 -> i64, but not i64 -> i160.
    if (!FromLegal && !ToLegal && ToWidth > FromWidth)
        return false;
```

MacBook Pro

```
return llvm::EmitGEPOffset(Builder, DL, GEP);  
}  
  
/// Return true if it is desirable to convert an integer computation from a  
/// given bit width to a new bit width.  
/// We don't want to convert from a legal to an illegal type or from a smaller  
/// to a larger illegal type. A width of '1' is always treated as a legal type  
/// because i1 is a fundamental type in IR, and there are many specialized  
/// optimizations.  
bool InstCombiner::shouldChangeType(unsigned FromWidth,  
                                    unsigned ToWidth) const {  
    bool FromLegal = FromWidth == 1 || DL.isLegalInteger(FromWidth);  
    bool ToLegal = ToWidth == 1 || DL.isLegalInteger(ToWidth);  
  
    // If this is a legal integer from type, and the result would be an illegal  
    // type, don't do the transformation.  
    if (FromLegal && !ToLegal)  
        return false;  
  
    // Otherwise, if both are illegal, do not increase the size of the result. We  
    // do allow things like i160 -> i64, but not i64 -> i160.  
    if (!FromLegal && !ToLegal && ToWidth > FromWidth)  
        return false;
```

MacBook Pro

Value *InstCombiner::EmitGEPOffset(User *GEP) {
 return llvm::EmitGEPOffset(Builder, DL, GEP);
/// optimizations for i1 types.
bool InstCombiner::shouldChangeType(unsigned FromWidth,
 unsigned ToWidth) const {
// i1 types.
bool InstCombiner::shouldChangeType(Type *From, Type *To) const {
 assert(From->isIntegerTy() && To->isIntegerTy());
// if C1 and C2 are constants.
bool InstCombiner::SimplifyAssociativeOrCommutative(BinaryOperator &I) {
 Instruction::BinaryOps Opcode = I.getOpcode();
// (e. g. "(A*B)+(A*C)" -> "A*(B+C)").
Value *InstCombiner::tryFactorization(InstCombiner::BuilderTy *Builder,
 BinaryOperator &I,
// Returns the simplified value, or null if it didn't simplify.
Value *InstCombiner::SimplifyUsingDistributiveLaws(BinaryOperator &I) {
 Value *LHS = I.getOperand(0), *RHS = I.getOperand(1);
// constant zero (which is the 'negate' form).
Value *InstCombiner::dyn_castNegVal(Value *V) const {

MacBook Pro

Rename

All (263) Code (258) File Names (0) Comments (5) Other (0)

InstructionCombining.cpp

```
Value *InstructionCombiner::EmitGEPOffset(User *GEP) {
    return llvm::EmitGEPOffset(Builder, DL, GEP);
/// optimizations for i1 types.
bool InstructionCombiner::shouldChangeType(unsigned FromWidth,
                                             unsigned ToWidth) const {
    /// i1 types.
    bool InstructionCombiner::shouldChangeType(Type *From, Type *To) const {
        assert(From->isIntegerTy() && To->isIntegerTy());
        /// if C1 and C2 are constants.
        bool InstructionCombiner::SimplifyAssociativeOrCommutative(BinaryOperator &I) {
            Instruction::BinaryOps Opcode = I.getOpcode();
            /// (e. g. "(A*B)+(A*C)" -> "A*(B+C)").
            Value *InstructionCombiner::tryFactorization(InstructionCombiner::BuilderTy
                                                         *Builder,
                                                         BinaryOperator &I,
            /// Returns the simplified value, or null if it didn't simplify.
            Value *InstructionCombiner::SimplifyUsingDistributiveLaws(BinaryOperator &I) {
                Value *LHS = I.getOperand(0), *RHS = I.getOperand(1);
                /// constant zero (which is the 'negate' form).
```

MacBook Pro

```
return llvm::EmitGEPOffset(Builder, DL, GEP);
}

/// Return true if it is desirable to convert an integer computation from a
/// given bit width to a new bit width.
/// We don't want to convert from a legal to an illegal type or from a smaller
/// to a larger illegal type. A width of '1' is always treated as a legal type
/// because i1 is a fundamental type in IR, and there are many specialized
/// optimizations for i1 types.
bool InstructionCombiner::shouldChangeType(unsigned FromWidth,
                                             unsigned ToWidth) const {
    bool FromLegal = FromWidth == 1 || DL.isLegalInteger(FromWidth);
    bool ToLegal = ToWidth == 1 || DL.isLegalInteger(ToWidth);

    // If this is a legal integer from type, and the result would be an illegal
    // type, don't do the transformation.
    if (FromLegal && !ToLegal)
        return false;

    // Otherwise, if both are illegal, do not increase the size of the result. We
    // do allow things like i160 -> i64, but not i64 -> i160.
    if (!FromLegal && !ToLegal && ToWidth > FromWidth)
        return false;
```

MacBook Pro

```
///  
/// This class provides both the logic to recursively visit instructions and  
/// combine them.  
class LLVM_LIBRARY_VISIBILITY InstructionCombiner  
    : public InstVisitor<InstructionCombiner, Instruction *> {  
    // FIXME: These members shouldn't be public.  
  
public:  
    /// \brief A worklist of the instructions that need to be simplified.  
    InstCombineWorklist &Worklist;  
  
    /// \brief An IRBuilder that automatically inserts new instructions into the  
    /// worklist.  
    typedef IRBuilder<TargetFolder, IRBuilderCallbackInserter> BuilderTy;  
    BuilderTy *Builder;  
  
private:  
    // Mode in which we are running the combiner.  
    const bool MinimizeSize;  
    // Enable combines that trigger rarely but are costly in compiletime.  
    const bool ExpensiveCombines;  
  
    AliasAnalysis *AA;
```

MacBook Pro

```
///  
/// This class provides both the logic to recursively visit instructions and  
/// combine them.  
class LLVM_LIBRARY_VISIBILITY InstructionCombiner  
    : public InstVisitor<InstructionCombiner, Instruction *> {  
    // FIXME: These members shouldn't be public.  
public:  
    /// \brief A worklist of the instructions that need to be simplified.  
    InstCombineWorklist &Worklist;  
  
    /// \brief An IRBuilder that automatically inserts new instructions into the  
    /// worklist.  
    typedef IRBuilder<TargetFolder, IRBuilderCallbackInserter> BuilderTy;  
    BuilderTy *Builder;  
  
private:  
    // Mode in which we are running the combiner.  
    const bool MinimizeSize;  
    // Enable combines that trigger rarely but are costly in compiletime.  
    const bool ExpensiveCombines;  
  
    AliasAnalysis *AA;
```

MacBook Pro

```
///  
/// This class provides both the logic to recursively visit instructions and  
/// combine them.  
class LLVM_LIBRARY_VISIBILITY InstructionCombiner  
    : public InstVisitor<InstructionCombiner, Instruction *> {  
    // FIXME: These members shouldn't be public.  
public:  
    /// \brief A worklist of the instructions that need to be simplified.  
    InstCombineWorklist &Worklist;  
  
    /// \brief An IRBuilder that automatically inserts new instructions into the  
    /// worklist.  
    typedef IRBuilder<TargetFolder, IRBuilderCallbackInserter> BuilderTy;  
    BuilderTy *Builder;  
  
private:  
    // Mode in which we are running the combiner.  
    const bool MinimizeSize;  
    // Enable combines that trigger rarely but are costly in compiletime.  
    const bool ExpensiveCombines;  
  
    AliasAnalysis *AA;
```

MacBook Pro

```
///  
/// This class provides both the logic to recursively visit instructions and  
/// combine them.  
class LLVM_LIBRARY_VISIBILITY InstructionCombiner  
    : public InstVisitor<InstructionCombiner, Instruction *> {  
    // FIXME: These members shouldn't be public.  
public:  
    /// \brief A worklist of the instructions that need to be simplified.  
    InstCombineWorklist &Worklist;  
  
    /// \brief An IRBuilder that automatically inserts new instructions into the  
    /// worklist.  
    typedef IRBuilder<TargetFolder, IRBuilderCallbackInserter> BuilderTy;  
    BuilderTy *Builder;  
  
private:  
    // Mode in which we are running the combiner.  
    const bool MinimizeSize;  
    // Enable combines that trigger rarely but are costly in compiletime.  
    const bool ExpensiveCombines;  
  
    AliasAnalysis *AA;
```

MacBook Pro

```
// Check for end. Only valid if ilist_sentinel_tracking<true>.
bool isEnd() const { return NodePtr ? NodePtr->isSentinel() : false; }

template <typename From> struct simplify_type;

/// Allow ilist_iterators to convert into pointers to a node automatically when
/// used by the dyn_cast, cast, isa mechanisms...
template <class OptionsT, bool IsConst>
struct simplify_type<ilist_iterator<OptionsT, false, IsConst>> {
    typedef ilist_iterator<OptionsT, false, IsConst> iterator;
    typedef typename iterator::pointer SimpleType;

    static SimpleType getSimplifiedValue(const iterator &Node) { return &*Node; }
};

template <class OptionsT, bool IsConst>
struct simplify_type<const ilist_iterator<OptionsT, false, IsConst>>
    : simplify_type<ilist_iterator<OptionsT, false, IsConst>> {};

} // end namespace llvm

#endif // LLVM_ADT_ILIST_ITERATOR_H
```

MacBook Pro

```
// Check for end. Only valid if ilist_sentinel_tracking<true>.
bool isEnd() const { return NodePtr ? NodePtr->isSentinel() : false; }

template <typename From> struct simplify_type;

/// Allow ilist_iterators to convert into pointers to a node automatically when
/// used by the dyn_cast, cast, isa mechanisms...
template <class OptionsT, bool IsConst>
struct simplify_type<ilist_iterator<OptionsT, false, IsConst>> {
    typedef ilist_iterator<OptionsT, false, IsConst> iterator;
    typedef typename iterator::pointer SimpleType;

    static SimpleType getSimplifiedValue(const iterator &Node) { return &*Node; }
};

template <class OptionsT, bool IsConst>
struct simplify_type<const ilist_iterator<OptionsT, false, IsConst>>
    : simplify_type<ilist_iterator<OptionsT, false, IsConst>> {};

} // end namespace llvm

#endif // LLVM_ADT_ILIST_ITERATOR_H
```

MacBook Pro

```
// Check for end. Only valid if ilist_sentinel_tracking<true>.
bool isEnd() const { return NodePtr ? NodePtr->isSentinel() : false; }

template <typename From> struct simplify_type;

/// Allow ilist_iterators to convert into pointers to a node automatically when
/// used by the dyn_cast, cast, isa mechanisms...
template <class OptionsT, bool IsConst>
struct simplify_type<ilist_iterator<OptionsT, false, IsConst>> {
    typedef ilist_iterator<OptionsT, false, IsConst> iterator;
    typedef typename iterator::pointer SimpleType;

    static SimpleType getSimplifiedValue(ilist_iterator<OptionsT, false, IsConst> &Node) { return &*Node; }
};

template <class OptionsT, bool IsConst>
struct simplify_type<const ilist_iterator<OptionsT, false, IsConst>>
    : simplify_type<ilist_iterator<OptionsT, false, IsConst>> {};

} // end namespace llvm

#endif // LLVM_ADT_ILIST_ITERATOR_H
```

MacBook Pro

Rename

All (27) Code (27) File Names (0) Comments (0) Other (0) Cancel Rename

ilist_iterator.h

```
static SimpleType getSimplifiedValue(const iterator &Node) { return &*Node; };
```

Casting.h

```
// An accessor to get the real value...
static SimpleType &getSimplifiedValue(From &Val) { return Val; };
```

RetType;

```
static RetType getSimplifiedValue(const From& Val) {
    return simplify_type<From>::getSimplifiedValue(const_cast<From&>(Val));}
```

```
typename simplify_type<SimpleFrom>::SimpleType>::doit(
    simplify_type<const From>::getSimplifiedValue(Val));}
```

```
typename simplify_type<SimpleFrom>::SimpleType>::doit(
    simplify_type<From>::getSimplifiedValue(Val));}
```

TrackingMDRef.h

```
static SimpleType getSimplifiedValue(TrackingMDRef &MD) { return MD.get(); }
```

MacBook Pro

Rename

All (27) Code (27) File Names (0) Comments (0) Other (0) Cancel Rename

ilist_iterator.h

```
static SimpleType simplified_value(const iterator &Node) { return &*Node; }  
};  
Casting.h  
// An accessor to get the real value...  
static SimpleType &simplified_value(From &Val) { return Val; }  
};  
RetType;  
static RetType simplified_value(const From& Val) {  
    return simplify_type<From>::simplified_value(const_cast<From&>(Val));  
}  
typename simplify_type<SimpleFrom>::SimpleType>::doit(  
    simplify_type<const From>::simplified_value(Val));  
}  
typename simplify_type<SimpleFrom>::SimpleType>::doit(  
    simplify_type<From>::simplified_value(Val));  
}  
TrackingMDRef.h  
static SimpleType simplified_value(TrackingMDRef &MD) { return MD.get(); }  
`.
```

MacBook Pro

```
// Check for end. Only valid if ilist_sentinel_tracking<true>.
bool isEnd() const { return NodePtr ? NodePtr->isSentinel() : false; }

template <typename From> struct simplify_type;

/// Allow ilist_iterators to convert into pointers to a node automatically when
/// used by the dyn_cast, cast, isa mechanisms...
template <class OptionsT, bool IsConst>
struct simplify_type<ilist_iterator<OptionsT, false, IsConst>> {
    typedef ilist_iterator<OptionsT, false, IsConst> iterator;
    typedef typename iterator::pointer SimpleType;

    static SimpleType simplified_value(const iterator &Node) { return &*Node; }
};

template <class OptionsT, bool IsConst>
struct simplify_type<const ilist_iterator<OptionsT, false, IsConst>>
    : simplify_type<ilist_iterator<OptionsT, false, IsConst>> {};

} // end namespace llvm

#endif // LLVM_ADT_ILIST_ITERATOR_H
```

MacBook Pro

```
// fact that they are automatically dereferenced, and are not involved with the
// template selection process... the default implementation is a noop.
//
template<typename From> struct simplify_type {
    typedef          From SimpleType;           // The real type this represents...

    // An accessor to get the real value...
    static SimpleType &simplified_value(From &Val) { return Val; }
};

template<typename From> struct simplify_type<const From> {
    typedef typename simplify_type<From>::SimpleType NonConstSimpleType;
    typedef typename add_const_past_pointer<NonConstSimpleType>::type
        SimpleType;
    typedef typename add_lvalue_reference_if_not_pointer<SimpleType>::type
        RetType;
    static RetType simplified_value(const From& Val) {
        return simplify_type<From>::simplified_value(const_cast<From&>(Val));
    }
};

// The core of the implementation of isa<X> is here; To and From should be
// the names of classes. This template can be specialized to customize the
```

```
// fact that they are automatically dereferenced, and are not involved with the
// template selection process... the default implementation is a noop.
//
template<typename From> struct simplify_type {
    typedef           From SimpleType;          // The real type this represents...

    // An accessor to get the real value...
    static SimpleType &simplified_value(From &Val) { return Val; }
};

template<typename From> struct simplify_type<const From> {
    typedef typename simplify_type<From>::SimpleType NonConstSimpleType;
    typedef typename add_const_past_pointer<NonConstSimpleType>::type
        SimpleType;
    typedef typename add_lvalue_reference_if_not_pointer<SimpleType>::type
        RetType;
    static RetType simplified_value(const From& Val) {
        return simplify_type<From>::simplified_value(const_cast<From&>(Val));
    }
};

// The core of the implementation of isa<X> is here; To and From should be
// the names of classes. This template can be specialized to customize the
```

LLVM < > Sources > Libraries > LLVMCore > Header Files > Constants.h > No Selection

```
void destroyConstantImpl();

public:
    ConstantInt(const ConstantInt &) = delete;

    static ConstantInt *getTrue(LLVMContext &Context);
    static ConstantInt *getFalse(LLVMContext &Context);
    static Constant *getTrue(Type *Ty);
    static Constant *getFalse(Type *Ty);

    /// If Ty is a vector type, return a Constant with a splat of the given
    /// value. Otherwise return a ConstantInt for the given value.
    static Constant *get(Type *Ty, uint64_t V, bool isSigned = false);

    /// Return a ConstantInt with the specified integer value for the specified
    /// type. If the type is wider than 64 bits, the value will be zero-extended
    /// to fit the type, unless isSigned is true, in which case the value will
    /// be interpreted as a 64-bit signed integer and sign-extended to fit
    /// the type.
    /// @brief Get a ConstantInt for a specific value.
    static ConstantInt *get(IntegerType *Ty, uint64_t V,
                           bool isSigned = false);
```

MacBook Pro

```
void destroyConstantImpl();

public:
    ConstantInt(const ConstantInt &) = delete;

    static ConstantInt *getTrue(LLVMContext &Context);
    static ConstantInt *getFalse(LLVMContext &Context);
    static Constant *getTrue(Type *Ty);
    static Constant *getFalse(Type *Ty);

    static ConstantInt *getMax(LLVMContext &Context);
    static ConstantInt *getMax(Type *Ty);

    /// If Ty is a vector type, return a Constant with a splat of the given
    /// value. Otherwise return a ConstantInt for the given value.
    static Constant *get(Type *Ty, uint64_t V, bool isSigned = false);

    /// Return a ConstantInt with the specified integer value for the specified
    /// type. If the type is wider than 64 bits, the value will be zero-extended
    /// to fit the type, unless isSigned is true, in which case the value will
    /// be interpreted as a 64-bit signed integer and sign-extended to fit
    /// the type.
    /// @brief Get a ConstantInt for a specific value.
```

A screenshot of a MacBook Pro displaying the Xcode IDE. The current file is `Constants.h` located at `LLVM/Sources/Libraries/LLVMCore/Header Files`. The code shown is part of the `ConstantInt` class definition.

```
void destroyConstantImpl();

public:
    ConstantInt(const ConstantInt &) = delete;

    static ConstantInt *getTrue(LLVMContext &Context);
    static ConstantInt *getFalse(LLVMContext &Context);
    static Constant *getTrue(Type *Ty);
    static Constant *getFalse(Ty);

    static ConstantInt *getMax();
    static ConstantInt *getMax();

    /// If Ty is a vector type, return a constant with a splat of the given
    /// value. Otherwise return a ConstantInt for the given value.
    static Constant *get(Type *Ty, uint64_t V, bool isSigned = false);

    /// Return a ConstantInt with the specified integer value for the specified
    /// type. If the type is wider than 64 bits, the value will be zero-extended
    /// to fit the type, unless isSigned is true, in which case the value will
    /// be interpreted as a 64-bit signed integer and sign-extended to fit
    /// the type.
    /// @brief Get a ConstantInt for a specific value.
```

A context menu is open over the `getMax()` method, showing the following options:

- Jump to Definition
- Show Quick Help
- Edit All in Scope
- Rename...
- Generate Missing Function Definitions

The `Generate Missing Function Definitions` option is highlighted with a blue rectangle.

```
> LLVM > Sources > Libraries > LLVMCore > Source Files > Constants.cpp > ConstantInt::getMax(llvm::Type *Ty)

bool ConstantInt::isValueValidForType(Type *Ty, int64_t Val) {
    unsigned NumBits = Ty->getIntegerBitWidth();
    if (Ty->isIntegerTy(1))
        return Val == 0 || Val == 1 || Val == -1;
    if (NumBits >= 64)
        return true; // always true, has to fit in largest type
    int64_t Min = -(1ll << (NumBits-1));
    int64_t Max = (1ll << (NumBits-1)) - 1;
    return (Val >= Min && Val <= Max);
}

llvm::ConstantInt *ConstantInt::getMax(llvm::Type *Ty) {
    statements;
}

llvm::ConstantInt *ConstantInt::getMax(llvm::LLVMContext &Context) {
    statements;
}

bool ConstantFP::isValueValidForType(Type *Ty, const APFloat& Val) {
    // convert modifies in place, so make a copy.
    APFloat Val2 = APFloat(Val);
    bool IsOne = Val2.isOne();
    if (!IsOne) {
        APFloat Min = APFloat::getMin();
        APFloat Max = APFloat::getMax();
        if (Val2 < Min || Val2 > Max)
            return false;
    }
    return true;
}
```

MacBook Pro

LLVM > Sources > Libraries > LLVMCore > Source Files > Constants.cpp > ConstantInt::getMax(llvm::Type *Ty)

```
bool ConstantInt::isValueValidForType(Type *Ty, int64_t Val) {
    unsigned NumBits = Ty->getIntegerBitWidth();
    if (Ty->isIntegerTy(1))
        return Val == 0 || Val == 1 || Val == -1;
    if (NumBits >= 64)
        return true; // always true, has to fit in largest type
    int64_t Min = -(1ll << (NumBits-1));
    int64_t Max = (1ll << (NumBits-1)) - 1;
    return (Val >= Min && Val <= Max);
}

llvm::ConstantInt *ConstantInt::getMax(llvm::Type *Ty) {
    statements;
}

llvm::ConstantInt *ConstantInt::getMax(llvm::LLVMContext &Context) {
    statements;
}

bool ConstantFP::isValueValidForType(Type *Ty, const APFloat& Val) {
    // convert modifies in place, so make a copy.
    APFloat Val2 = APFloat(Val);
    bool IsNaN =
```

MacBook Pro

LLVM > Sources > Libraries > LLVMCore > Source Files > Constants.cpp > ConstantInt::getMax(llvm::Type *Ty)

```
bool ConstantInt::isValueValidForType(Type *Ty, int64_t Val) {
    unsigned NumBits = Ty->getIntegerBitWidth();
    if (Ty->isIntegerTy(1))
        return Val == 0 || Val == 1 || Val == -1;
    if (NumBits >= 64)
        return true; // always true, has to fit in largest type
    int64_t Min = -(1ll << (NumBits-1));
    int64_t Max = (1ll << (NumBits-1)) - 1;
    return (Val >= Min && Val <= Max);
}

llvm::ConstantInt *ConstantInt::getMax(llvm::Type *Ty) {
    statements;
}

llvm::ConstantInt *ConstantInt::getMax(llvm::LLVMContext &Context) {
    statements;
}

bool ConstantFP::isValueValidForType(Type *Ty, const APFloat& Val) {
    // convert modifies in place, so make a copy.
    APFloat Val2 = APFloat(Val);
    bool IsNaN =
```

MacBook Pro

```
bool ConstantInt::isValueValidForType(Type *Ty, int64_t Val) {
    unsigned NumBits = Ty->getIntegerBitWidth();
    if (Ty->isIntegerTy(1))
        return Val == 0 || Val == 1 || Val == -1;
    if (NumBits >= 64)
        return true; // always true, has to fit in largest type
    int64_t Min = -(1ll << (NumBits-1));
    int64_t Max = (1ll << (NumBits-1)) - 1;
    return (Val >= Min && Val <= Max);
}

llvm::ConstantInt *ConstantInt::getMax(llvm::Type *Ty) {
    statements;
}

llvm::ConstantInt *ConstantInt::getMax(llvm::LLVMContext &Context) {
    statements;
}

bool ConstantFP::isValueValidForType(Type *Ty, const APFloat& Val) {
    // convert modifies in place, so make a copy.
    APFloat Val2 = APFloat(Val);
    bool IsNaN =
```

MacBook Pro

```
APInt llvm::APIntOps::GreatestCommonDivisor(APInt A, APInt B) {
    // Fast-path a common case.
    if (A == B) return A;

    // Corner cases: if either operand is zero, the other is the gcd.
    if (!A) return B;
    if (!B) return A;

    // Count common powers of 2 and remove all other powers of 2.
    unsigned int Pow2;
    {
        unsigned int Pow2_A = A.countTrailingZeros();
        unsigned int Pow2_B = B.countTrailingZeros();
        if (Pow2_A > Pow2_B) {
            A.lshrInPlace(Pow2_A - Pow2_B);
            Pow2 = Pow2_B;
        } else if (Pow2_B > Pow2_A) {
            B.lshrInPlace(Pow2_B - Pow2_A);
            Pow2 = Pow2_A;
        } else {
            Pow2 = Pow2_A;
        }
    }
}
```


MacBook Pro

```
APInt llvm::APIntOps::GreatestCommonDivisor(APInt A, APInt B) {
    // Fast-path a common case.
    if (A == B) return A;

    // Corner cases: if either operand is zero, the other is the gcd.
    if (!A) return B;
    if (!B) return A;

    // Count common powers of 2 and remove all other powers of 2.
    unsigned int Pow2;
{
    unsigned int Pow2_A = A.countTrailingZeros();
    unsigned int Pow2_B = B.countTrailingZeros();
    if (Pow2_A > Pow2_B) {
        A.lshrInPlace(Pow2_A - Pow2_B);
        Pow2 = Pow2_B;
    } else if (Pow2_B > Pow2_A) {
        B.lshrInPlace(Pow2_B - Pow2_A);
        Pow2 = Pow2_A;
    } else {
        Pow2 = Pow2_A;
    }
}
```

MacBook Pro

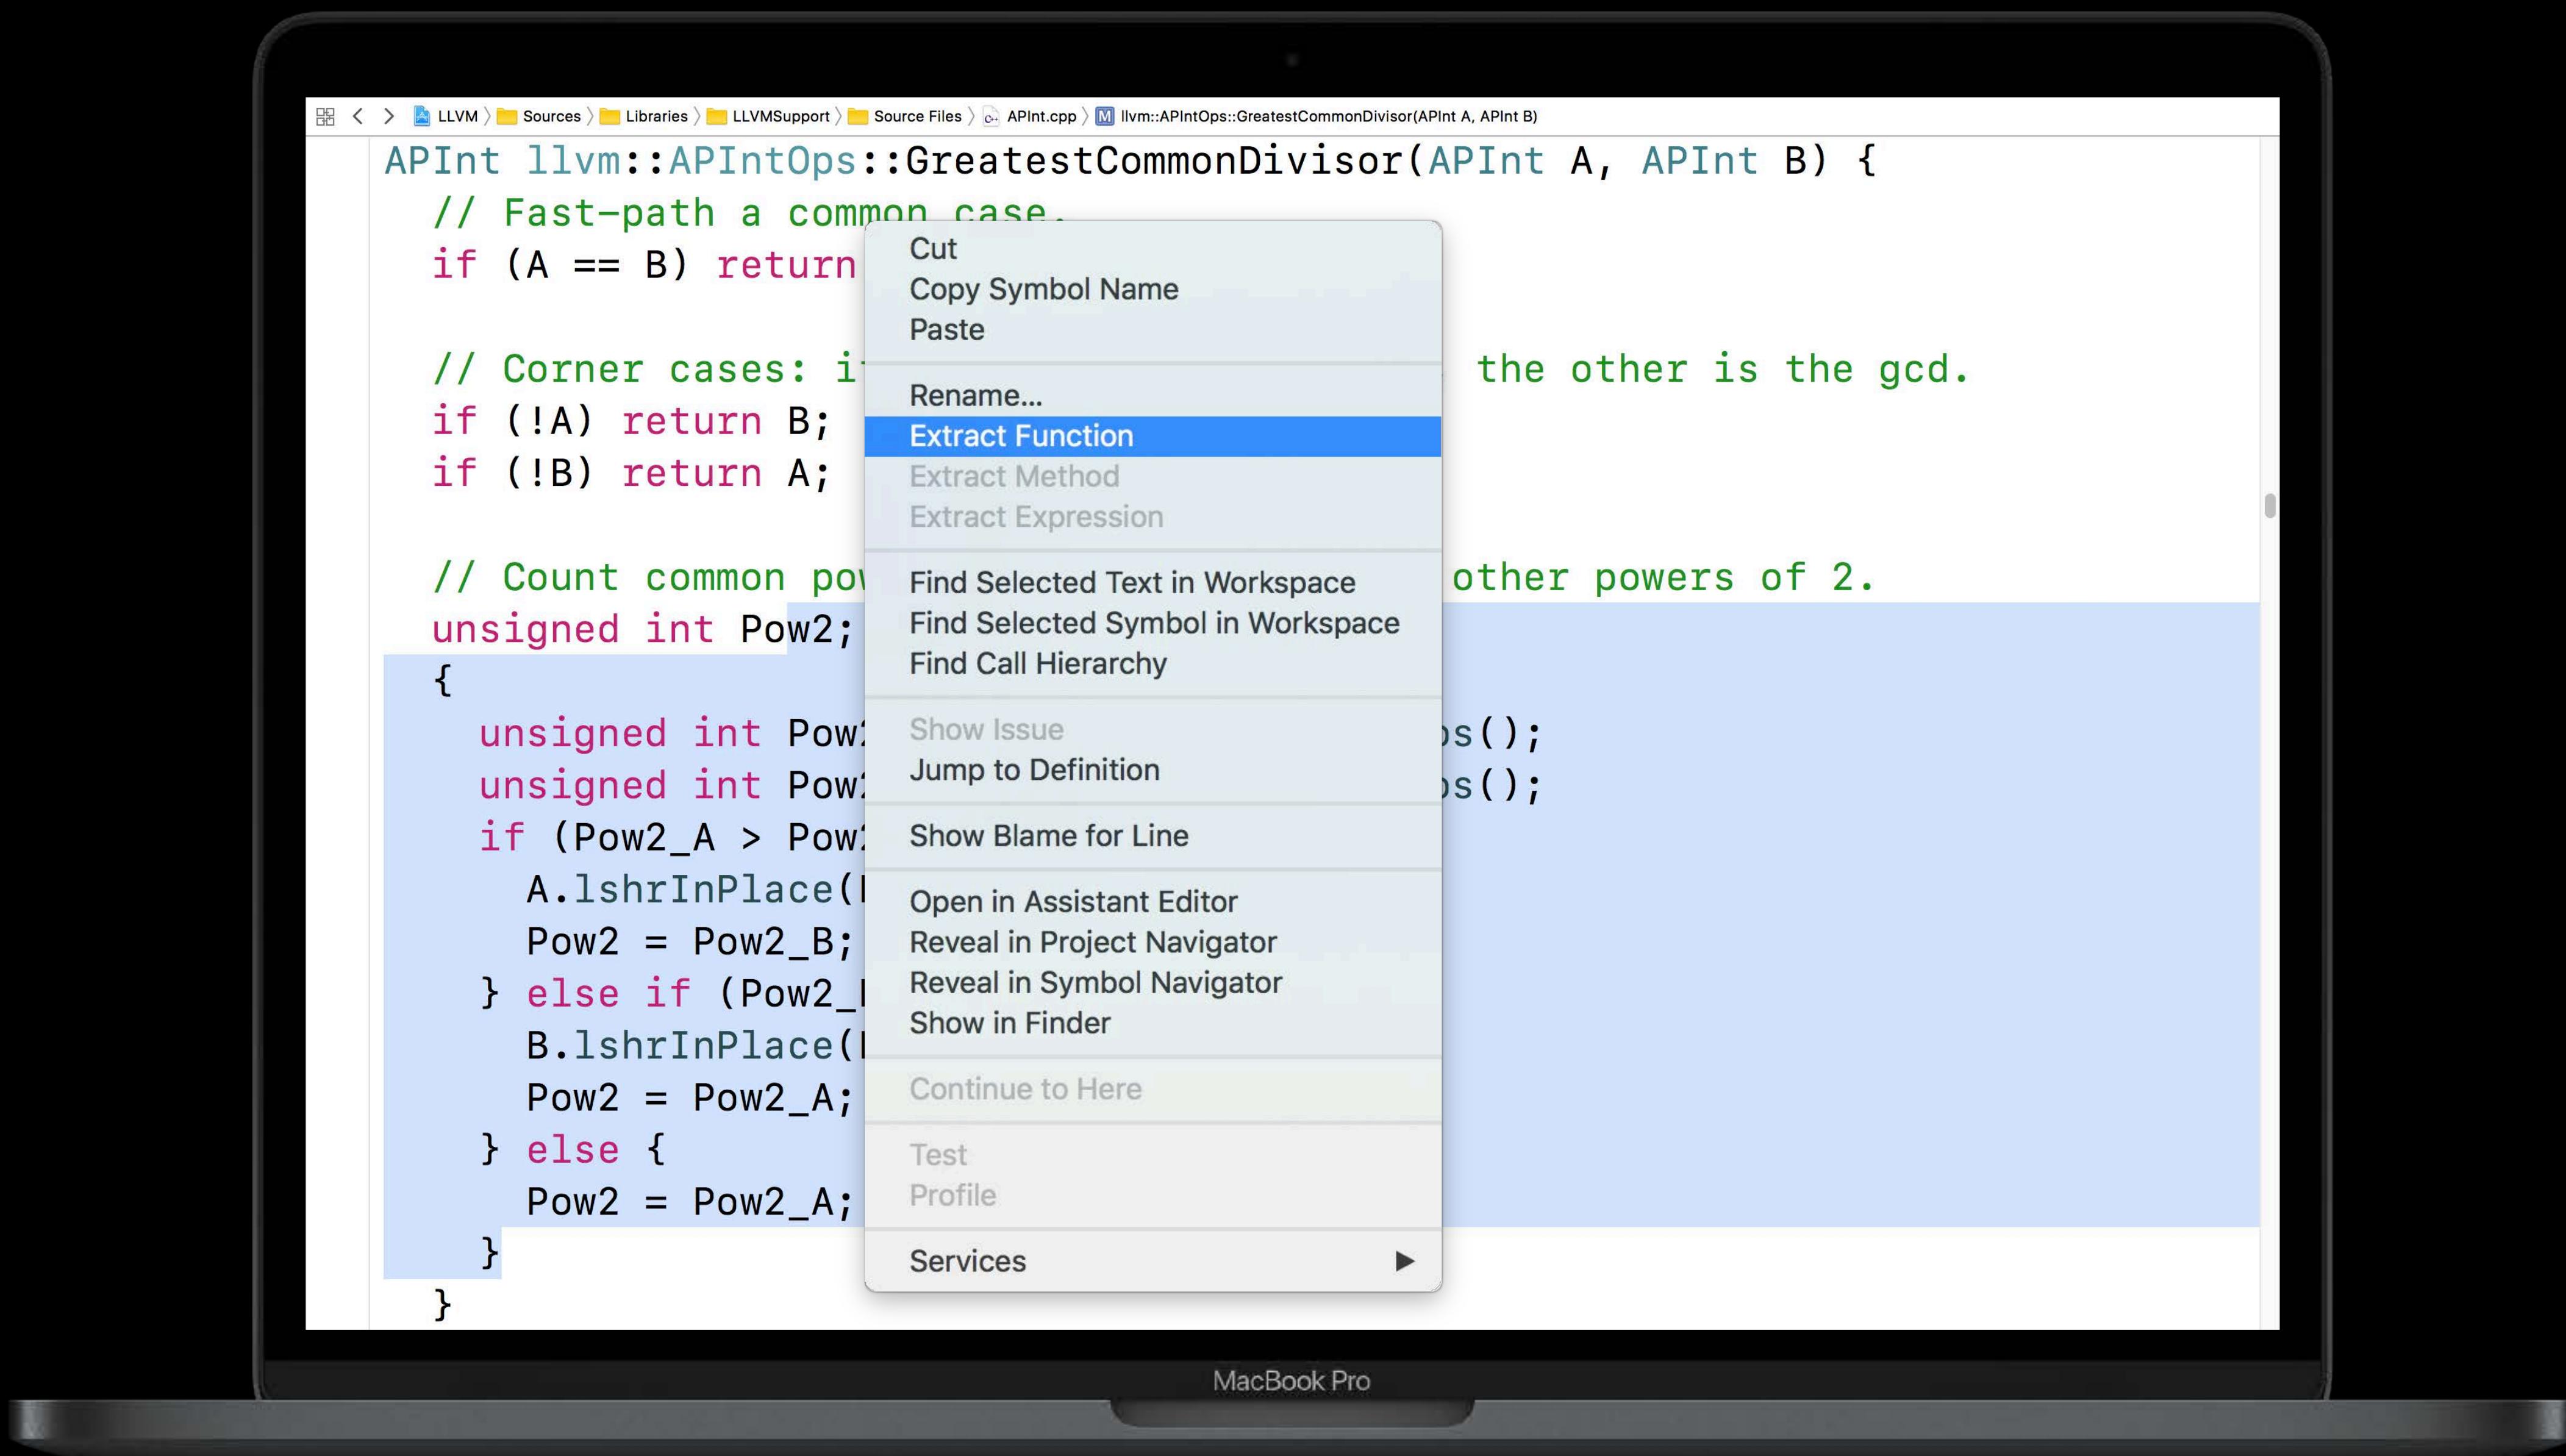

```
if (Pow2_A > Pow2_B) {
    A.lshrInPlace(Pow2_A - Pow2_B);
    Pow2 = Pow2_B;
} else if (Pow2_B > Pow2_A) {
    B.lshrInPlace(Pow2_B - Pow2_A);
    Pow2 = Pow2_A;
} else {
    Pow2 = Pow2_A;
}
return Pow2;
}

APInt llvm::APIntOps::GreatestCommonDivisor(APInt A, APInt B) {
    // Fast-path a common case.
    if (A == B) return A;

    // Corner cases: if either operand is zero, the other is the gcd.
    if (!A) return B;
    if (!B) return A;

    // Count common powers of 2 and remove all other powers of 2.
    unsigned int Pow2 = countCommonPowersOf2(A, B);
```

MacBook Pro

```
if (Pow2_A > Pow2_B) {
    A.lshrInPlace(Pow2_A - Pow2_B);
    Pow2 = Pow2_B;
} else if (Pow2_B > Pow2_A) {
    B.lshrInPlace(Pow2_B - Pow2_A);
    Pow2 = Pow2_A;
} else {
    Pow2 = Pow2_A;
}
return Pow2;
}

APInt llvm::APIntOps::GreatestCommonDivisor(APInt A, APInt B) {
    // Fast-path a common case.
    if (A == B) return A;

    // Corner cases: if either operand is zero, the other is the gcd.
    if (!A) return B;
    if (!B) return A;

    // Count common powers of 2 and remove all other powers of 2.
    unsigned int Pow2 = countCommonPowersOf2(A, B);
```

MacBook Pro

```
    }
```



```
    unsigned int countCommonPowersOf2(llvm::APInt &A, llvm::APInt &B) {
        unsigned int Pow2;
        {
            unsigned int Pow2_A = A.countTrailingZeros();
            unsigned int Pow2_B = B.countTrailingZeros();
            if (Pow2_A > Pow2_B) {
                A.lshrInPlace(Pow2_A - Pow2_B);
                Pow2 = Pow2_B;
            } else if (Pow2_B > Pow2_A) {
                B.lshrInPlace(Pow2_B - Pow2_A);
                Pow2 = Pow2_A;
            } else {
                Pow2 = Pow2_A;
            }
        }
        return Pow2;
    }

    APInt llvm::APIntOps::GreatestCommonDivisor(APInt A, APInt B) {
        // Fast-path a common case.
        if (A == B) return A;
    }
}
```

MacBook Pro

```
    }
```



```
unsigned int countCommonPowersOf2(llvm::APInt &A, llvm::APInt &B) {
    unsigned int Pow2;
    {
        unsigned int Pow2_A = A.countTrailingZeros();
        unsigned int Pow2_B = B.countTrailingZeros();
        if (Pow2_A > Pow2_B) {
            A.lshrInPlace(Pow2_A - Pow2_B);
            Pow2 = Pow2_B;
        } else if (Pow2_B > Pow2_A) {
            B.lshrInPlace(Pow2_B - Pow2_A);
            Pow2 = Pow2_A;
        } else {
            Pow2 = Pow2_A;
        }
    }
    return Pow2;
}

APInt llvm::APIntOps::GreatestCommonDivisor(APInt A, APInt B) {
    // Fast-path a common case.
    if (A == B) return A;
```

MacBook Pro

```
    }
```



```
unsigned int countCommonPowersOf2(llvm::APInt &A, llvm::APInt &B) {
    unsigned int Pow2;
    {
        unsigned int Pow2_A = A.countTrailingZeros();
        unsigned int Pow2_B = B.countTrailingZeros();
        if (Pow2_A > Pow2_B) {
            A.lshrInPlace(Pow2_A - Pow2_B);
            Pow2 = Pow2_B;
        } else if (Pow2_B > Pow2_A) {
            B.lshrInPlace(Pow2_B - Pow2_A);
            Pow2 = Pow2_A;
        } else {
            Pow2 = Pow2_A;
        }
    }
    return Pow2;
}

APInt llvm::APIntOps::GreatestCommonDivisor(APInt A, APInt B) {
    // Fast-path a common case.
    if (A == B) return A;
```

MacBook Pro

```
}

unsigned int countCommonPowersOf2(llvm::APInt &A, llvm::APInt &B) {
    unsigned int Pow2_A = A.countTrailingZeros();
    unsigned int Pow2_B = B.countTrailingZeros();
    if (Pow2_A > Pow2_B) {
        A.lshrInPlace(Pow2_A - Pow2_B);
        return Pow2_B;
    }
    if (Pow2_B > Pow2_A) {
        B.lshrInPlace(Pow2_B - Pow2_A);
        return Pow2_A;
    }
    return Pow2_A;
}

APInt llvm::APIntOps::GreatestCommonDivisor(APInt A, APInt B) {
    // Fast-path a common case.
    if (A == B) return A;

    // Corner cases: if either operand is zero, the other is the gcd.
    if (!A) return B;
    if (!B) return A;
```

MacBook Pro

```
if (DT) {
    if (OuterL) {
        // OuterL includes all loops for which we can break loop-simplify, so
        // it's sufficient to simplify only it (it'll recursively simplify inner
        // loops too).
        if (NeedToFixLCSSA) {
            // LCSSA must be performed on the outermost affected loop. The unrolled
            // loop's last loop latch is guaranteed to be in the outermost loop
            // after LoopInfo's been updated by markAsRemoved.
            Loop *FixLCSSALoop = OuterL;
            if (!FixLCSSALoop->contains(LI->getLoopFor(Latches.back())))
                while (FixLCSSALoop->getParentLoop() !=
                       LI->getLoopFor(Latches.back()))
                    FixLCSSALoop = FixLCSSALoop->getParentLoop();

            formLCSSARecursively(*FixLCSSALoop, *DT, LI, SE);
        } else if (PreserveLCSSA) {
            assert(OuterL->isLCSSAForm(*DT) &&
                   "Loops should be in LCSSA form after loop-unroll.");
        }

        simplifyLoop(OuterL, DT, LI, SE, AC, PreserveLCSSA);
    } else {
```

```
if (DT) {
    if (OuterL) {
        // OuterL includes all loops for which we can break loop-simplify, so
        // it's sufficient to simplify only it (it'll recursively simplify inner
        // loops too).
        if (NeedToFixLCSSA) {
            // LCSSA must be performed on the outermost affected loop. The unrolled
            // loop's last loop latch is guaranteed to be in the outermost loop
            // after LoopInfo's been updated by markAsRemoved.
            Loop *FixLCSSALoop = OuterL;
            if (!FixLCSSALoop->contains(LI->getLoopFor(Latches.back())))
                while (FixLCSSALoop->getParentLoop() !=  


                       LI->getLoopFor(Latches.back()))
                    FixLCSSALoop = FixLCSSALoop->getParentLoop();

            formLCSSARecursively(*FixLCSSALoop, *DT, LI, SE);
        } else if (PreserveLCSSA) {
            assert(OuterL->isLCSSAForm(*DT) &&
                   "Loops should be in LCSSA form after loop-unroll.");
        }

        simplifyLoop(OuterL, DT, LI, SE, AC, PreserveLCSSA);
    } else {
```

MacBook Pro

```
if (DT) {
    if (OuterL) {
        // OuterL includes all loops for which we can break loop-simplify, so
        // it's sufficient to simplify only it (it'll recursively simplify inner
        // loops too).
        if (NeedToFixLCSSA) {
            // LCSSA must be performed on the outermost affected loop. The unrolled
            // loop's last loop latch is guaranteed to be in the outermost loop
            // after LoopInfo's been updated by markAsRemoved.
            Loop *FixLCSSALoop = OuterL ·
            if (!FixLCSSALoop->contains(*OuterL))
                while (FixLCSSALoop->getLoopFor(*OuterL) != OuterL)
                    LI->getLoopFor(*OuterL);
            FixLCSSALoop = FixLCSSALoop->getNextLoop();
            formLCSSARecursively(*FixLCSSALoop, *DT, LI, SE);
        } else if (PreserveLCSSA) {
            assert(OuterL->isLCSSAForm(*DT) &&
                   "Loops should be in LCSSA form after loop-unroll.");
        }
        simplifyLoop(OuterL, DT, LI, SE, AC, PreserveLCSSA);
    } else {
        or(Latches.back()))
    }
}
```

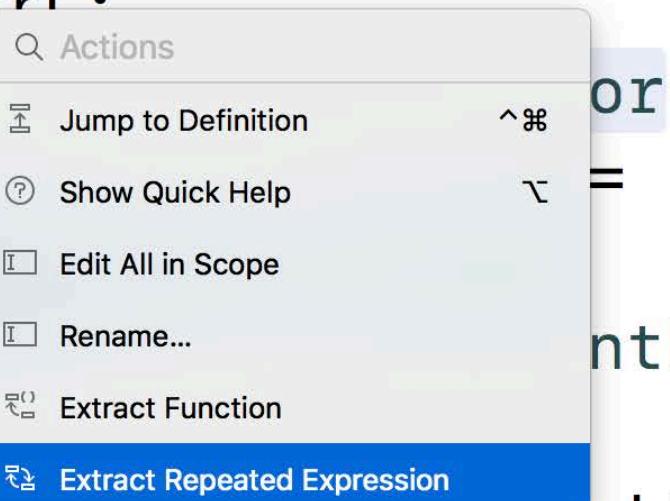

MacBook Pro

```
if (DT) {
    if (OuterL) {
        // OuterL includes all loops for which we can break loop-simplify, so
        // it's sufficient to simplify only it (it'll recursively simplify inner
        // loops too).
        if (NeedToFixLCSSA) {
            // LCSSA must be performed on the outermost affected loop. The unrolled
            // loop's last loop latch is guaranteed to be in the outermost loop
            // after LoopInfo's been updated by markAsRemoved.
            Loop *FixLCSSALoop = OuterL;
            llvm::Loop *getLoopFor = LI->getLoopFor(Latches.back());
            if (!FixLCSSALoop->contains(getLoopFor))
                while (FixLCSSALoop->getParentLoop() !=  

                       getLoopFor)
                    FixLCSSALoop = FixLCSSALoop->getParentLoop();

            formLCSSARecursively(*FixLCSSALoop, *DT, LI, SE);
        } else if (PreserveLCSSA) {
            assert(OuterL->isLCSSAForm(*DT) &&
                   "Loops should be in LCSSA form after loop-unroll.");
        }
    }

    simplifyLoop(OuterL, DT, LI, SE, AC, PreserveLCSSA);
}
```

MacBook Pro

```
if (DT) {
    if (OuterL) {
        // OuterL includes all loops for which we can break loop-simplify, so
        // it's sufficient to simplify only it (it'll recursively simplify inner
        // loops too).
        if (NeedToFixLCSSA) {
            // LCSSA must be performed on the outermost affected loop. The unrolled
            // loop's last loop latch is guaranteed to be in the outermost loop
            // after LoopInfo's been updated by markAsRemoved.
            Loop *FixLCSSALoop = OuterL;
            llvm::Loop *LoopLatch = LI->getLoopFor(Latches.back());
            if (!FixLCSSALoop->contains(LoopLatch))
                while (FixLCSSALoop->getParentLoop() !=
                       LoopLatch)
                    FixLCSSALoop = FixLCSSALoop->getParentLoop();

            formLCSSARecursively(*FixLCSSALoop, *DT, LI, SE);
        } else if (PreserveLCSSA) {
            assert(OuterL->isLCSSAForm(*DT) &&
                   "Loops should be in LCSSA form after loop-unroll.");
        }
    }

    simplifyLoop(OuterL, DT, LI, SE, AC, PreserveLCSSA);
}
```

MacBook Pro

```
if (DT) {
    if (OuterL) {
        // OuterL includes all loops for which we can break loop-simplify, so
        // it's sufficient to simplify only it (it'll recursively simplify inner
        // loops too).
        if (NeedToFixLCSSA) {
            // LCSSA must be performed on the outermost affected loop. The unrolled
            // loop's last loop latch is guaranteed to be in the outermost loop
            // after LoopInfo's been updated by markAsRemoved.
            Loop *FixLCSSALoop = OuterL;
            llvm::Loop *LoopLatch = LI->getLoopFor(Latches.back());
            if (!FixLCSSALoop->contains(LoopLatch))
                while (FixLCSSALoop->getParentLoop() !=
                       LoopLatch)
                    FixLCSSALoop = FixLCSSALoop->getParentLoop();

            formLCSSARecursively(*FixLCSSALoop, *DT, LI, SE);
        } else if (PreserveLCSSA) {
            assert(OuterL->isLCSSAForm(*DT) &&
                   "Loops should be in LCSSA form after loop-unroll.");
        }
    }

    simplifyLoop(OuterL, DT, LI, SE, AC, PreserveLCSSA);
}
```

MacBook Pro

LLVM > ArrayRefOps.h > No Selection

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H


#include "llvm/ADT/ArrayRef.h"

namespace llvm {

}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

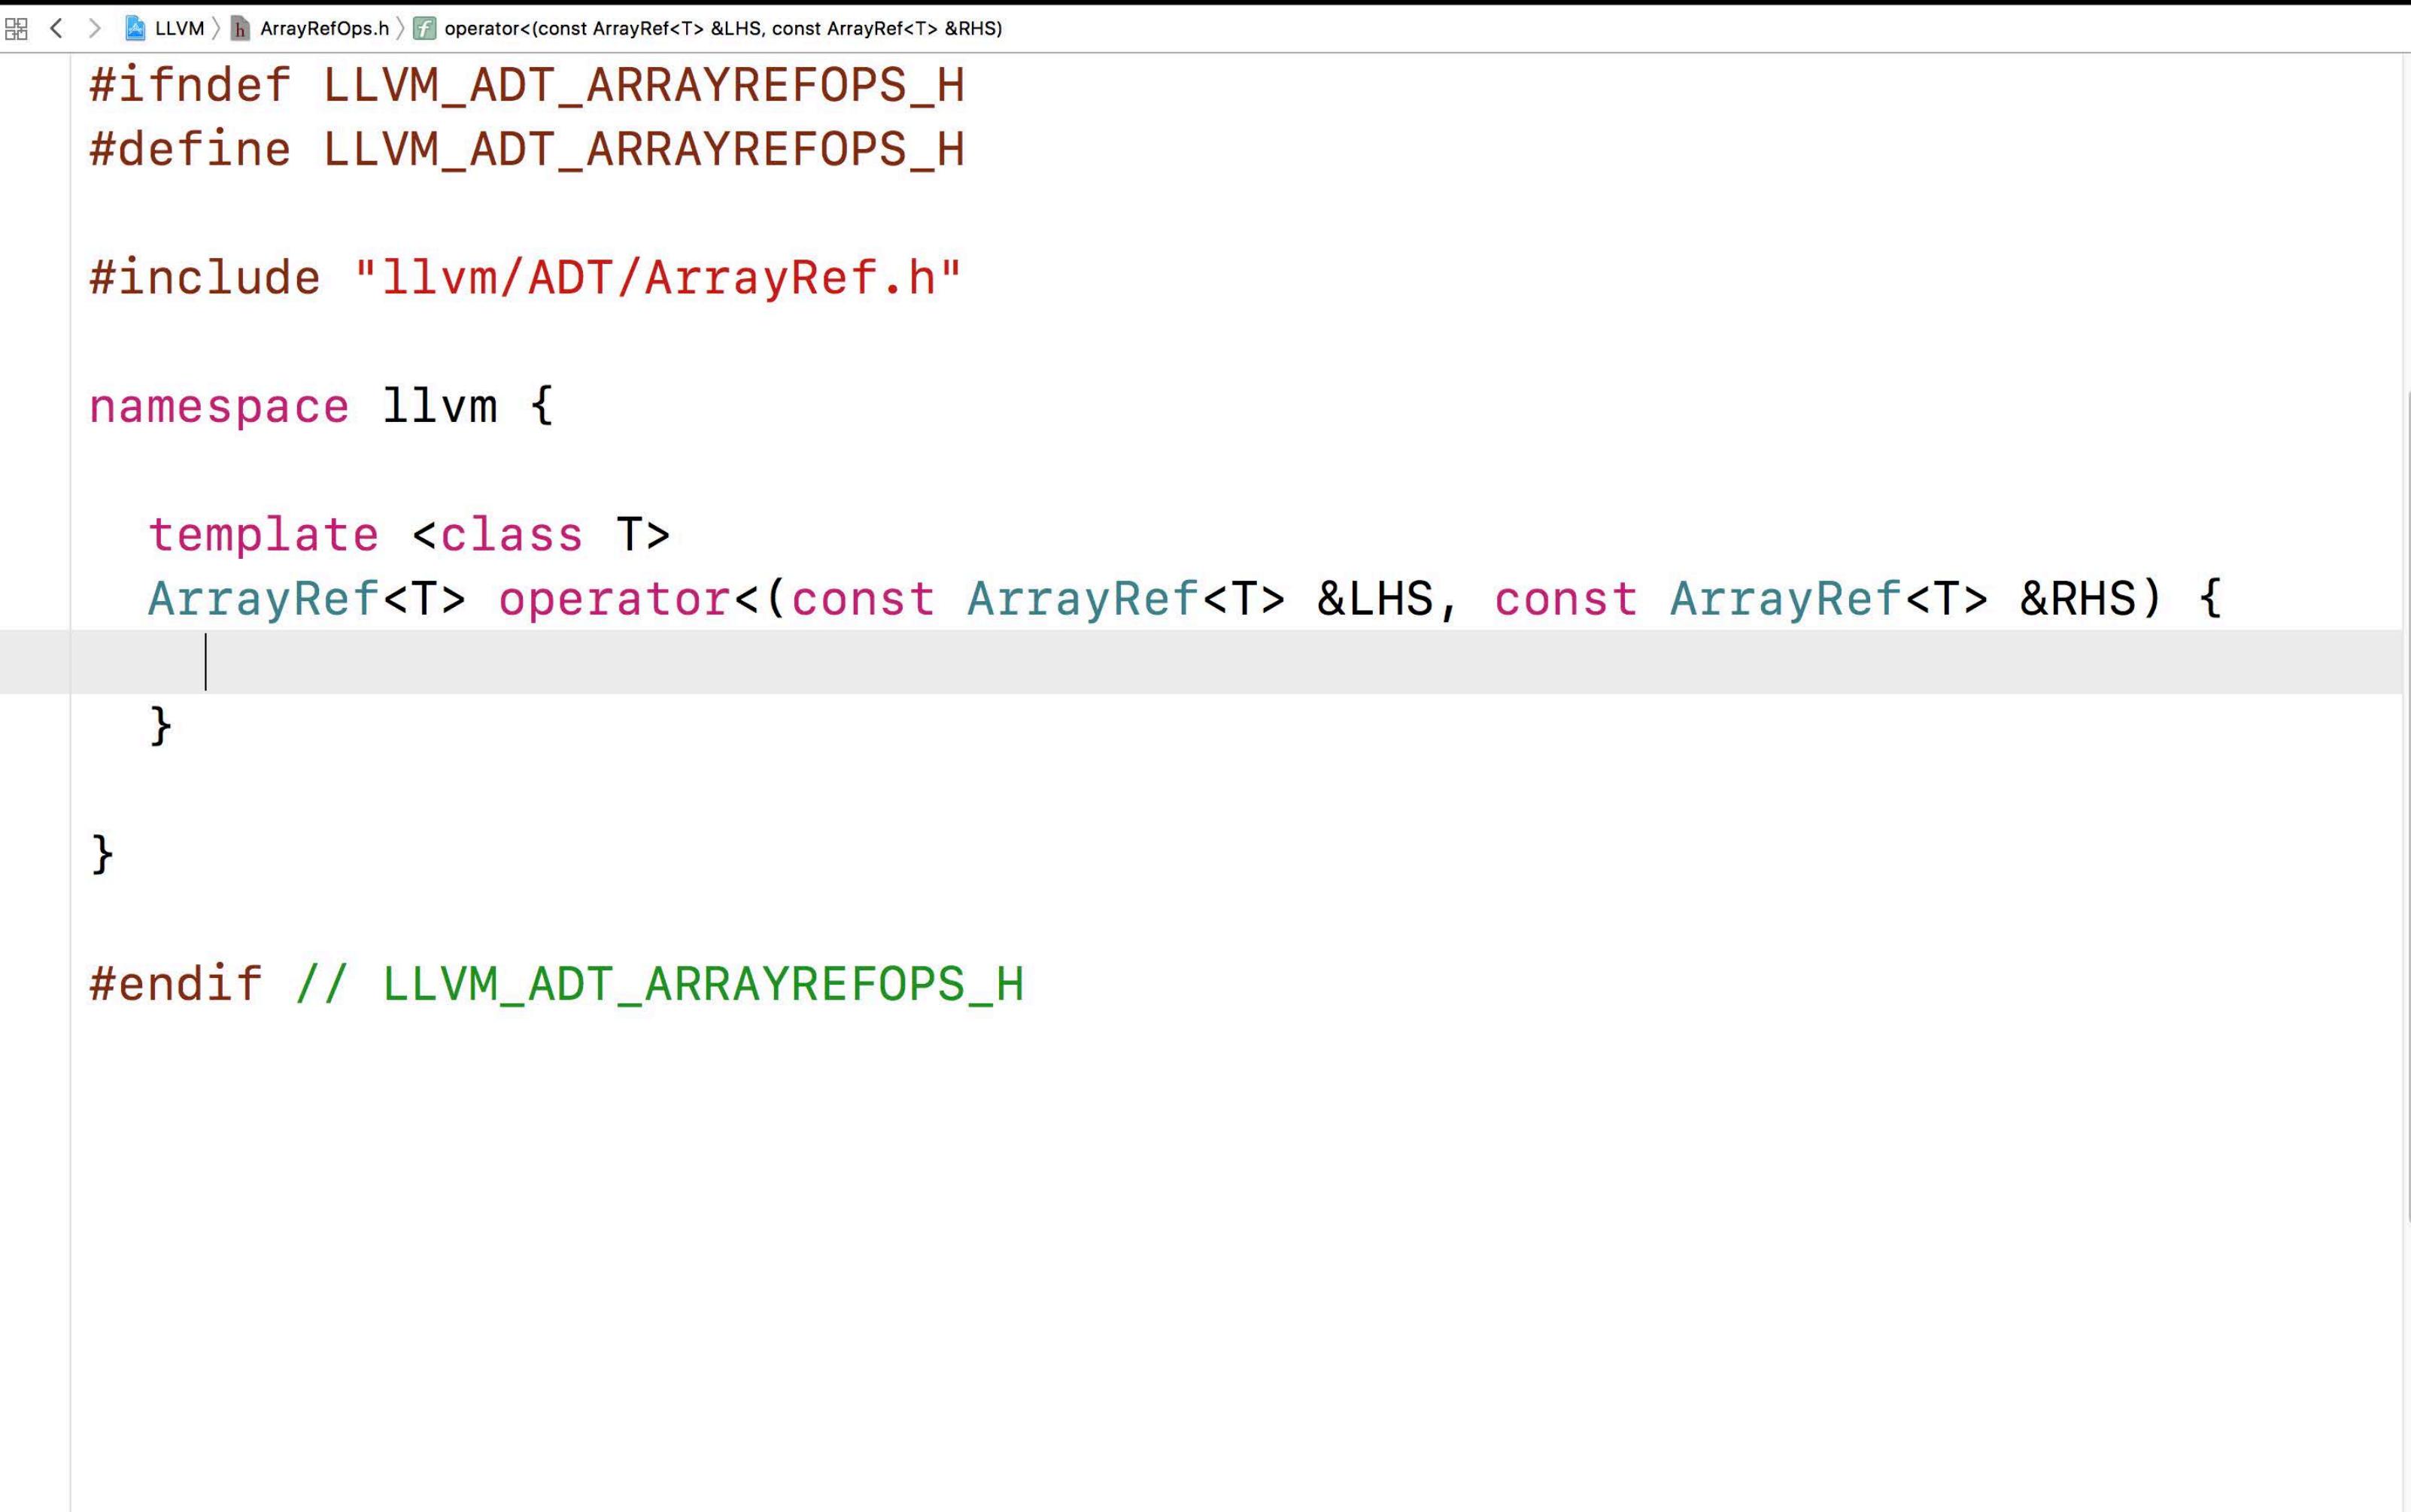

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        |
    }

}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

LLVM > ArrayRefOps.h > operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS)

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"


namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        |
    }

}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

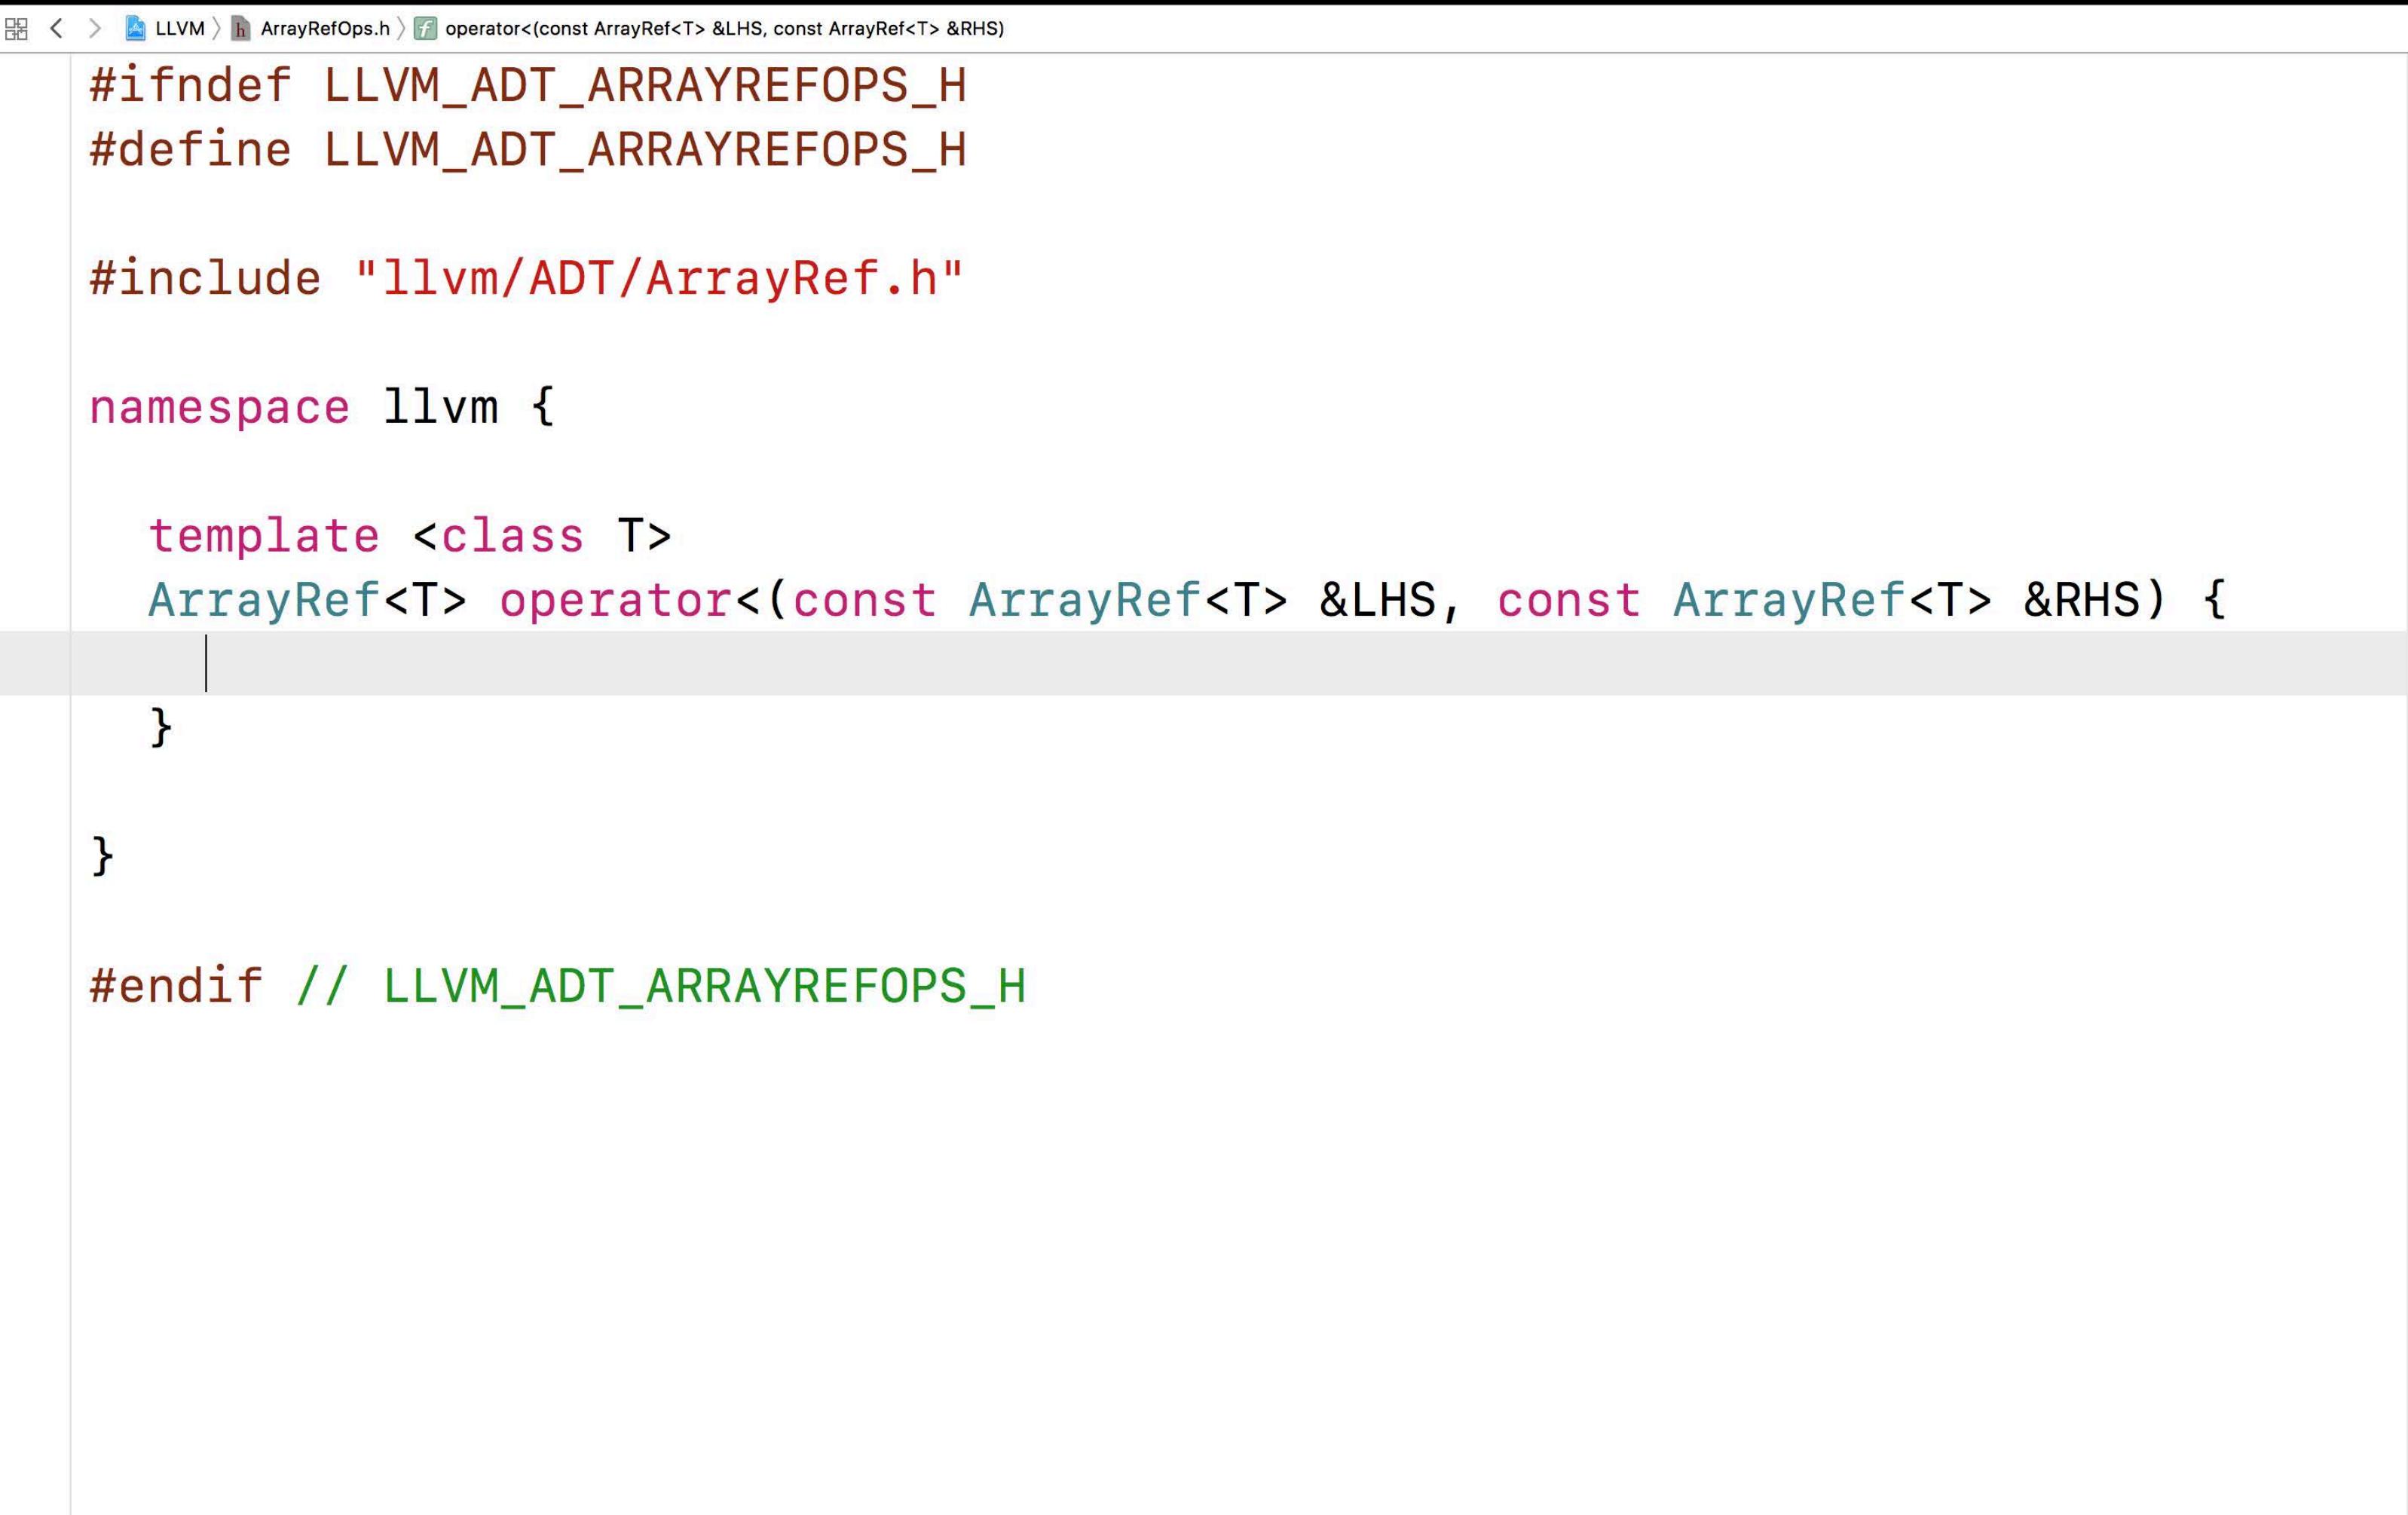

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"


namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        |
    }

}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

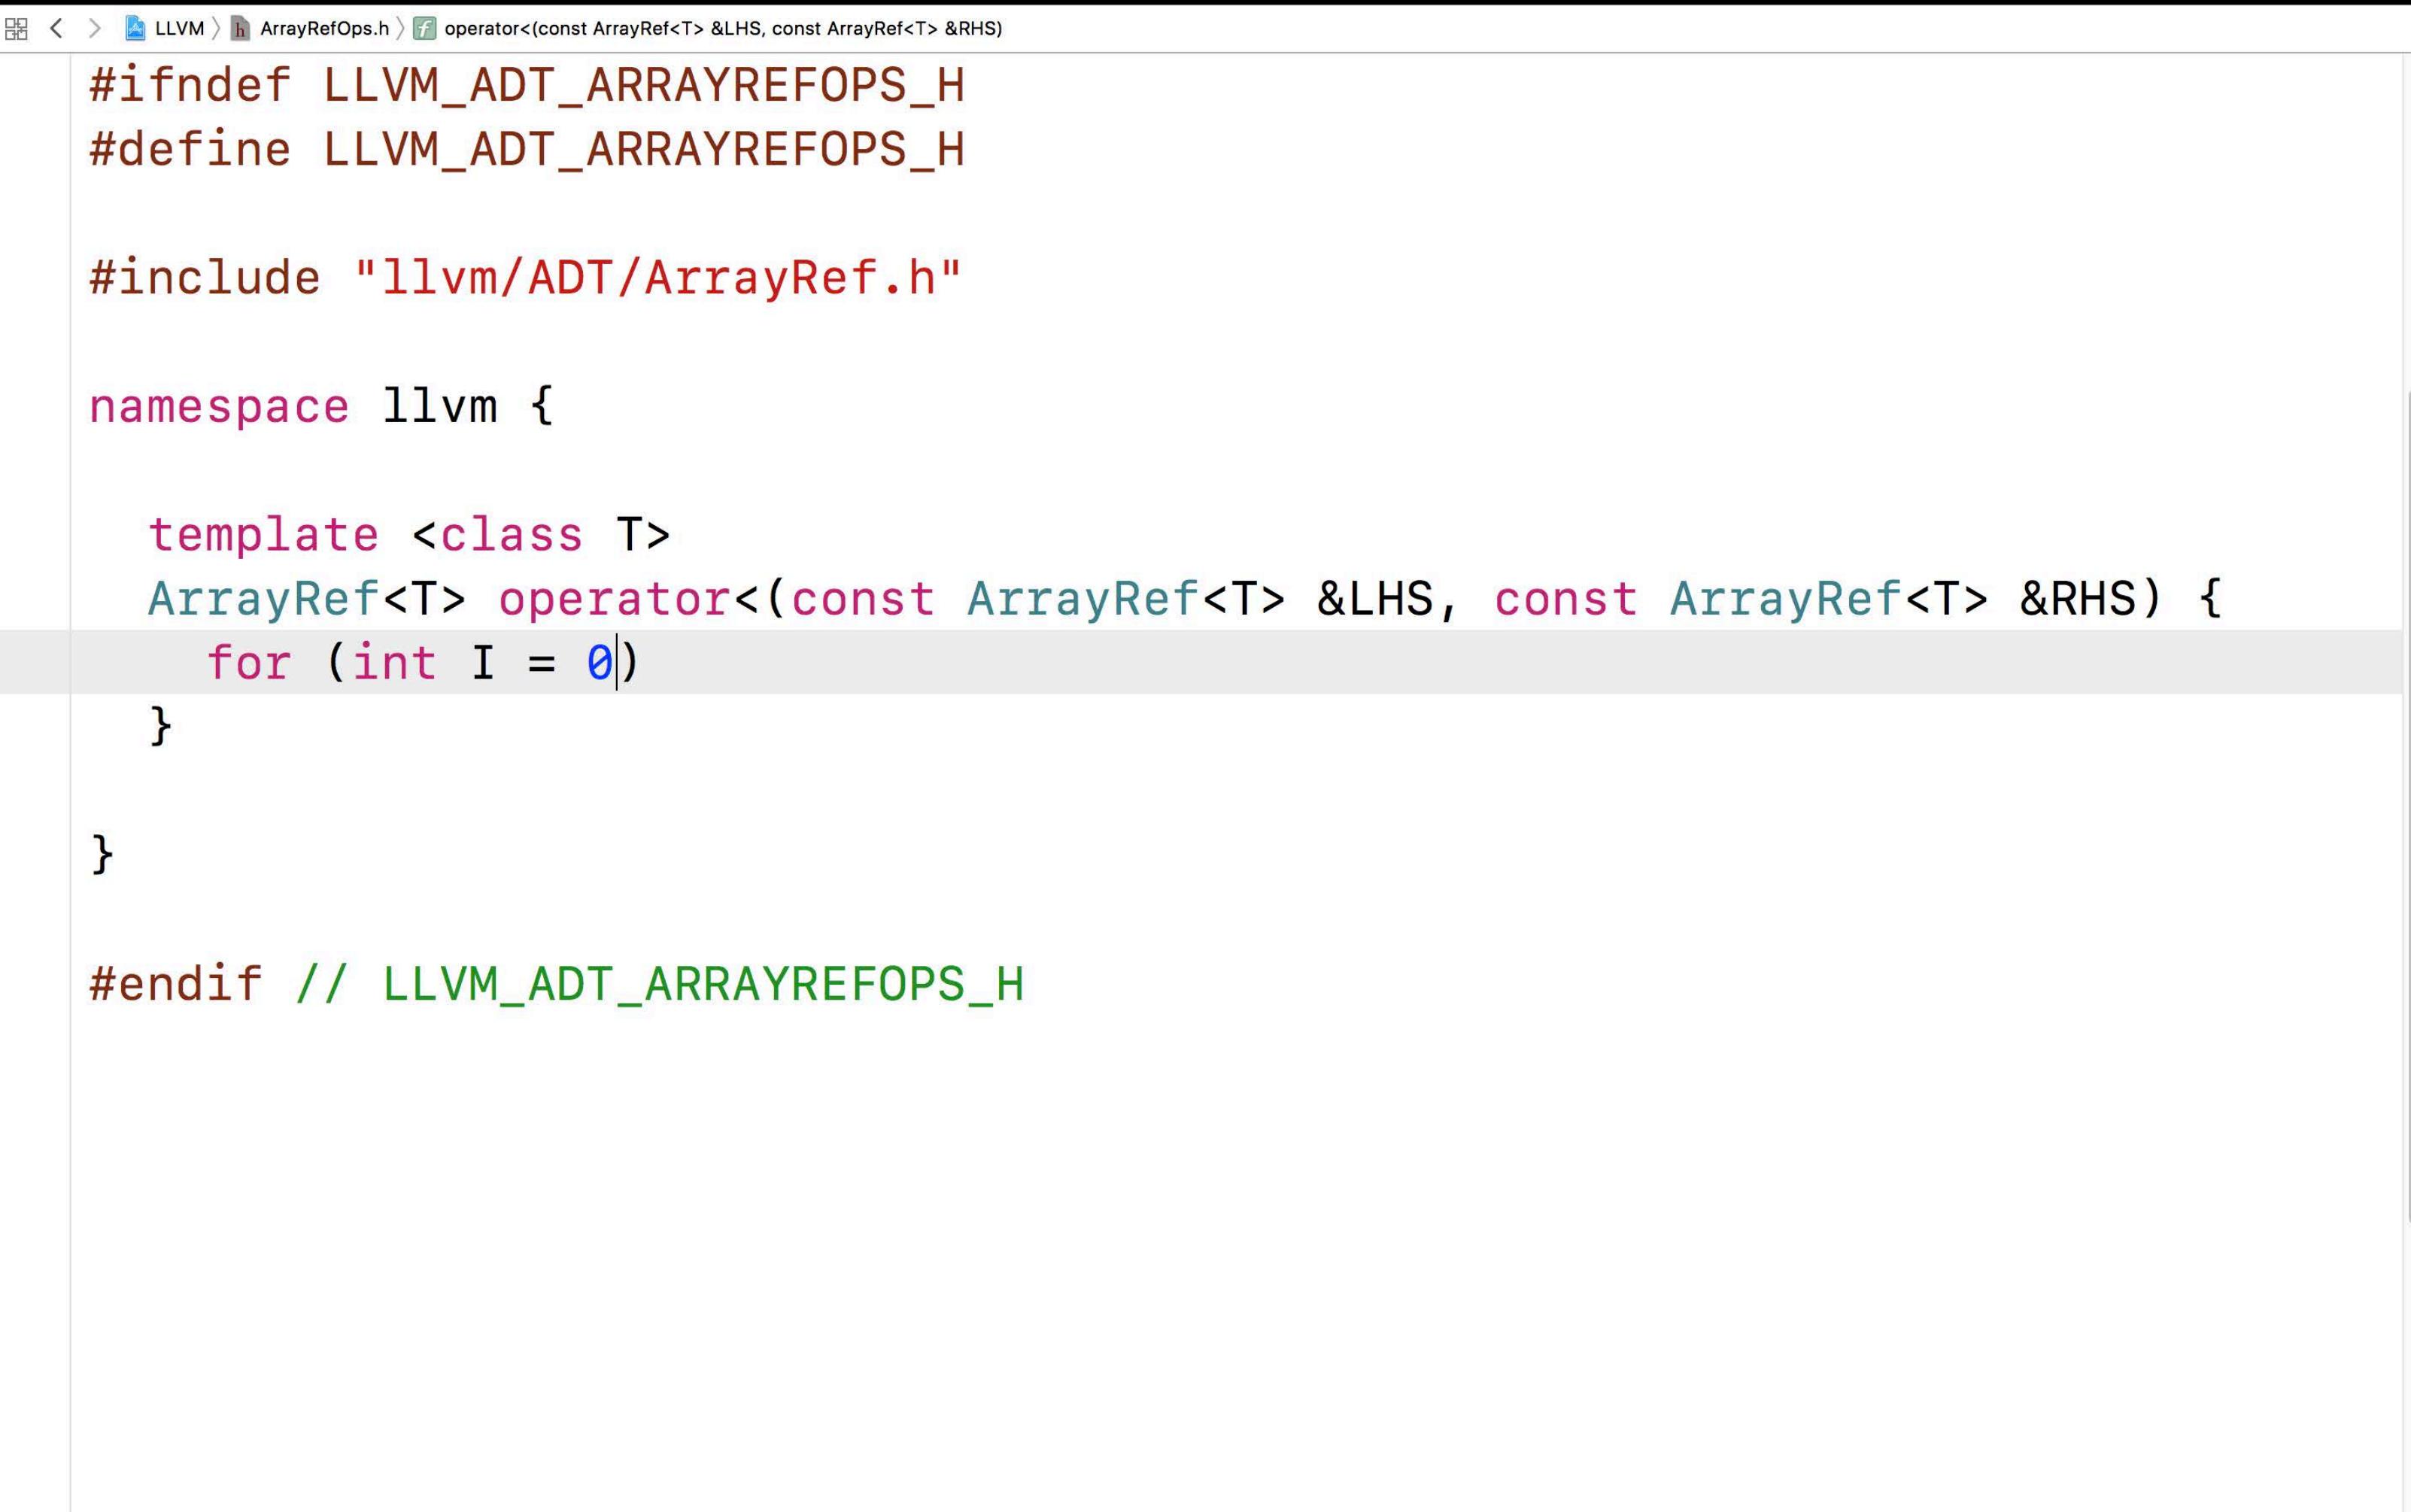

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H


#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0)
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

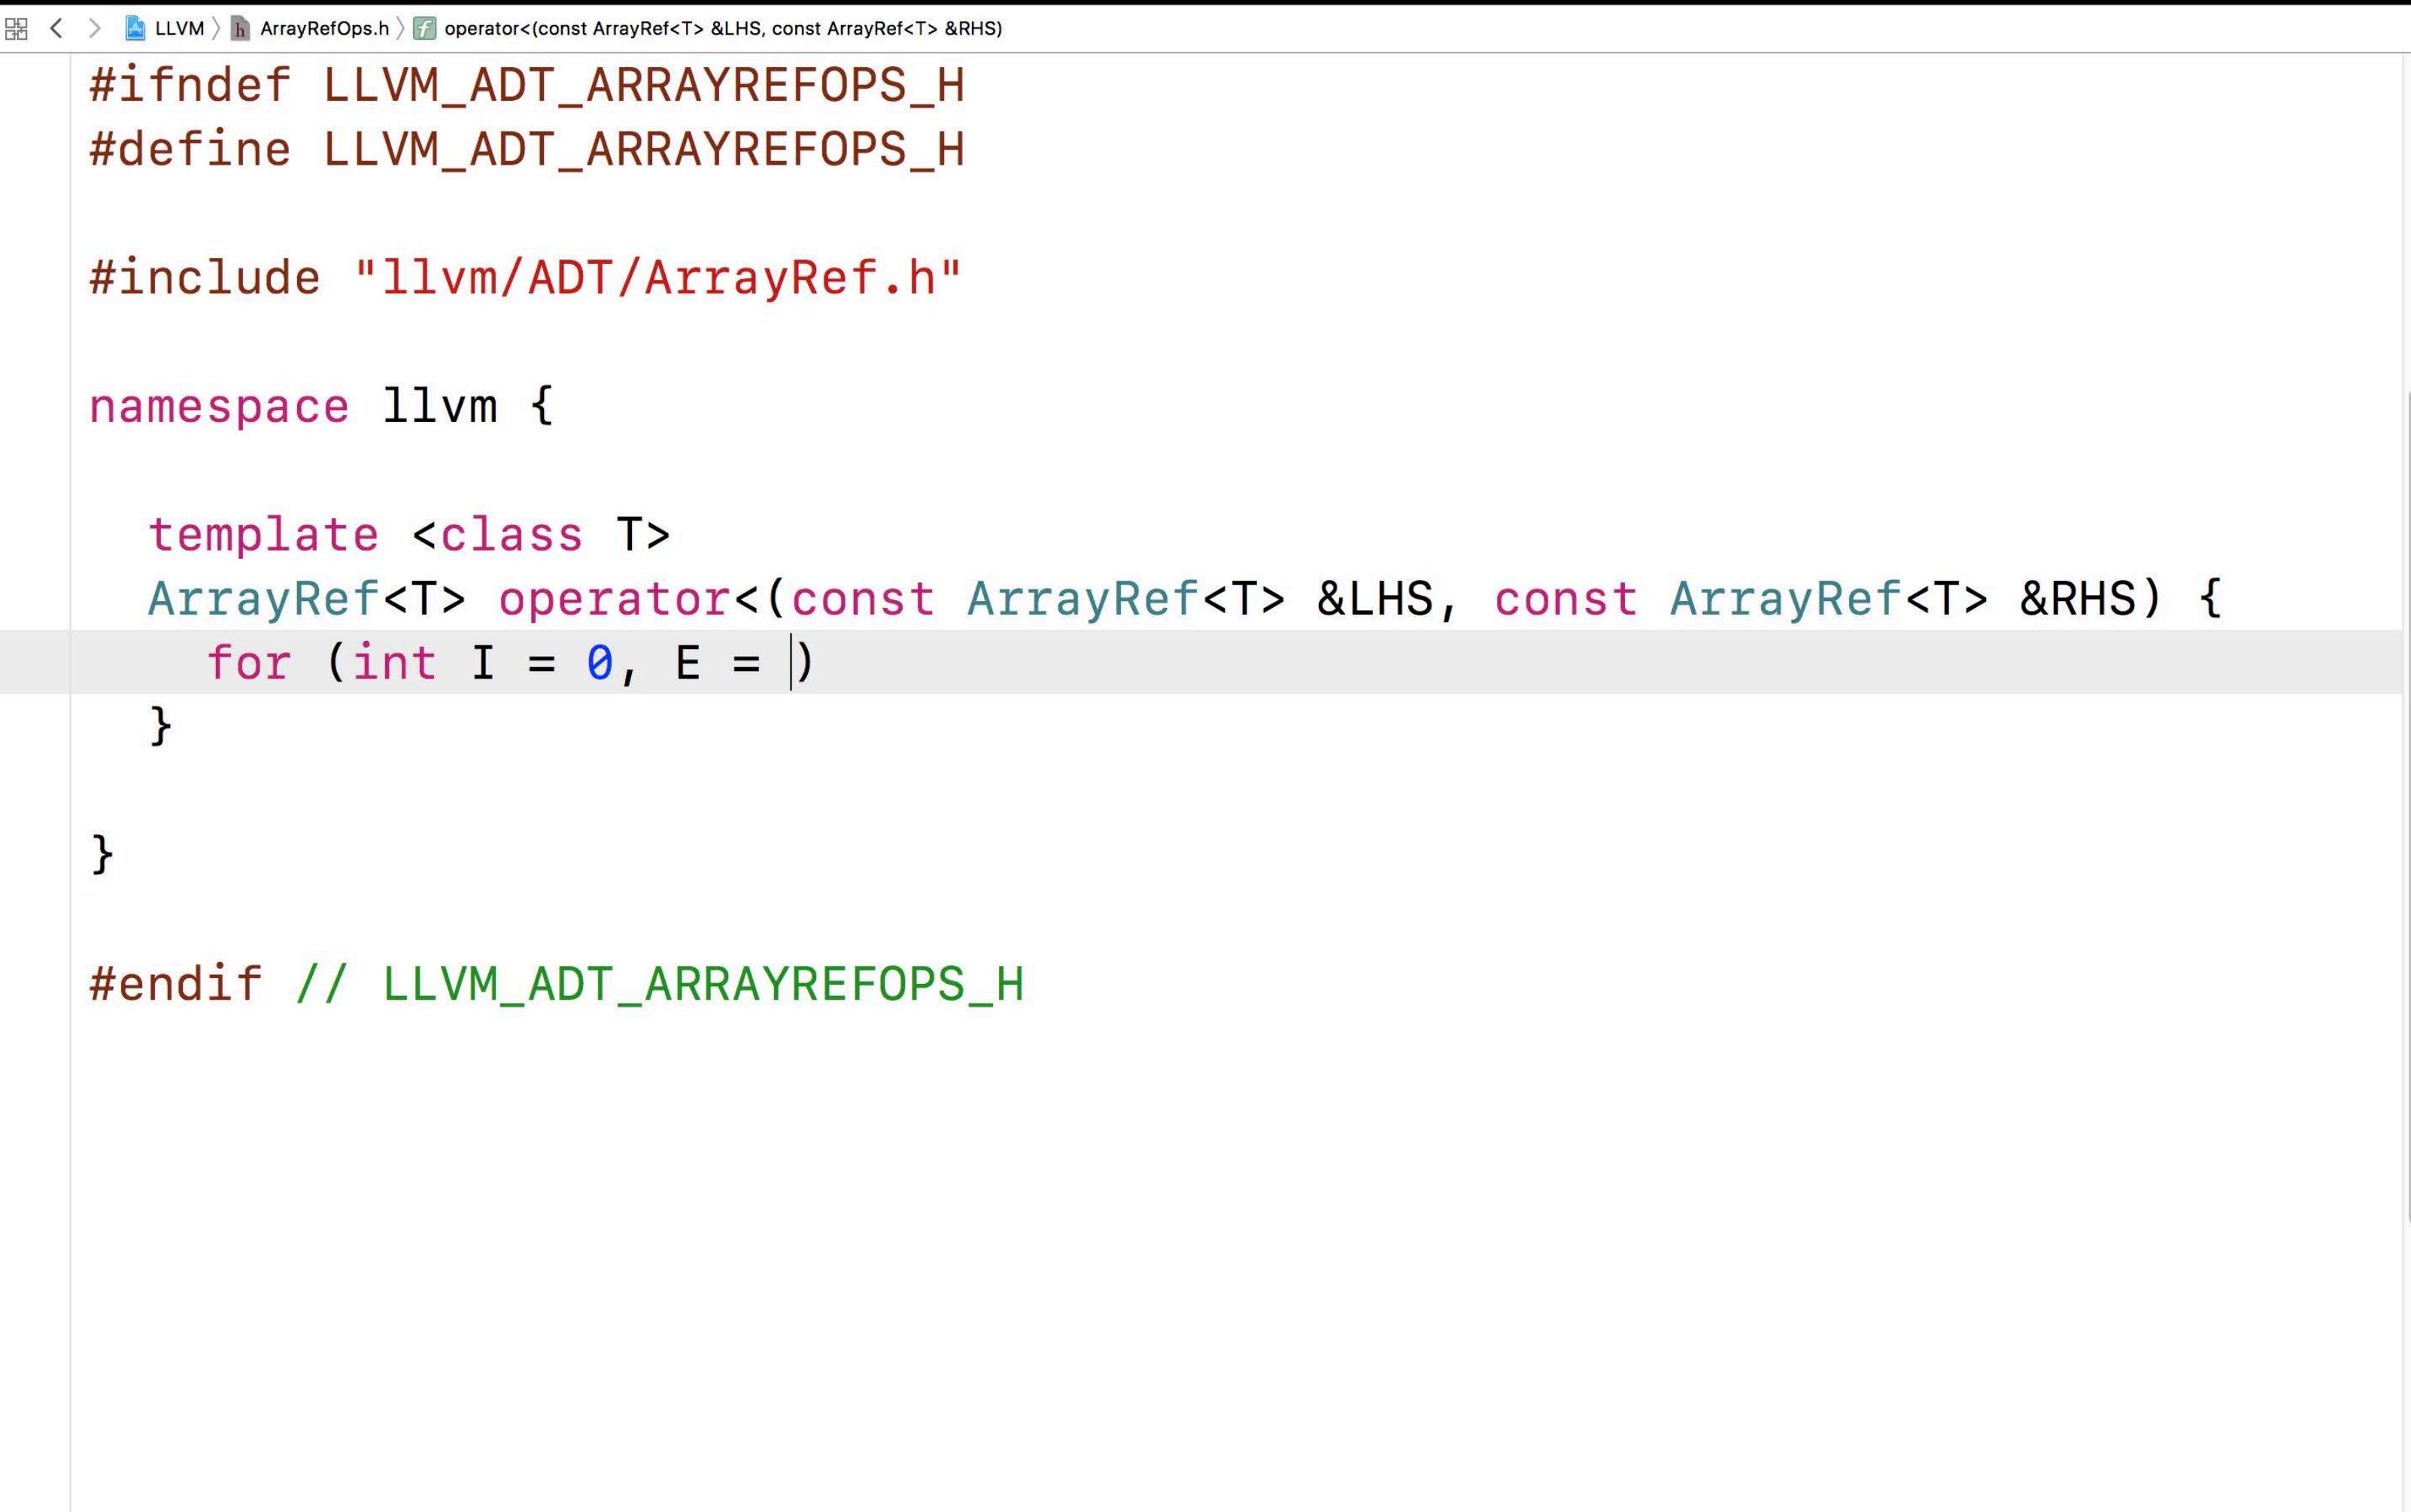

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H


#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = |)
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

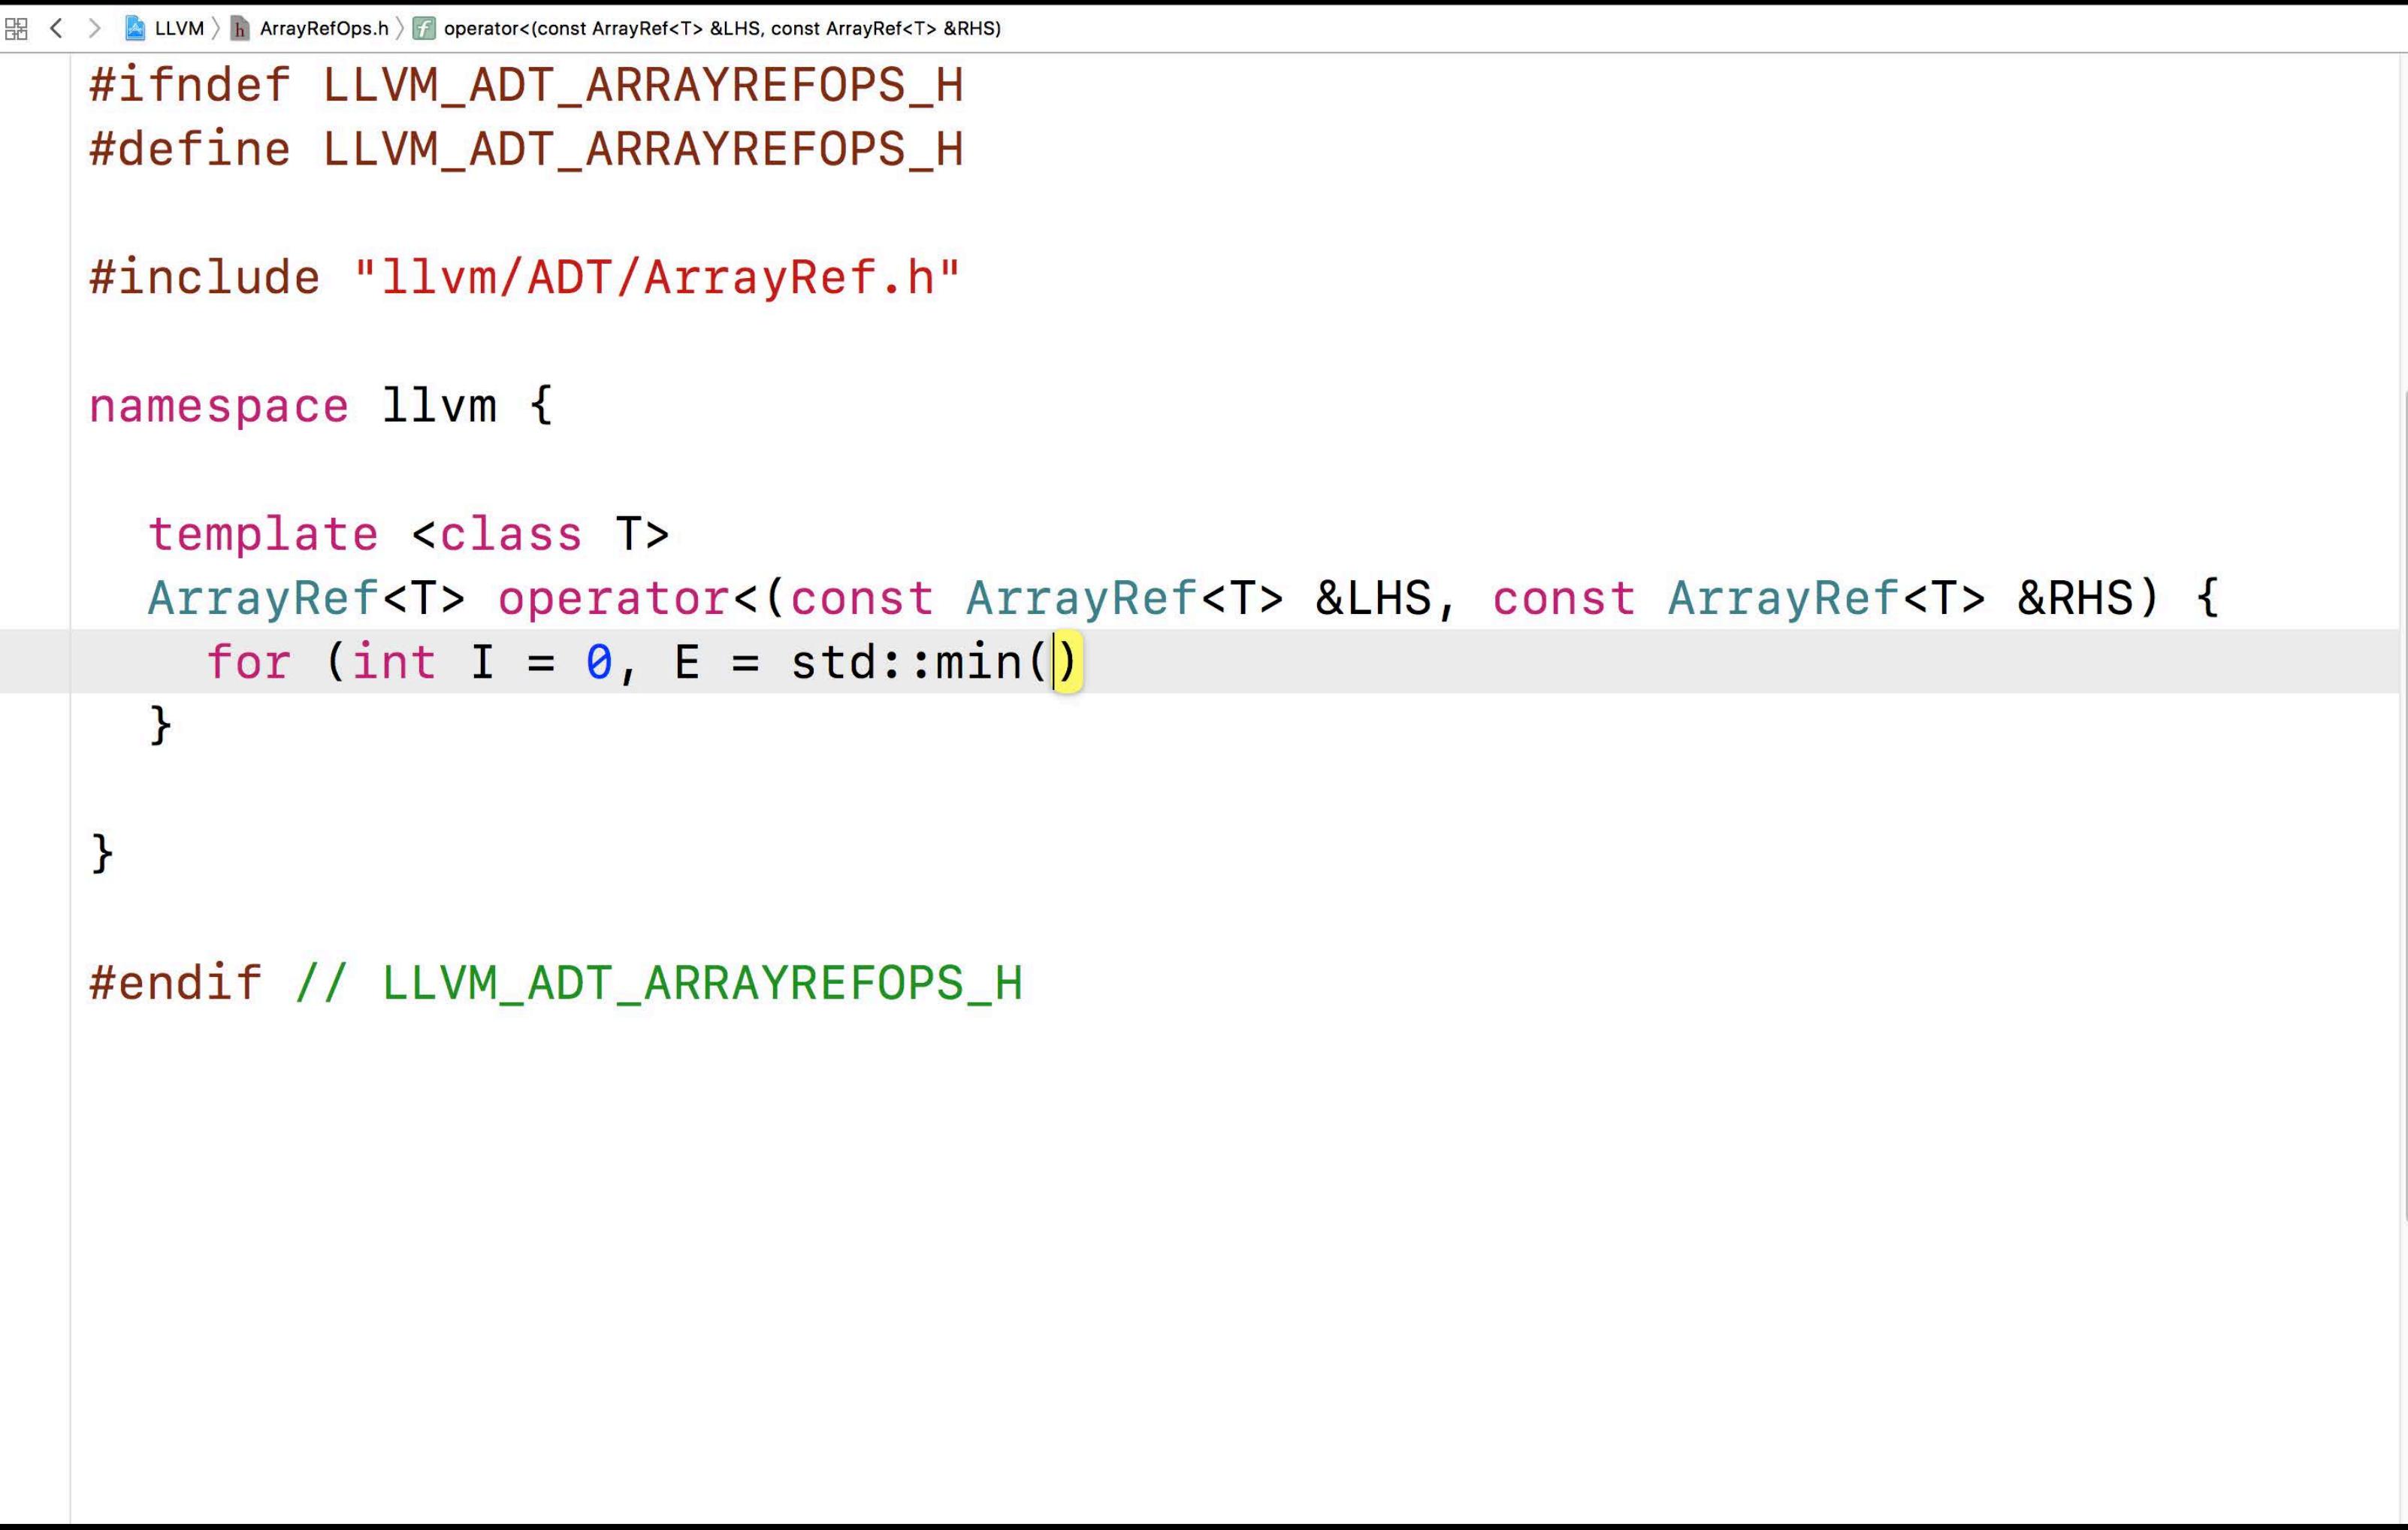

The image shows a dark-themed code editor window titled "LLVM > ArrayRefOps.h". The code is written in C++ and defines a less-than operator for `ArrayRef` objects. The code includes a header guard, an include directive, and a namespace declaration. It then defines a template function for the less-than operator, which iterates from index 0 to the minimum of the two array lengths. The code ends with an `#endif` directive.

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(); I < E; ++I)
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {


    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS))
```

```
}
```

```
}
```

```
#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

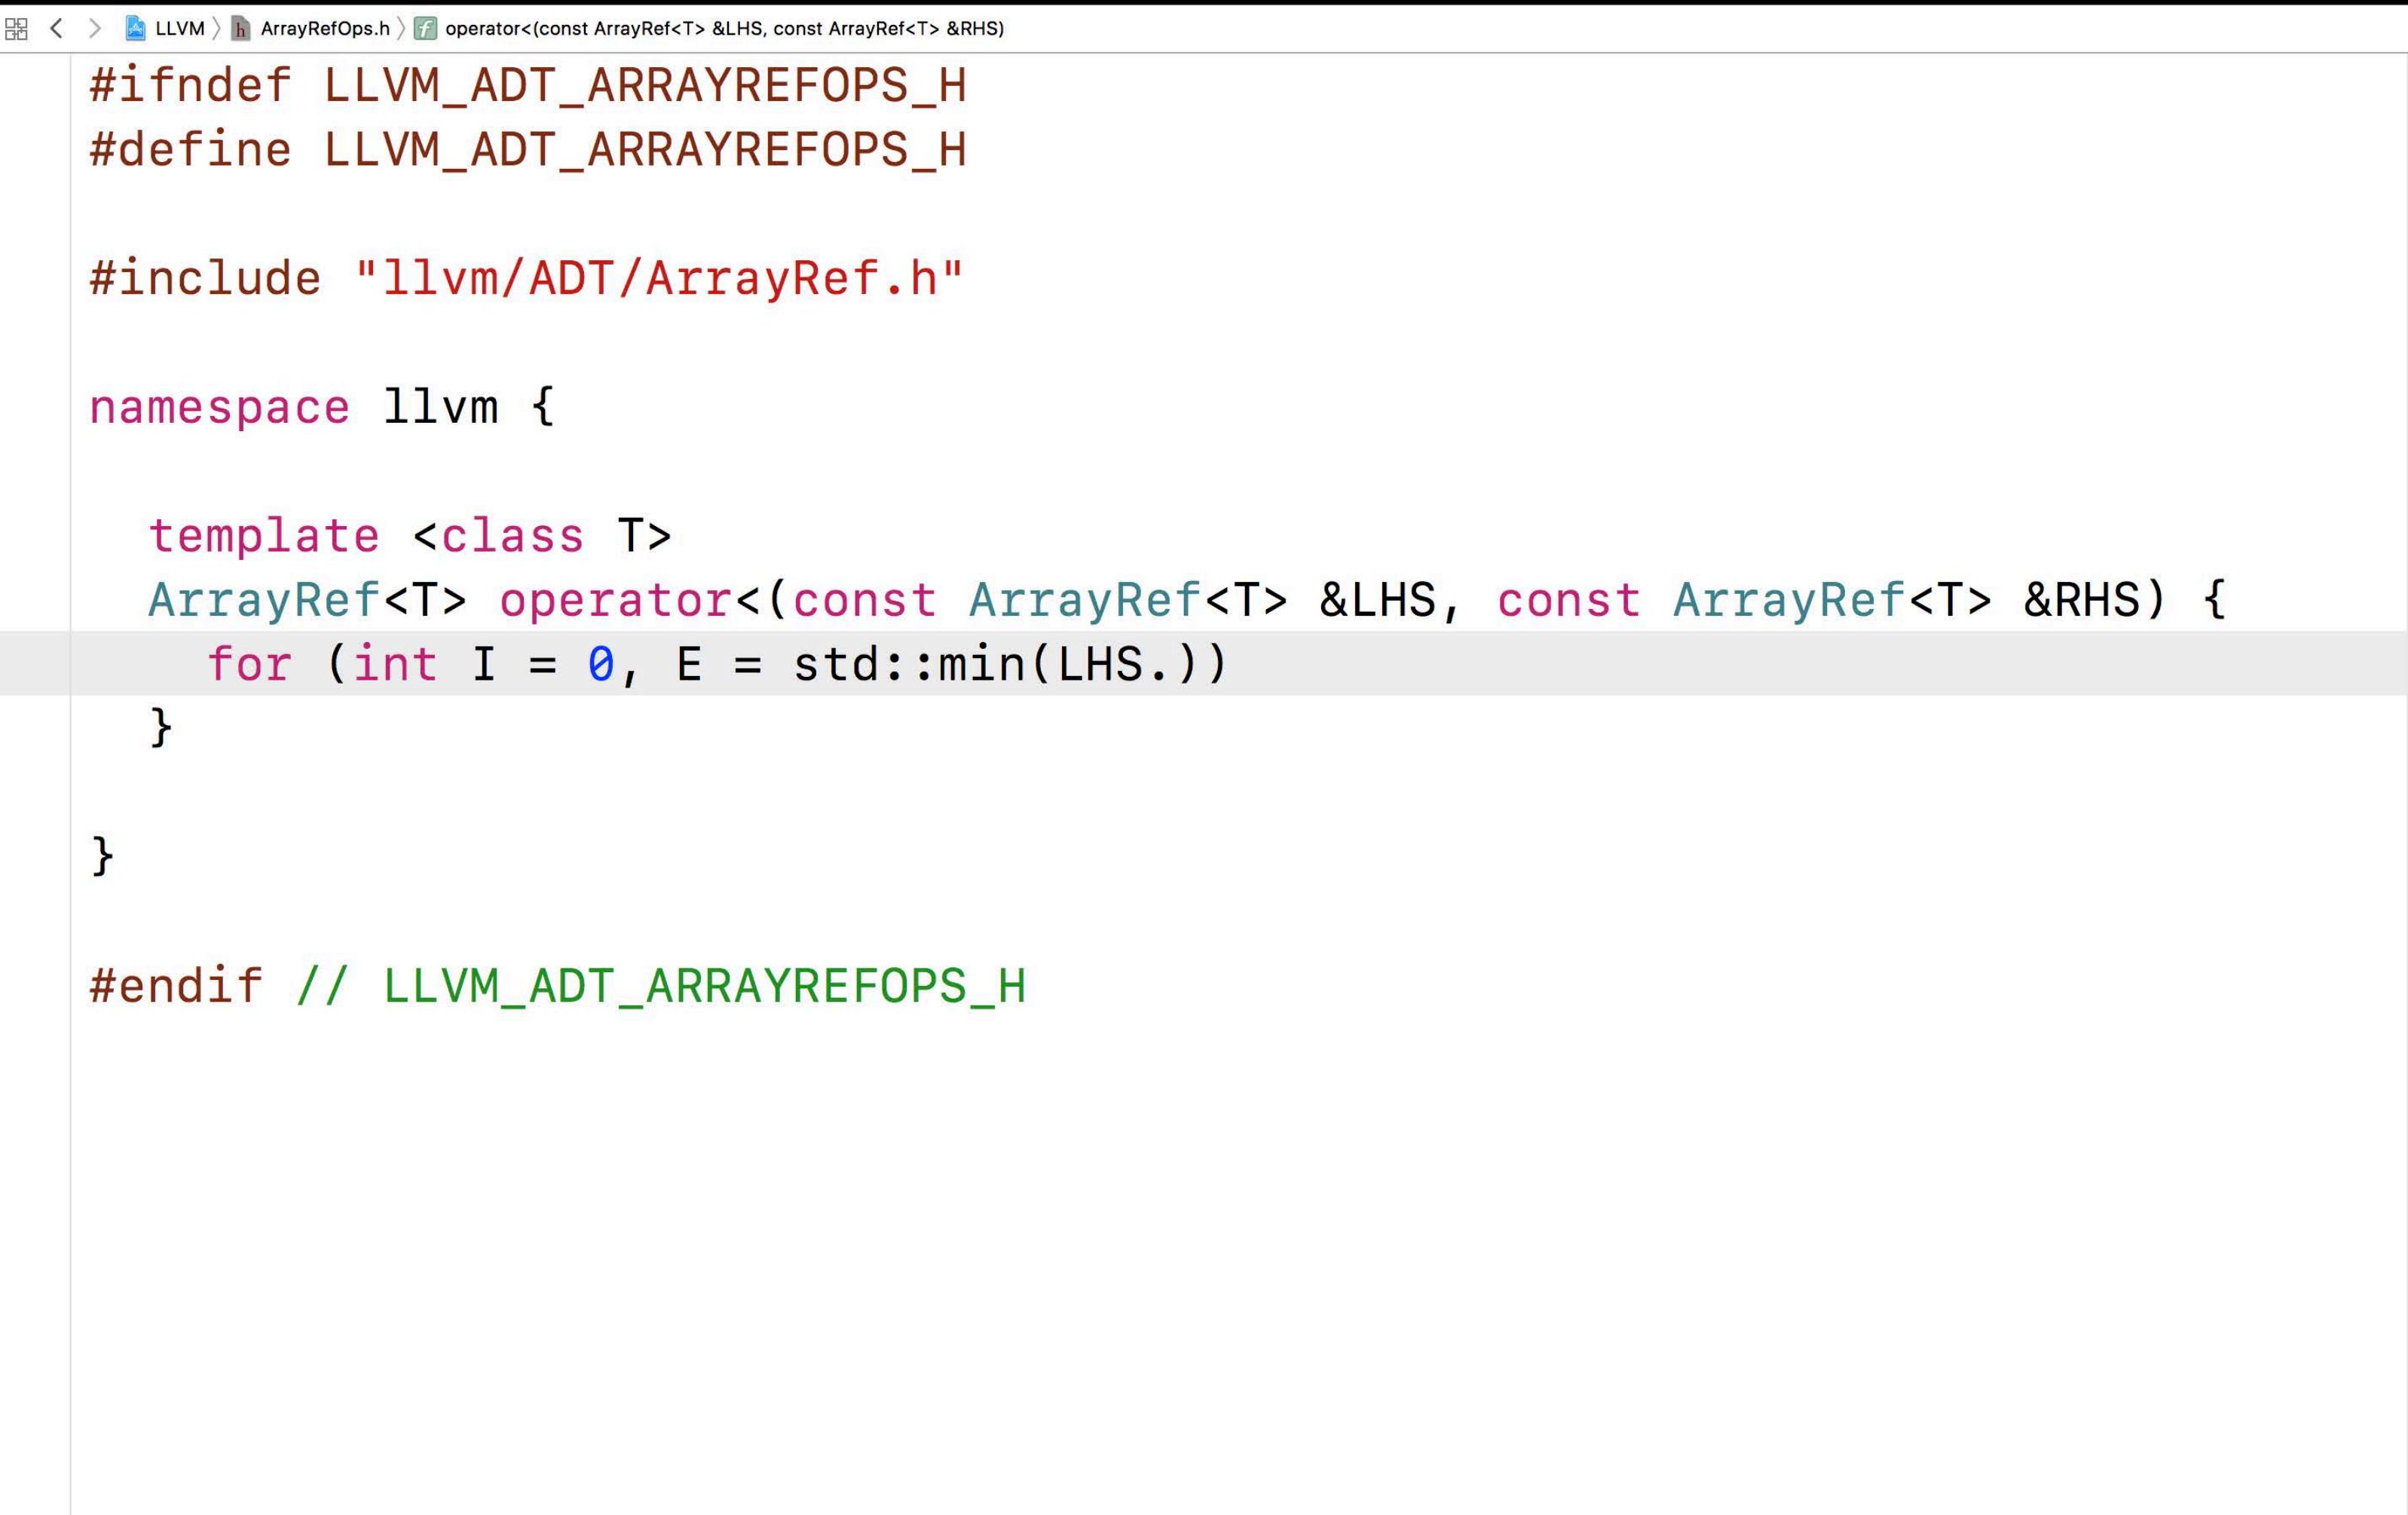

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.))
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

A screenshot of a MacBook Pro displaying an IDE window. The window shows the file `LLVM/ArrayRefOps.h` with the function `operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS)`. A tooltip is open over the `back()` method, which is highlighted in blue. The tooltip lists several methods:

- `const T &back() const`
- `iterator begin() const`
- `const T *data() const`
- `ArrayRef<T> drop_back() const`
- `ArrayRef<T> drop_front() const`
- `bool empty() const`
- `iterator end() const`
- `bool equals(ArrayRef<T> RHS) const`

The tooltip also includes the description: "back - Get the last element."

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"


namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E; ++I)
            if (LHS[I] < RHS[I])
                return LHS;
            else if (LHS[I] > RHS[I])
                return RHS;
        }

        return LHS;
    }

    const T &back() const
    iterator begin() const
    const T *data() const
    ArrayRef<T> drop_back() const
    ArrayRef<T> drop_front() const
    bool empty() const
    iterator end() const
    bool equals(ArrayRef<T> RHS) const
}
```

MacBook Pro

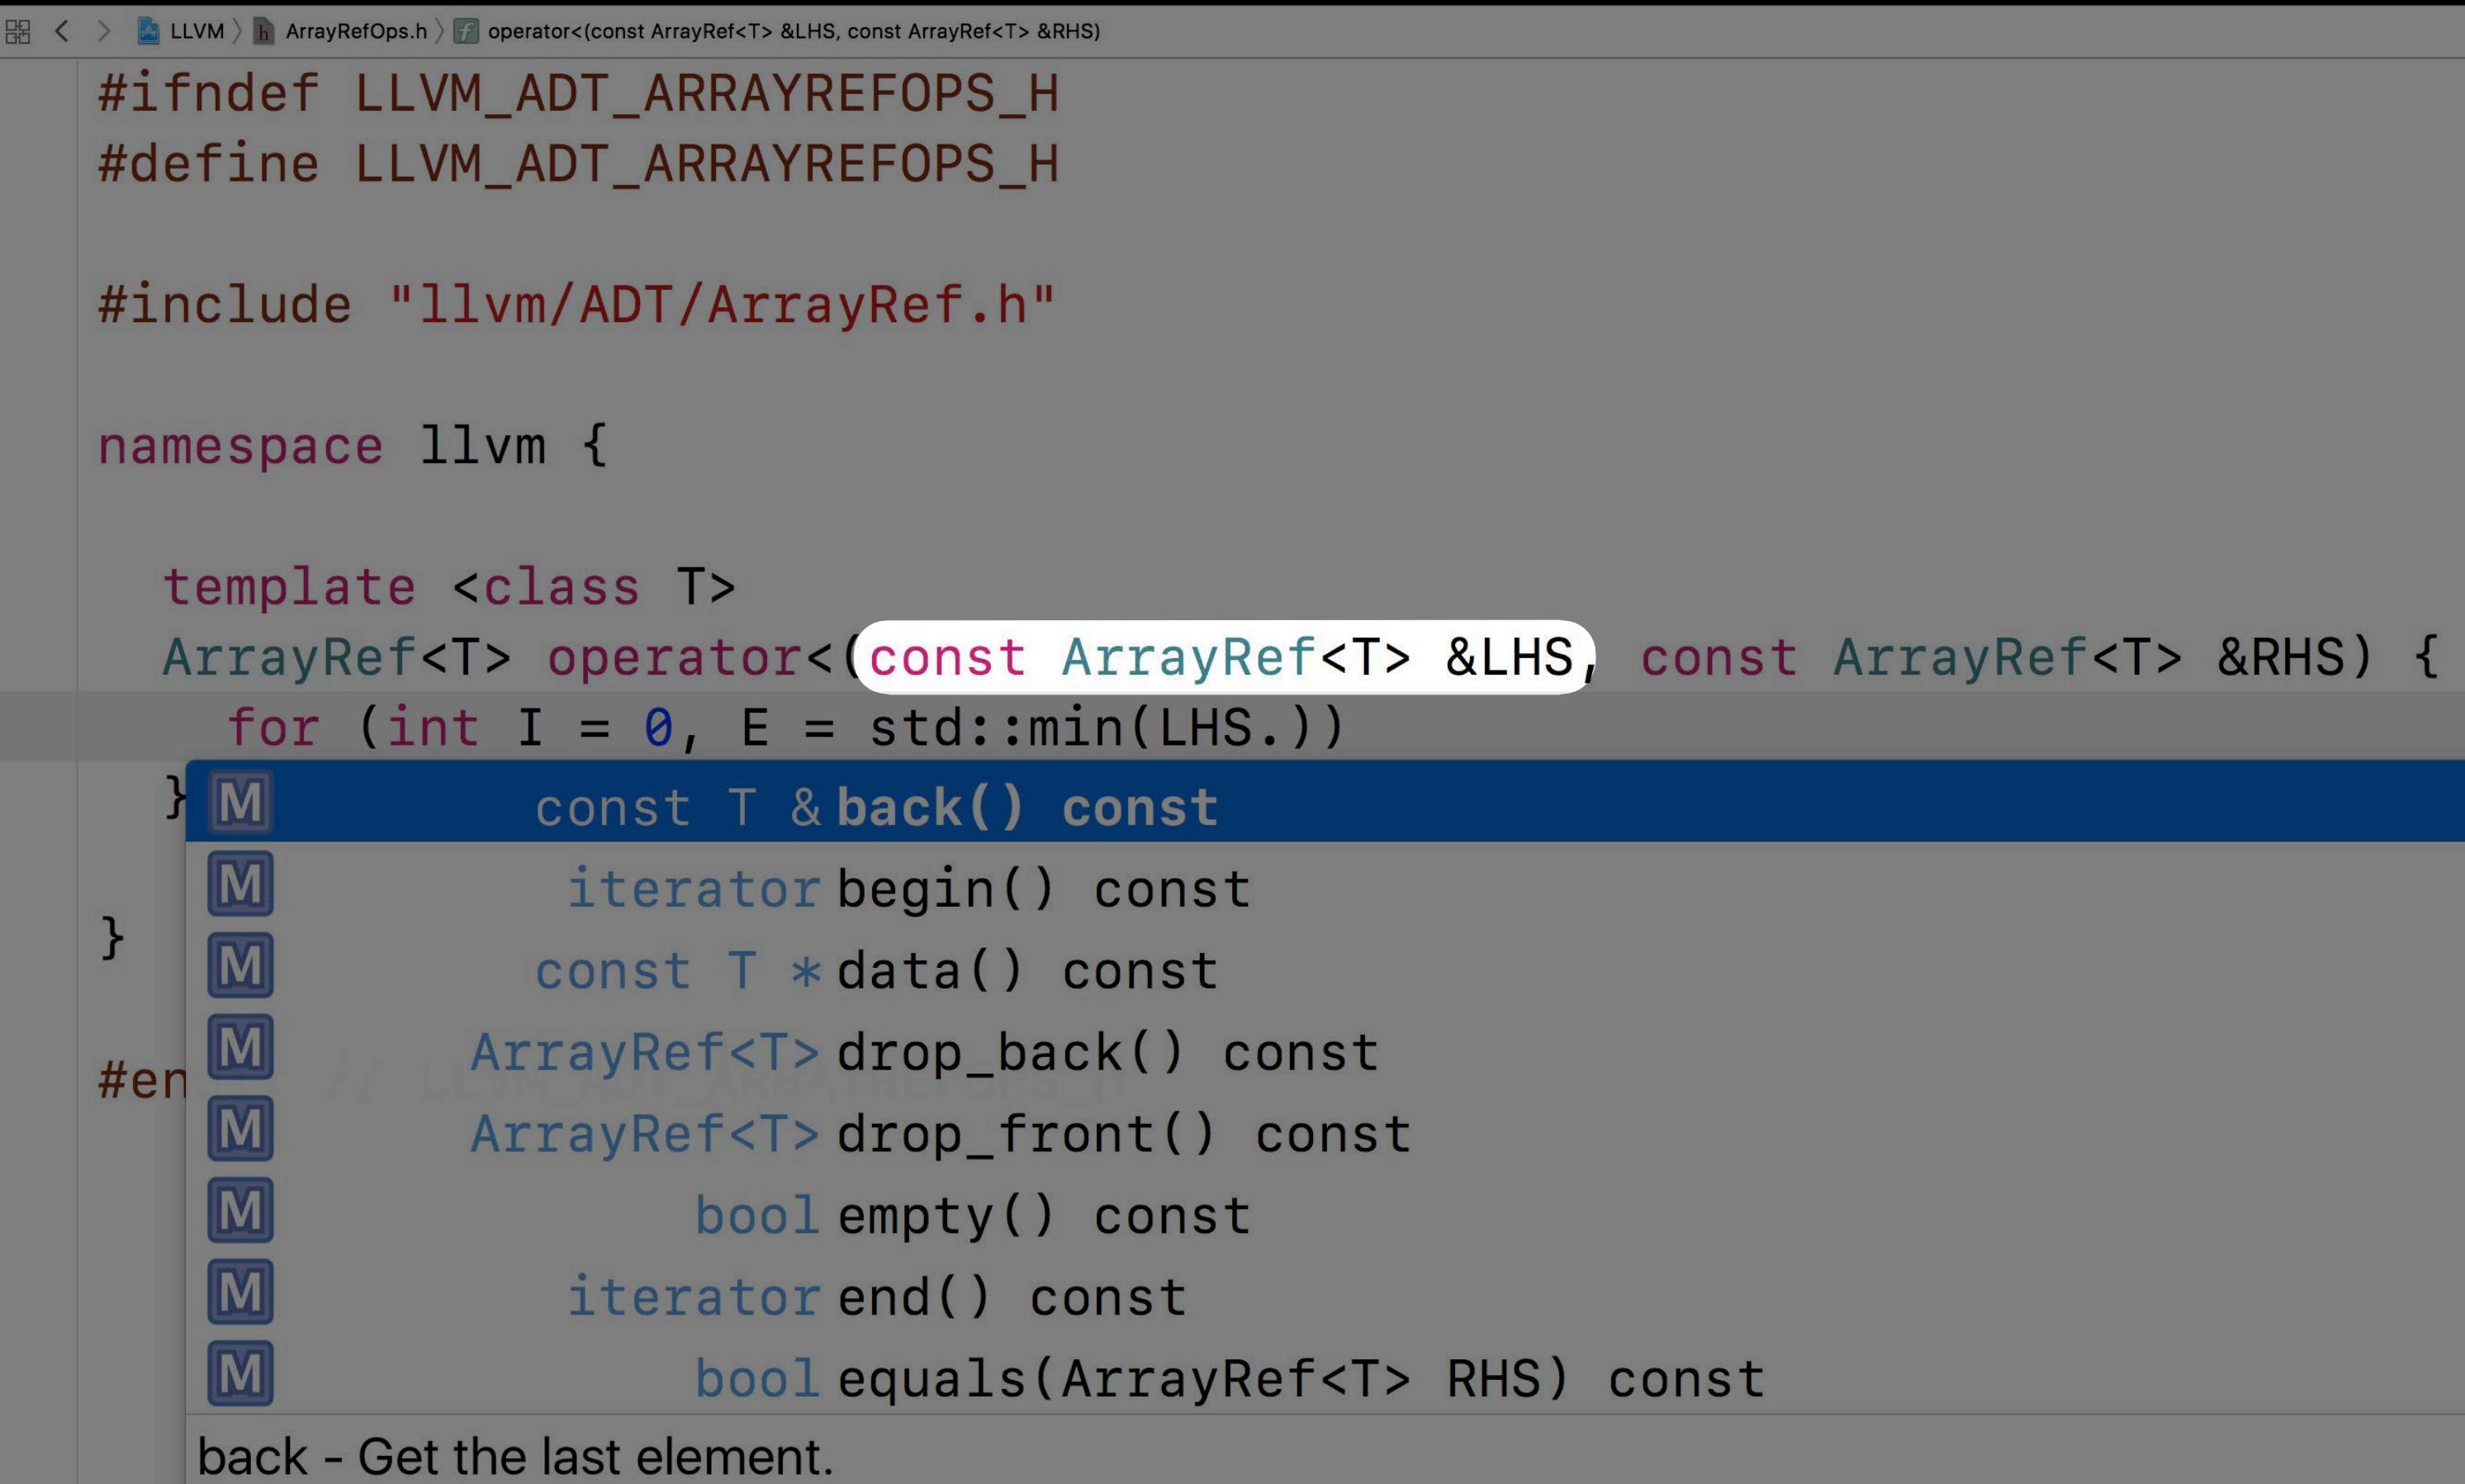

A screenshot of a MacBook Pro displaying a code editor window. The window shows LLVM source code for `operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS)`. A tooltip is open over the `operator<` line, listing various member functions of `ArrayRef<T>`. The function `const T &back() const` is highlighted in blue, indicating it is the current selection.

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E; ++I)
            if (LHS[I] != RHS[I])
                return false;
        return true;
    }

    class ArrayRef {
    public:
        const T &back() const;
        iterator begin() const;
        const T *data() const;
        ArrayRef<T> drop_back() const;
        ArrayRef<T> drop_front() const;
        bool empty() const;
        iterator end() const;
        bool equals(ArrayRef<T> RHS) const;
    };
}
```

back - Get the last element.

MacBook Pro


```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size()))
    }
}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

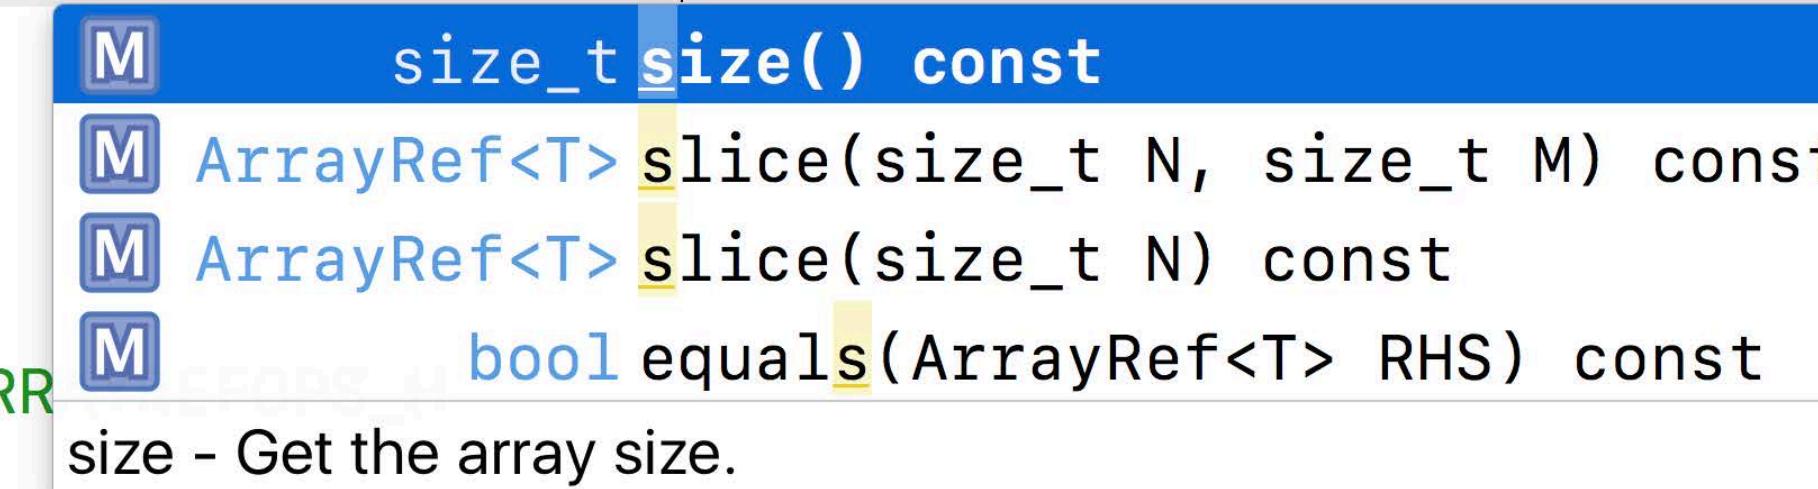

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size())) {
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I < E; ++I)
            if (LHS[I] < RHS[I])
                return true;
        return false;
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

A screenshot of a MacBook Pro displaying an IDE window. The window shows the file `LLVM/ArrayRefOps.h` with the function `operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS)`. A tooltip is open over the `back()` method, which is highlighted in blue. The tooltip lists several methods:

- `M const T &back() const`
- `M iterator begin() const`
- `M const T *data() const`
- `M ArrayRef<T> drop_back() const`
- `M ArrayRef<T> drop_front() const`
- `M bool empty() const`
- `M iterator end() const`
- `M bool equals(ArrayRef<T> RHS) const`

The text "back - Get the last element." is visible at the bottom of the tooltip.

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E; ++I)
            LHS[I] = RHS[I];
        return LHS;
    }

    // Implementation of back()
    const T &back() const
    iterator begin() const
    const T *data() const
    ArrayRef<T> drop_back() const
    ArrayRef<T> drop_front() const
    bool empty() const
    iterator end() const
    bool equals(ArrayRef<T> RHS) const
}
```


MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size());
}
#endif // LLVM_ADT_ARRAYREFOPS_H
```

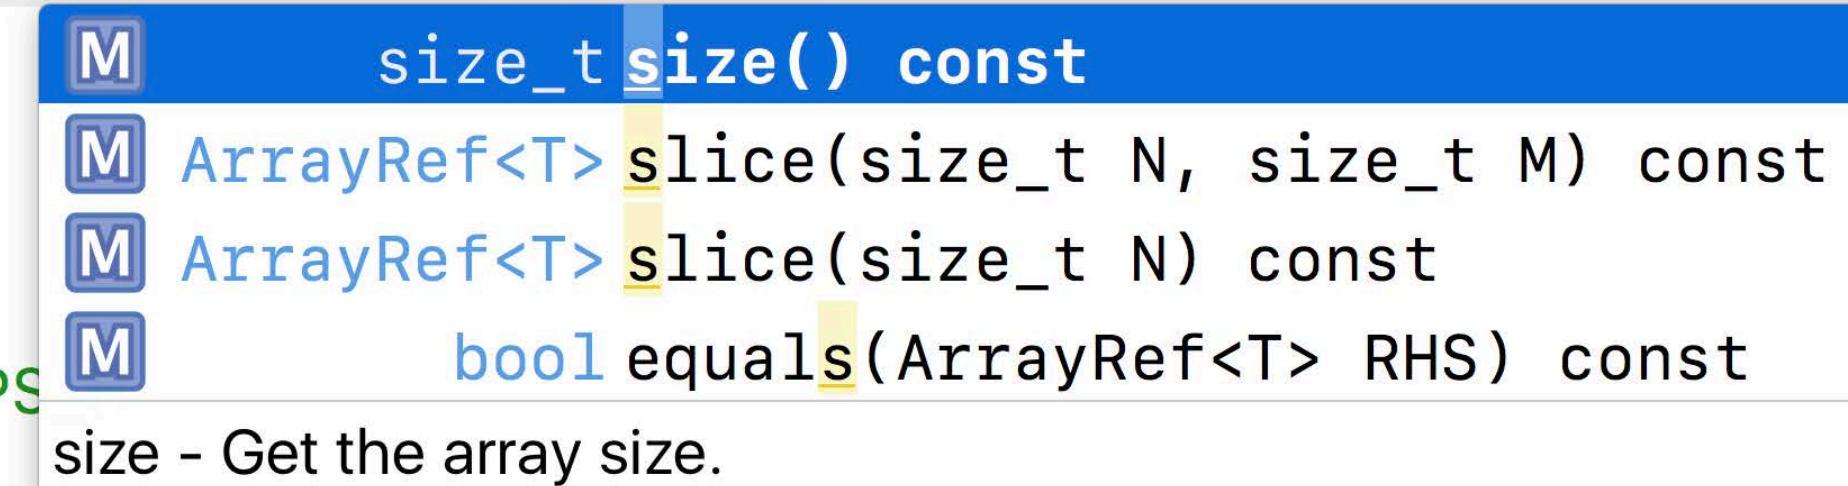

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H


#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); )
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

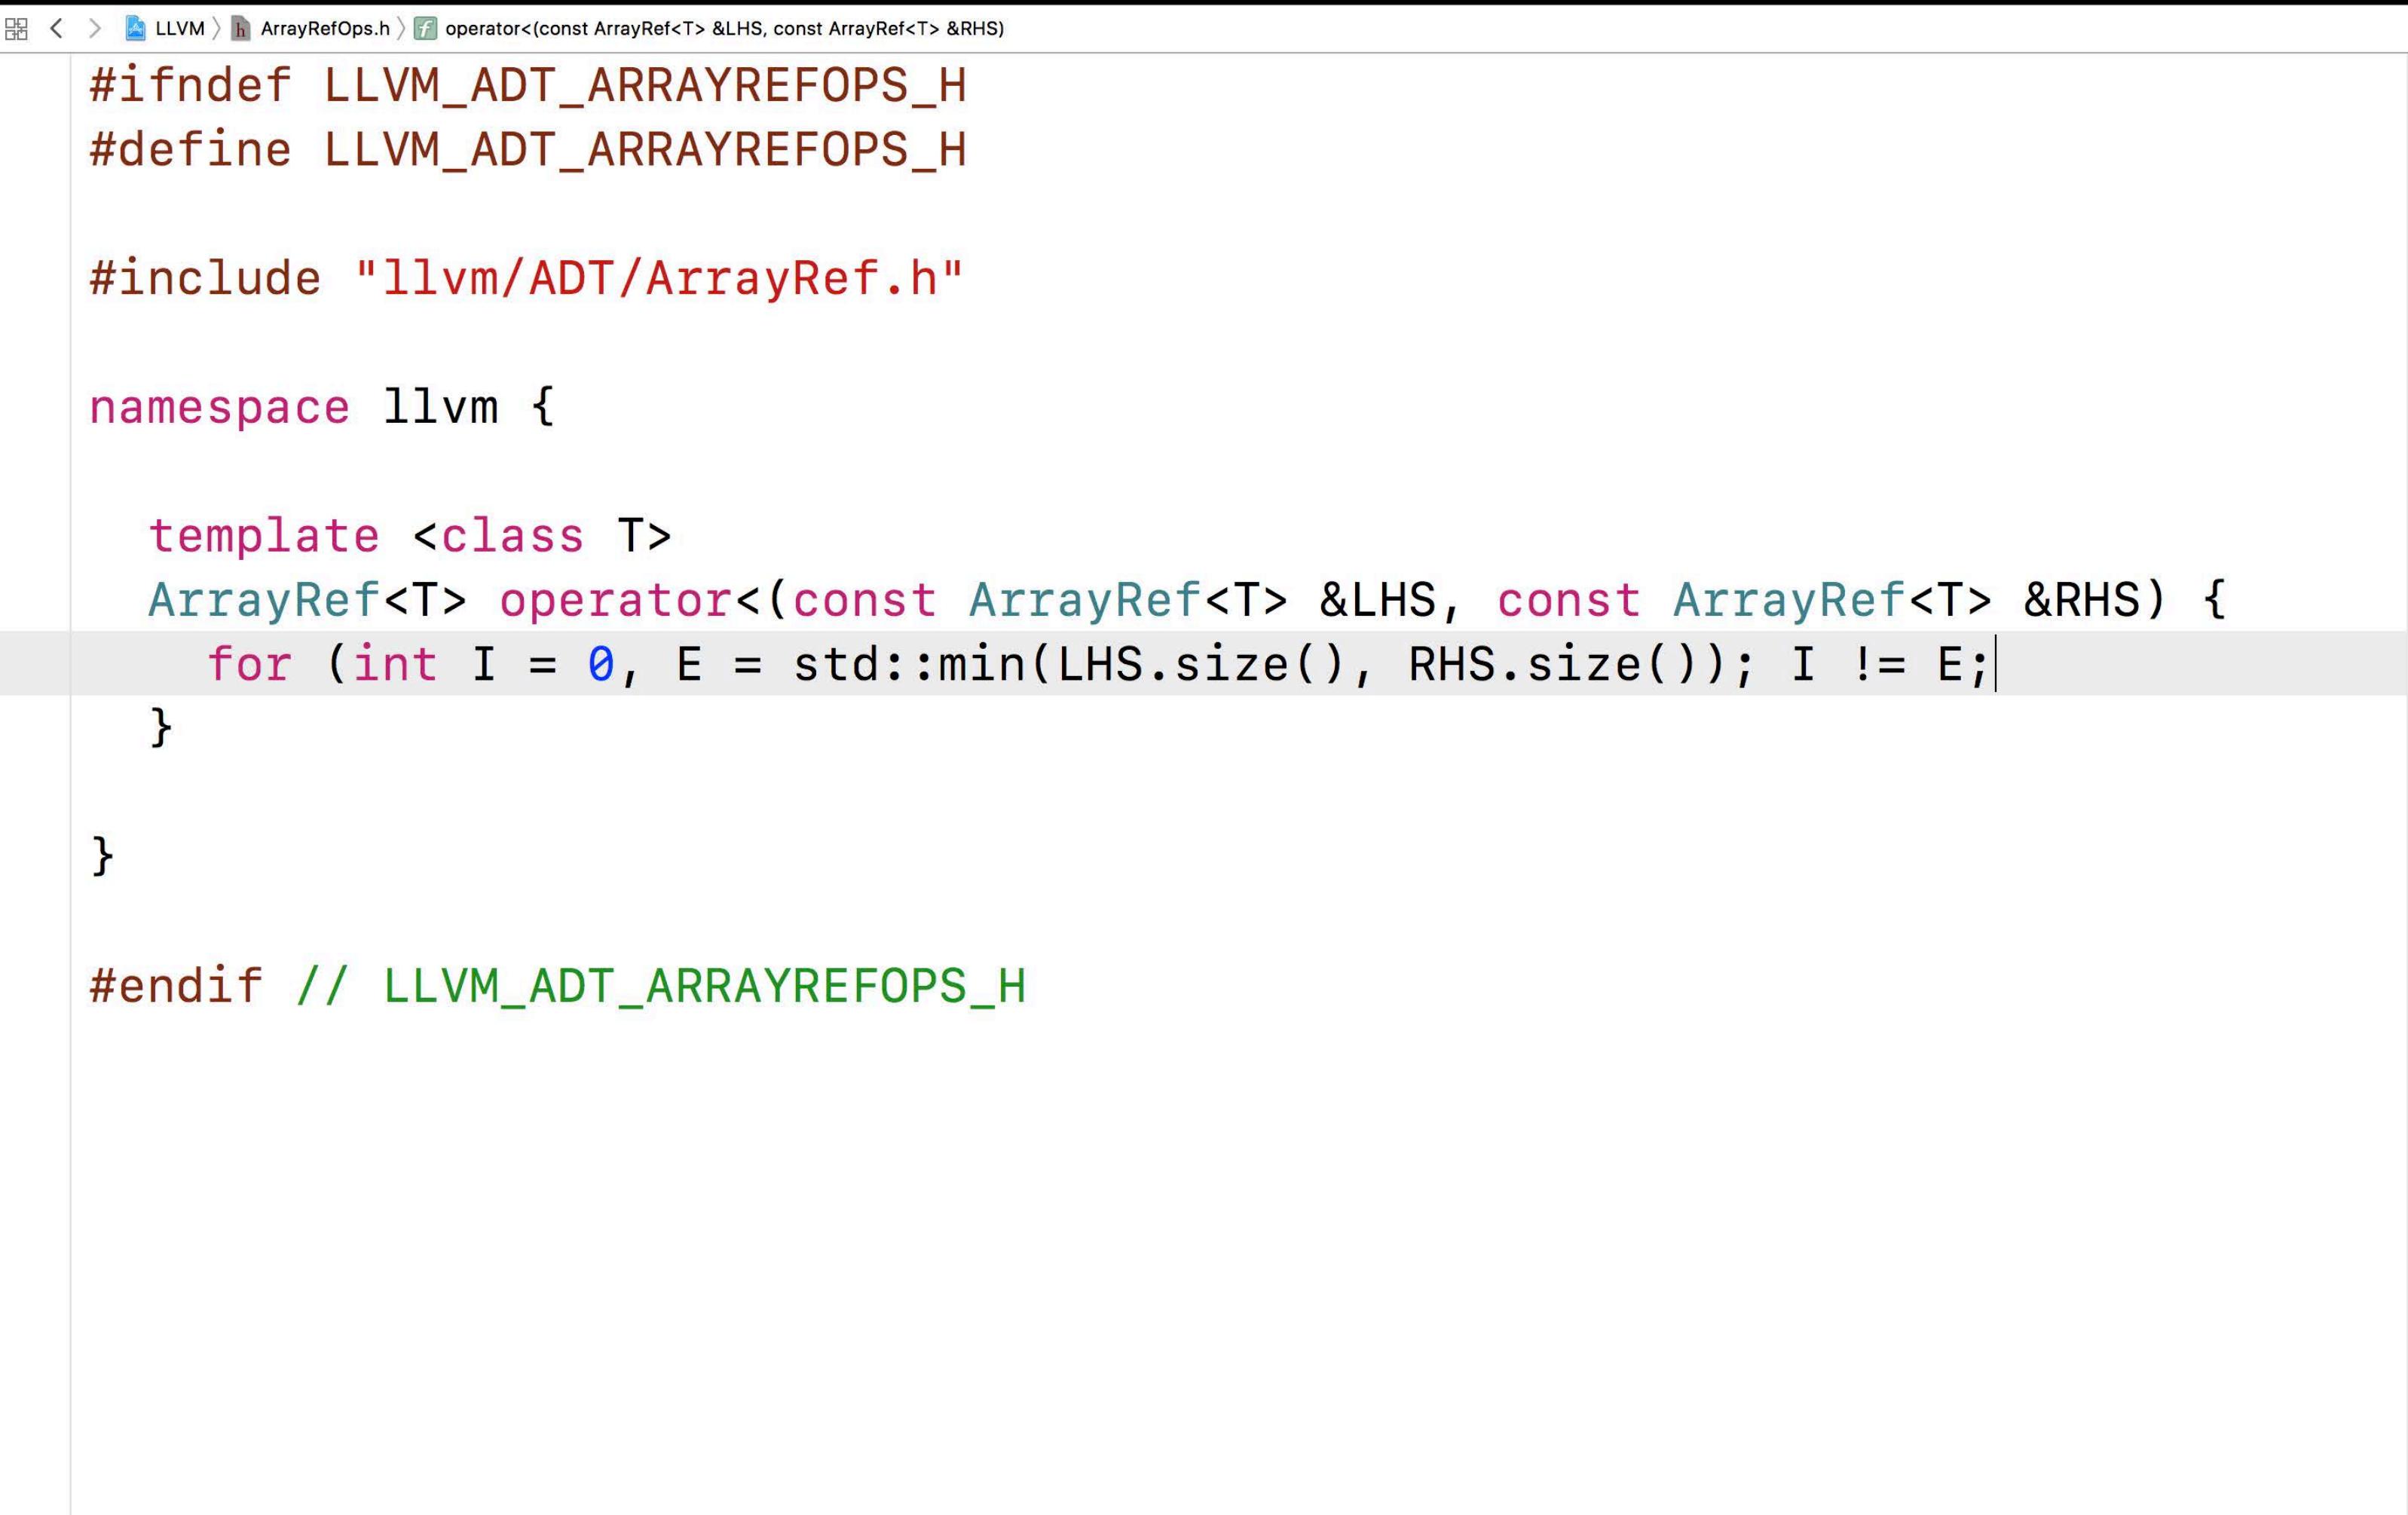

The image shows a dark-themed code editor window with a black background. The window title bar reads "LLVM > ArrayRefOps.h". The code itself is written in C++ and defines an operator< for ArrayRef objects. It includes the LLVM/ADT/ArrayRef.h header and uses std::min to determine the size of the arrays being compared.

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E;)
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

LLVM > ArrayRefOps.h operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS)

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E; ++I)
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E; ++I) {
            if (LHS[I] < RHS[I])
                return true;
        }
        return false;
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

LLVM > ArrayRefOps.h > operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS)

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E; ++I) {
            if (LHS[I] < RHS[I])
                return true;
        }
    }

}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E; ++I) {
            if (LHS[I] < RHS[I])
                return true;
            if (RHS[I] < LHS[I])
                return false;
        }
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E; ++I) {
            if (LHS[I] < RHS[I])
                return true;
            if (RHS[I] < LHS[I])
                return false;
        }
        return LHS.
    }

}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

back - Get the last element.
M     const T & back() const
M     iterator begin() const
M     const T * data() const
M     ArrayRef<T> drop_back() const
M     ArrayRef<T> drop_front() const
M     bool empty() const
M     iterator end() const
M     bool equals(ArrayRef<T> RHS) const
return LHS.
}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        size - Get the array size.
        if (E = std::min(LHS.size(), RHS.size()); I != E; ++I) {
            M size_t size() const
            M ArrayRef<T> slice(size_t N, size_t M) const
            M ArrayRef<T> slice(size_t N) const
            M bool equals(ArrayRef<T> RHS) const
                return LHS.s
        }
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E; ++I) {
            if (LHS[I] < RHS[I])
                return true;
            if (RHS[I] < LHS[I])
                return false;
        }
        return LHS.size()
    }

}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E; ++I) {
            if (LHS[I] < RHS[I])
                return true;
            if (RHS[I] < LHS[I])
                return false;
        }
        return LHS.size() < RHS.
    }

}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

A screenshot of a MacBook Pro displaying a code editor window. The window title is "LLVM > ArrayRefOps.h". The code shown is the header file `operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS)`. A tooltip or code completion dropdown is open over the `back` method, listing several members starting with 'M' (Method) and 't' (Iterator).

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

nam back - Get the last element.
M     const T &back() const
t M     iterator begin() const
A M     const T *data() const
M     ArrayRef<T> drop_back() const
M     ArrayRef<T> drop_front() const
M     bool empty() const
M     iterator end() const
M     bool equals(ArrayRef<T> RHS) const
return LHS.size() < RHS.
}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int size - Get the array size.
            if (LHS.size() < RHS.size())
                return false;
            if (RHS.size() < LHS.size())
                return true;
            for (int i = 0; i < LHS.size(); i++) {
                if (LHS[i] > RHS[i])
                    return true;
                if (RHS[i] > LHS[i])
                    return false;
            }
        }
        return LHS.size() < RHS.size();
    }

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E; ++I) {
            if (LHS[I] < RHS[I])
                return true;
            if (RHS[I] < LHS[I])
                return false;
        }
        return LHS.size() < RHS.size()
    }

}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

```
#ifndef LLVM_ADT_ARRAYREFOPS_H
#define LLVM_ADT_ARRAYREFOPS_H

#include "llvm/ADT/ArrayRef.h"

namespace llvm {

    template <class T>
    ArrayRef<T> operator<(const ArrayRef<T> &LHS, const ArrayRef<T> &RHS) {
        for (int I = 0, E = std::min(LHS.size(), RHS.size()); I != E; ++I) {
            if (LHS[I] < RHS[I])
                return true;
            if (RHS[I] < LHS[I])
                return false;
        }
        return LHS.size() < RHS.size();
    }

}

#endif // LLVM_ADT_ARRAYREFOPS_H
```

MacBook Pro

Features from C++17

Decomposing a Returned Tuple Is Awkward

```
std::tuple<int, double, char> compute();
void run() {
    int a; double b; char c;
    std::tie(a, b, c) = compute();
    ...
}
```

Decomposing a Returned Tuple Is Awkward

```
std::tuple<int, double, char> compute();
void run() {
    int a; double b; char c;
    std::tie(a, b, c) = compute();
    ...
}
```

Boilerplate `std::tie`

Decomposing a Returned Tuple Is Awkward

```
std::tuple<int, double, char> compute();
void run() {
    int a; double b; char c;
    std::tie(a, b, c) = compute();
    ...
}
```

Boilerplate `std::tie`

Cannot infer types

Decomposing a Returned Tuple Is Awkward

```
std::tuple<int, double, char> compute();
void run() {
    int a; double b; char c;
    std::tie(a, b, c) = compute();
    ...
}
```

Boilerplate `std::tie`

Cannot infer types

Repeated variable names

Structured Binding

Naturally decompose tuple-like types

```
std::tuple<int, double, char> compute();
void run() {
    int a; double b; char c;
    std::tie(a, b, c) = compute();
    ...
}
```

Structured Binding

Naturally decompose tuple-like types

```
std::tuple<int, double, char> compute();
void run() {
    [a, b, c] = compute();
    ...
}
```

Structured Binding

Naturally decompose tuple-like types

NEW

```
std::tuple<int, double, char> compute();
void run() {
    auto [a, b, c] = compute();
    ...
}
```

Use `auto [...]` to decompose `std::tuple`

Structured Binding

Naturally decompose tuple-like types

NEW

```
std::tuple<int, double, char> compute();
void run() {
    auto [a, b, c] = compute();
    ...
}
```

Use `auto [...]` to decompose `std::tuple`

Supports anything that implements `std::get`

Structured Binding

Naturally decompose tuple-like types

NEW

```
struct Point { double x; double y; double z; };  
Point computeMidpoint(Point p1, Point p2);  
...  
auto [x, y, z] = computeMidpoint(src, dest);
```

Use `auto [...]` to decompose `std::tuple`

Supports anything that implements `std::get`

Supports plain-old data types

Structured Binding

Naturally decompose tuple-like types

NEW

```
struct Point { double x; double y; double z; };  
Point computeMidpoint(Point p1, Point p2);  
...  
auto [x, y, z] = computeMidpoint(src, dest);
```

Use `auto [...]` to decompose `std::tuple`

Supports anything that implements `std::get`

Supports plain-old data types

Structured Binding

Naturally decompose tuple-like types

NEW

```
struct Point { double x; double y; double z; };  
Point computeMidpoint(Point p1, Point p2);  
...  
auto [x, y, z] = computeMidpoint(src, dest);
```

Use `auto [...]` to decompose `std::tuple`

Supports anything that implements `std::get`

Supports plain-old data types

Initializers in if Statements

Minimize scope of local variables

Initializers in if Statements

Minimize scope of local variables

NEW

```
if (auto slash = path.rfind('/'); slash != std::string::npos)
    return {path.substr(0, slash), path.substr(slash + 1)};
```

Initializers in if Statements

Minimize scope of local variables

NEW

```
if (auto slash = path.rfind('/'); slash != std::string::npos)
    return {path.substr(0, slash), path.substr(slash + 1)};
```

Initializer scoped to the `if` statement

Initializers in if Statements

Minimize scope of local variables

NEW

```
if (auto slash = path.rfind('/'); slash != std::string::npos)  
    return {path.substr(0, slash), path.substr(slash + 1)};
```

Initializer scoped to the if statement

Condition can reference new local variables

Initializers in if Statements

Minimize scope of local variables

NEW

```
if (auto slash = path.rfind('/'); slash != std::string::npos)  
    return {path.substr(0, slash), path.substr(slash + 1)};
```

Initializer scoped to the if statement

Condition can reference new local variables

Initializers in if Statements

Minimize scope of local variables

NEW

```
if (auto slash = path.rfind('/'); slash != std::string::npos)  
    return {path.substr(0, slash), path.substr(slash + 1)};
```

Initializer scoped to the if statement

Condition can reference new local variables

Same feature works for switch statements

Initializers in if Statements

Minimize scope of local variables

```
if (auto slash = path.rfind('/'); slash != std::string::npos)
    return {path.substr(0, slash), path.substr(slash + 1)};
```

Initializers in if Statements

Minimize scope of local variables

```
if (auto slash = path.rfind('/'); slash != std::string::npos)
    return {path.substr(0, slash), path.substr(slash + 1);}

// Much later, in unrelated code...
if (slash != std::string::npos)
    launchTheSpaceship();
```

Initializers in if Statements

Minimize scope of local variables

```
if (auto slash = path.rfind('/'); slash != std::string::npos)  
    return {path.substr(0, slash), path.substr(slash + 1)};
```

// Much later, in unrelated code...

```
if (slash != std::string::npos)  
    launchTheSpaceship();
```



Use of undeclared identifier 'slash'

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}  
...  
auto fifth_node = advance(list.begin(), 5);
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}  
  
...  
auto fifth_node = advance(list.begin(), 5);
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}  
...  
auto fifth_node = advance(list.begin(), 5);  
auto fifth_char = advance(string.begin(), 5);
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}  
...  
auto fifth_node = advance(list.begin(), 5);  
auto fifth_char = advance(string.begin(), 5);
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    if (is_random_access_iterator_v<Iterator>)  
        return it + n;  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}  
...  
auto fifth_node = advance(list.begin(), 5);  
auto fifth_char = advance(string.begin(), 5);
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    if (is_random_access_iterator_v<Iterator>)  
        return it + n;  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}  
...  
auto fifth_node = advance(list.begin(), 5);  
auto fifth_char = advance(string.begin(), 5);
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    if (is_random_access_iterator_v<Iterator>)  
        return it + n;  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}  
...  
auto fifth_node = advance(list.begin(), 5);  
auto fifth_char = advance(string.begin(), 5);
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    if (is_random_access_iterator_v<Iterator>)  
        return it + n;  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}  
...  
auto fifth_node = advance(list.begin(), 5);  
auto fifth_char = advance(string.begin(), 5);
```



Invalid operands to binary expression...



... in instantiation of function template specialization

Example: Specializing a Generic Algorithm

Advancing an iterator

```
return it + n;

while (n > 0) { ++it; --n; }
while (n < 0) { --it; ++n; }
return it;

template <class Iterator> Iterator advance(Iterator it, long n) {
    return ( is_random_access_iterator<Iterator> )
}
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance_dispatch(Iterator it, long n, true_type) {
    return it + n;
}
```

```
template <class Iterator> Iterator advance_dispatch(Iterator it, long n, false_type) {
    while (n > 0) { ++it; --n; }
    while (n < 0) { --it; ++n; }
    return it;
}
```

```
template <class Iterator> Iterator advance(Iterator it, long n) {
    return advance_dispatch(first, last, is_random_access_iterator<Iterator>());
}
```

Example: Specializing a Generic Algorithm

Advancing an iterator

```
template <class Iterator> Iterator advance(Iterator it, long n) {  
    if (is_random_access_iterator_v<Iterator>)  
        return it + n;  
    while (n > 0) { ++it; --n; }  
    while (n < 0) { --it; ++n; }  
    return it;  
}  
...  
auto fifth_node = advance(list.begin(), 5);  
auto fifth_char = advance(string.begin(), 5);
```



Invalid operands to binary expression...



... in instantiation of function template specialization

```
template <class Iterator> Iterator advance(Iterator it, long n) {
    if (is_random_access_iterator_v<Iterator>)
        return it + n; ! Invalid operands to binary expression...
    while (n > 0) { ++it; --n; }
    while (n < 0) { --it; ++n; }
    return it;
}
...
auto fifth_node = advance(list.begin(), 5); ! ... in instantiation of function template specialization
auto fifth_char = advance(string.begin(), 5);
```

constexpr Evaluation of if Statements

An alternative to compile-time dispatch

NEW

```
template <class Iterator> Iterator advance(Iterator it, long n) {
    if constexpr (is_random_access_iterator_v<Iterator>)
        return it + n;
    while (n > 0) { ++it; --n; }
    while (n < 0) { --it; ++n; }
    return it;
}
...
auto fifth_node = advance(list.begin(), 5);
auto fifth_char = advance(string.begin(), 5);
```



Invalid operands to binary expression...



... in instantiation of function template specialization

constexpr Evaluation of if Statements

An alternative to compile-time dispatch

NEW

```
template <class Iterator> Iterator advance(Iterator it, long n) {
    if constexpr (is_random_access_iterator_v<Iterator>)
        return it + n;
    while (n > 0) { ++it; --n; }
    while (n < 0) { --it; ++n; }
    return it;
}
...
auto fifth_node = advance(list.begin(), 5);
auto fifth_char = advance(string.begin(), 5);
```

constexpr Evaluation of if Statements

An alternative to compile-time dispatch

NEW

```
template <class Iterator> Iterator advance(Iterator it, long n) {
    if constexpr (is_random_access_iterator_v<Iterator>)
        return it + n;
    while (n > 0) { ++it; --n; }
    while (n < 0) { --it; ++n; }
    return it;
}
...
auto fifth_node = advance(list.begin(), 5);
auto fifth_char = advance(string.begin(), 5);
```

constexpr Evaluation of if Statements

An alternative to compile-time dispatch

NEW

```
template <class Iterator> Iterator advance(Iterator it, long n) {
    if constexpr (is_random_access_iterator_v<Iterator>)
        return it + n;
    while (n > 0) { ++it; --n; }
    while (n < 0) { --it; ++n; }
    return it;
}
...
auto fifth_node = advance(list.begin(), 5);
auto fifth_char = advance(string.begin(), 5);
```

constexpr Evaluation of if Statements

An alternative to compile-time dispatch

NEW

```
template <class Iterator> Iterator advance(Iterator it, long n) {
    if constexpr (is_random_access_iterator_v<Iterator>)
        return it + n;
    while (n > 0) { ++it; --n; }
    while (n < 0) { --it; ++n; }
    return it;
}
...
auto fifth_node = advance(list.begin(), 5);
auto fifth_char = advance(string.begin(), 5);
```

Problems with std::string-based APIs

Problems with std::string-based APIs

```
#include <string>

std::pair<std::string, std::string> split(const std::string &path) {
    if (auto slash = path.rfind('/'); slash != std::string::npos)
        return {path.substr(0, slash), path.substr(slash + 1)};
    return {std::string{}, path};
}
```

Problems with std::string-based APIs

```
#include <string>

std::pair<std::string, std::string> split(const std::string &path) {
    if (auto slash = path.rfind('/'); slash != std::string::npos)
        return {path.substr(0, slash), path.substr(slash + 1)};
    return {std::string{}, path};
}
```

Problems with std::string-based APIs

```
#include <string>
std::pair<std::string, std::string> split(const std::string &path) {
    if (auto slash = path.rfind('/'); slash != std::string::npos)
        return {path.substr(0, slash), path.substr(slash + 1)};
    return {std::string{}, path};
}
```

Problems with std::string-based APIs

```
#include <string>

std::pair<std::string, std::string> split(const std::string &path) {
    if (auto slash = path.rfind('/'); slash != std::string::npos)
        return {path.substr(0, slash), path.substr(slash + 1)};
    return {std::string{}, path};
}
```

Problems with std::string-based APIs

```
#include <string>
std::pair<std::string, std::string> split(const std::string &path) {
    if (auto slash = path.rfind('/'); slash != std::string::npos)
        return {path.substr(0, slash), path.substr(slash + 1)};
    return {std::string{}, path};
}
```

Substrings are copies and can be expensive

```
#include <string>
std::pair<std::string, std::string> split(const std::string &path) {
    if (auto slash = path.rfind('/'); slash != std::string::npos)
        return {path.substr(0, slash), path.substr(slash + 1)};
    return {std::string{}, path};
}
```

```
#include <string_view>
std::pair<std::string_view, std::string_view> split(std::string_view path) {
    if (auto slash = path.rfind('/'); slash != std::string_view::npos)
        return {path.substr(0, slash), path.substr(slash + 1)};
    return {std::string_view{}, path};
}
```

std::string_view

Reference a string without ownership

NEW

```
#include <string_view>
std::pair<std::string_view, std::string_view> split(std::string_view path) {
    if (auto slash = path.rfind('/'); slash != std::string_view::npos)
        return {path.substr(0, slash), path.substr(slash + 1)};
    return {std::string_view{}, path};
}
```

std::string_view

Reference a string without ownership

NEW

```
#include <string_view>
std::pair<std::string_view, std::string_view> split(std::string_view path) {
    if (auto slash = path.rfind('/'); slash != std::string_view::npos)
        return {path.substr(0, slash), path.substr(slash + 1)};
    return {std::string_view{}, path};
}
```

Encapsulates a `const char *` and a `size_t`

std::string_view

Reference a string without ownership

NEW

```
#include <string_view>
std::pair<std::string_view, std::string_view> split(std::string_view path) {
    if (auto slash = path.rfind('/'); slash != std::string_view::npos)
        return {path.substr(0, slash), path.substr(slash + 1)};
    return {std::string_view{}, path};
}
```

Encapsulates a `const char *` and a `size_t`

Rich string API, like `std::string`

std::string_view

Reference a string without ownership

NEW

```
#include <string_view>
std::pair<std::string_view, std::string_view> split(std::string_view path) {
    if (auto slash = path.rfind('/'); slash != std::string_view::npos)
        return {path.substr(0, slash), path.substr(slash + 1)};
    return {std::string_view{}, path};
}
```

Encapsulates a `const char *` and a `size_t`

Rich string API, like `std::string`

Never copies the string

Lifetime of a String Reference

A `string_view` has the lifetime of its source

Lifetime of a String Reference

A `string_view` has the lifetime of its source

Raw string literals are always safe

```
std::string_view getImagesPath() { return "resources/images"; }
```

Lifetime of a String Reference

A `string_view` has the lifetime of its source

Raw string literals are always safe

```
std::string_view getImagesPath() { return "resources/images"; }
```

Lifetime of a String Reference

A `string_view` has the lifetime of its source

Raw string literals are always safe

Arguments are safe if not stored

```
std::error_code open_file(std::string_view filename);
bool parse(std::string_view data);
bool parse_header(std::string_view header);
bool parse_body(std::string_view body);
bool parse_token(std::string_view token);
```

Lifetime of a String Reference

A `string_view` has the lifetime of its source

Raw string literals are always safe

Arguments are safe if not stored

Return values are usually safe when derived from arguments

```
std::pair<std::string_view, std::string_view> split(std::string_view path);  
...  
auto [directory, filename] = split(path);
```

Lifetime of a String Reference

A `string_view` has the lifetime of its source

Raw string literals are always safe

Arguments are safe if not stored

Return values are usually safe when derived from arguments

```
std::pair<std::string_view, std::string_view> split(std::string_view path);  
...  
auto [directory, filename] = split(path);
```

Lifetime of a String Reference

A `string_view` has the lifetime of its source

Raw string literals are always safe

Arguments are safe if not stored

Return values are usually safe when derived from arguments

```
std::pair<std::string_view, std::string_view> split(std::string_view path);  
...  
auto [directory, filename] = split(pwd + "/" + path);  
auto dot = filename.rfind('.');
```

Lifetime of a String Reference

A `string_view` has the lifetime of its source

Raw string literals are always safe

Arguments are safe if not stored

Return values are usually safe when derived from arguments

```
std::pair<std::string_view, std::string_view> split(std::string_view path);  
...  
auto [directory, filename] = split(pwd + "/" + path);  
auto dot = filename.rfind('.');
```



Lifetime of a String Reference

A `string_view` has the lifetime of its source

Raw string literals are always safe

Arguments are safe if not stored

Return values are usually safe when derived from arguments

```
std::pair<std::string_view, std::string_view> split(std::string_view path);  
...  
auto [directory, filename] = split(pwd + "/" + path);  
auto dot = filename.rfind('.');
```



Lifetime of a String Reference

A `string_view` has the lifetime of its source

Raw string literals are always safe

Arguments are safe if not stored

Return values are usually safe when derived from arguments

```
std::pair<std::string_view, std::string_view> split(std::string_view path);  
...  
auto [directory, filename] = split(pwd + "/" + path);  
auto dot = filename.rfind('.');
```



Address Sanitizer: Use of deallocated memory

Lifetime of a String Reference

A `string_view` has the lifetime of its source


Raw string literals are always safe

Arguments are safe if not stored

Return values are usually safe when derived from arguments

Build Setting: C++ Language Dialect

Use C++17 or GNU++17 to try out the new features

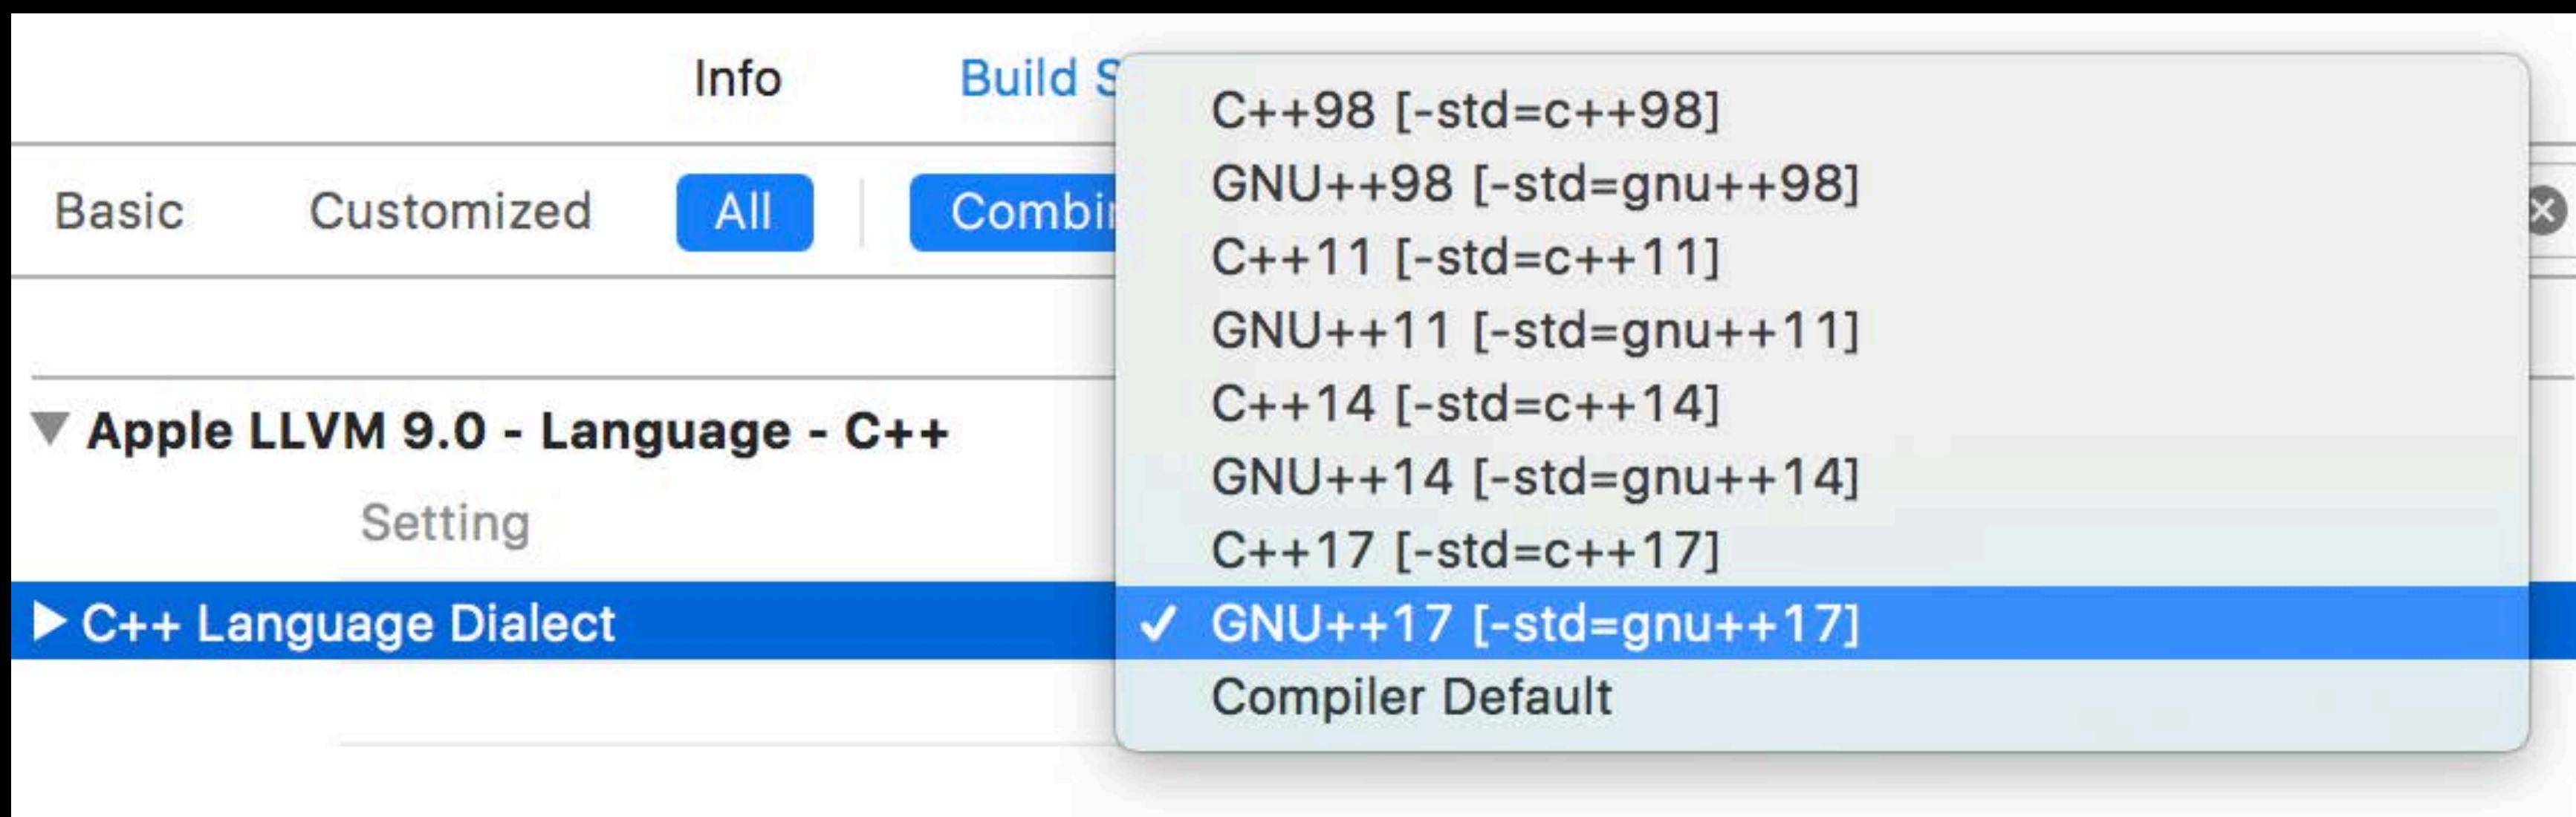


Build Setting: C++ Language Dialect

Use C++17 or GNU++17 to try out the new features

C++17

C++17 without language extensions

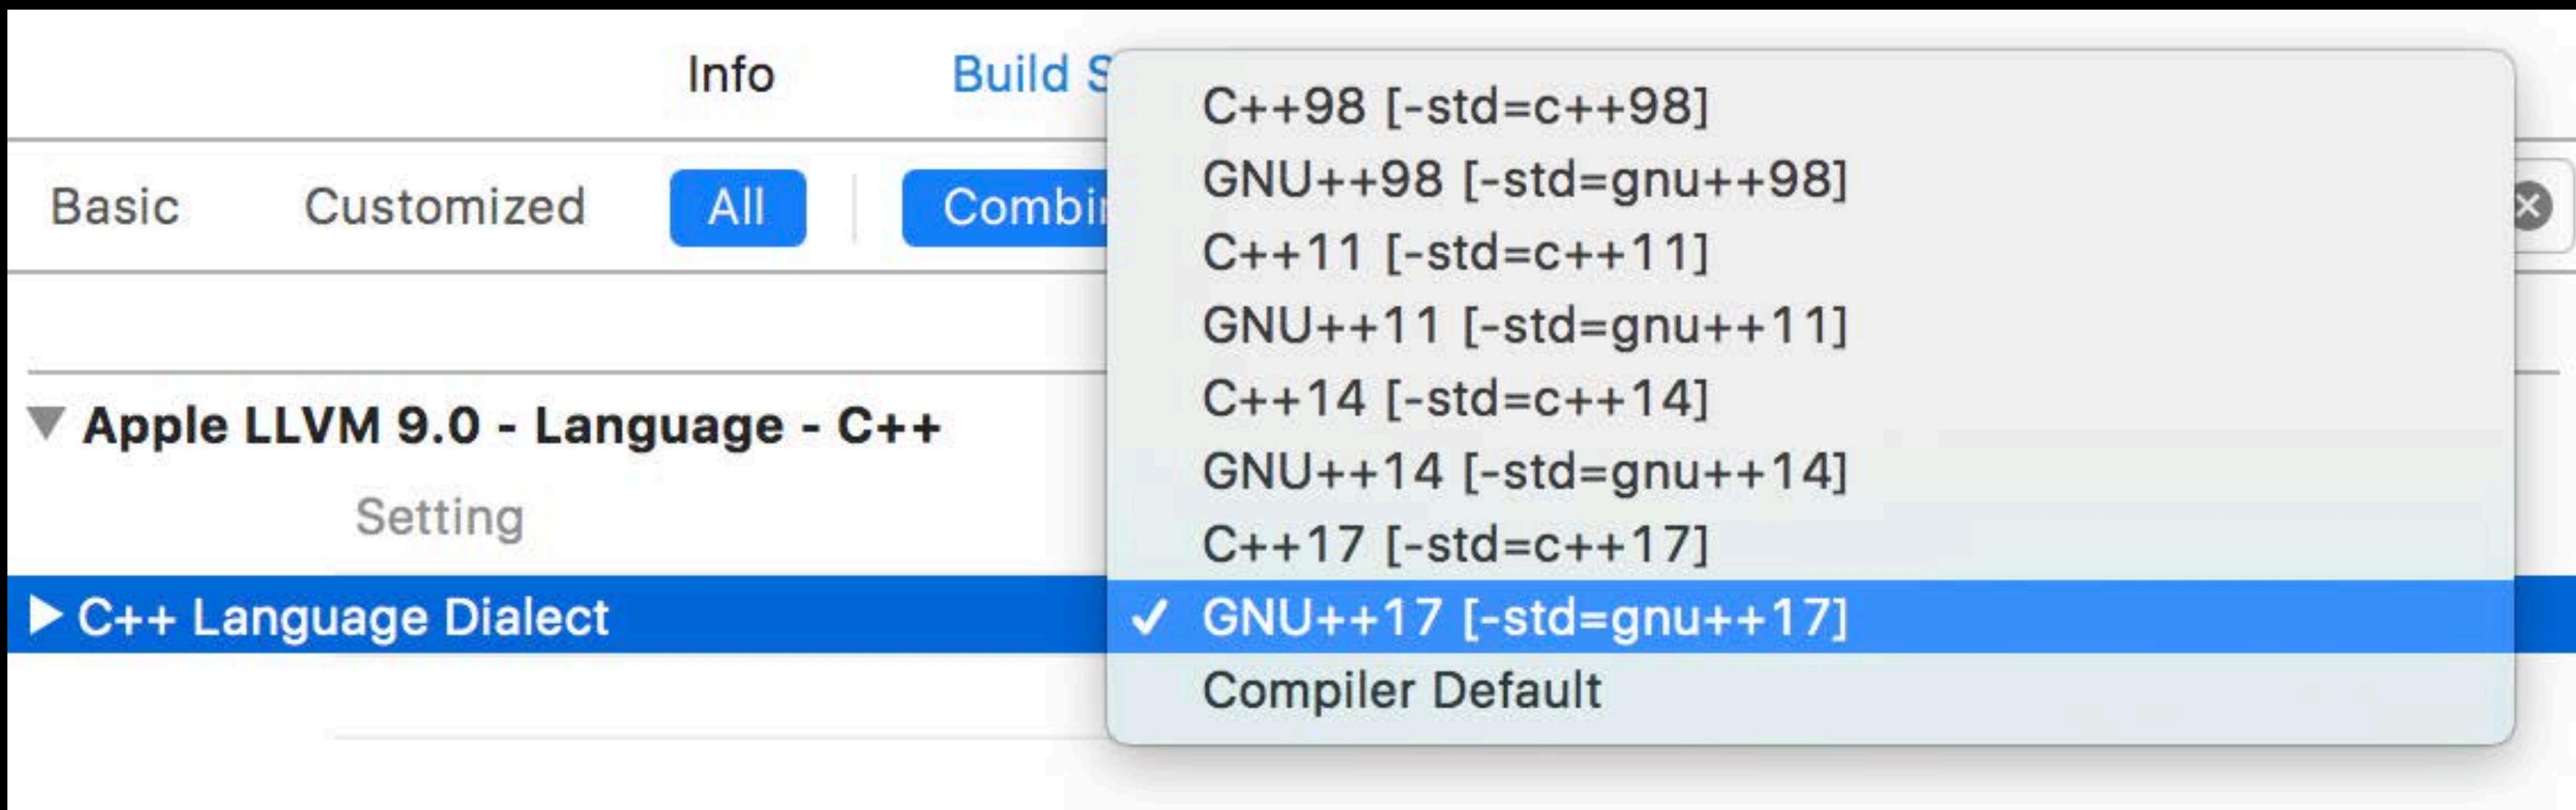

Build Setting: C++ Language Dialect


Use C++17 or GNU++17 to try out the new features

C++17

C++17 without language extensions

GNU++17

C++17 with language extensions

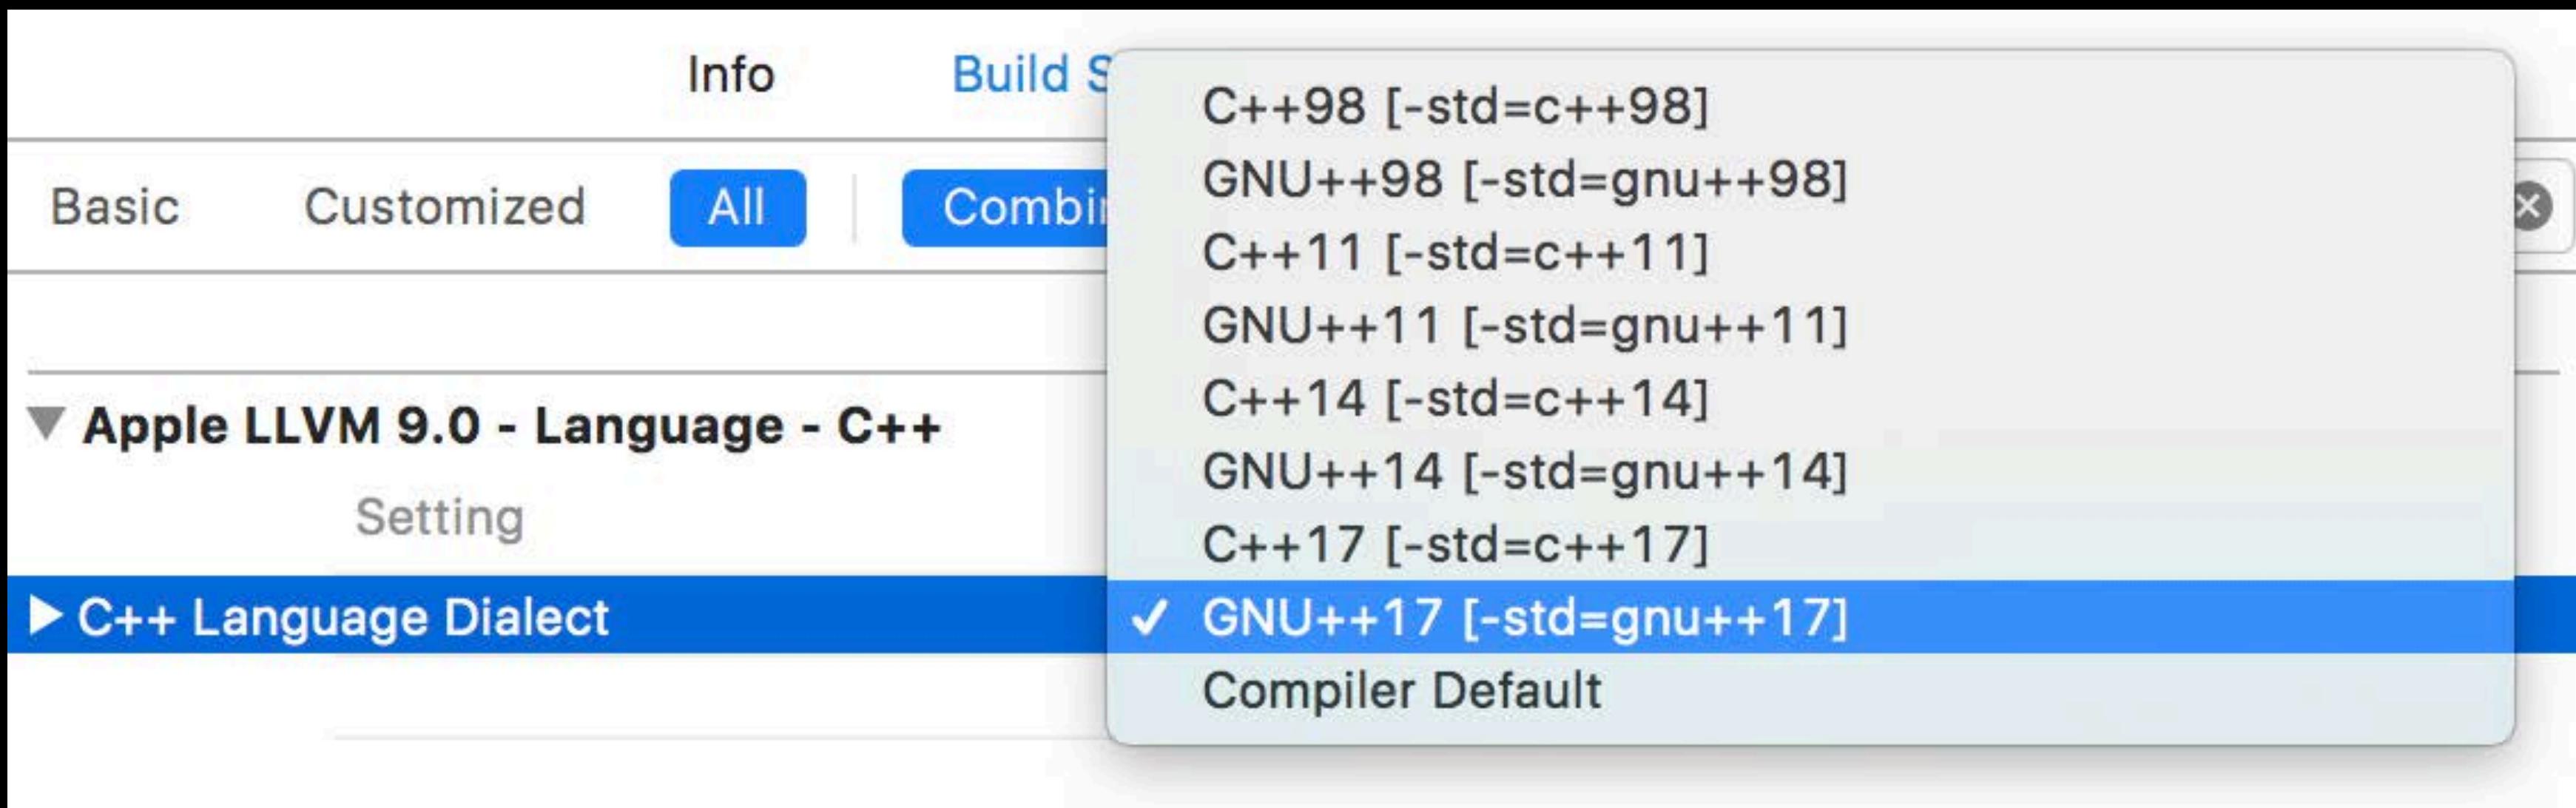

Link-Time Optimization

What Is Link-Time Optimization (LTO)?

What Is Link-Time Optimization (LTO)?

Upgrade runtime performance by optimizing across source files

What Is Link-Time Optimization (LTO)?

Upgrade runtime performance by optimizing across source files

Incremental LTO has low overhead and fast incremental builds

What Is Link-Time Optimization (LTO)?

Upgrade runtime performance by optimizing across source files

Incremental LTO has low overhead and fast incremental builds


What Is Link-Time Optimization (LTO)?

Upgrade runtime performance by optimizing across source files

Incremental LTO has low overhead and fast incremental builds

Time for Clean Link of a Large C++ Project


Smaller is better



Time to link the Apple LLVM Compiler with Incremental LTO


Time for Clean Link of a Large C++ Project

Smaller is better

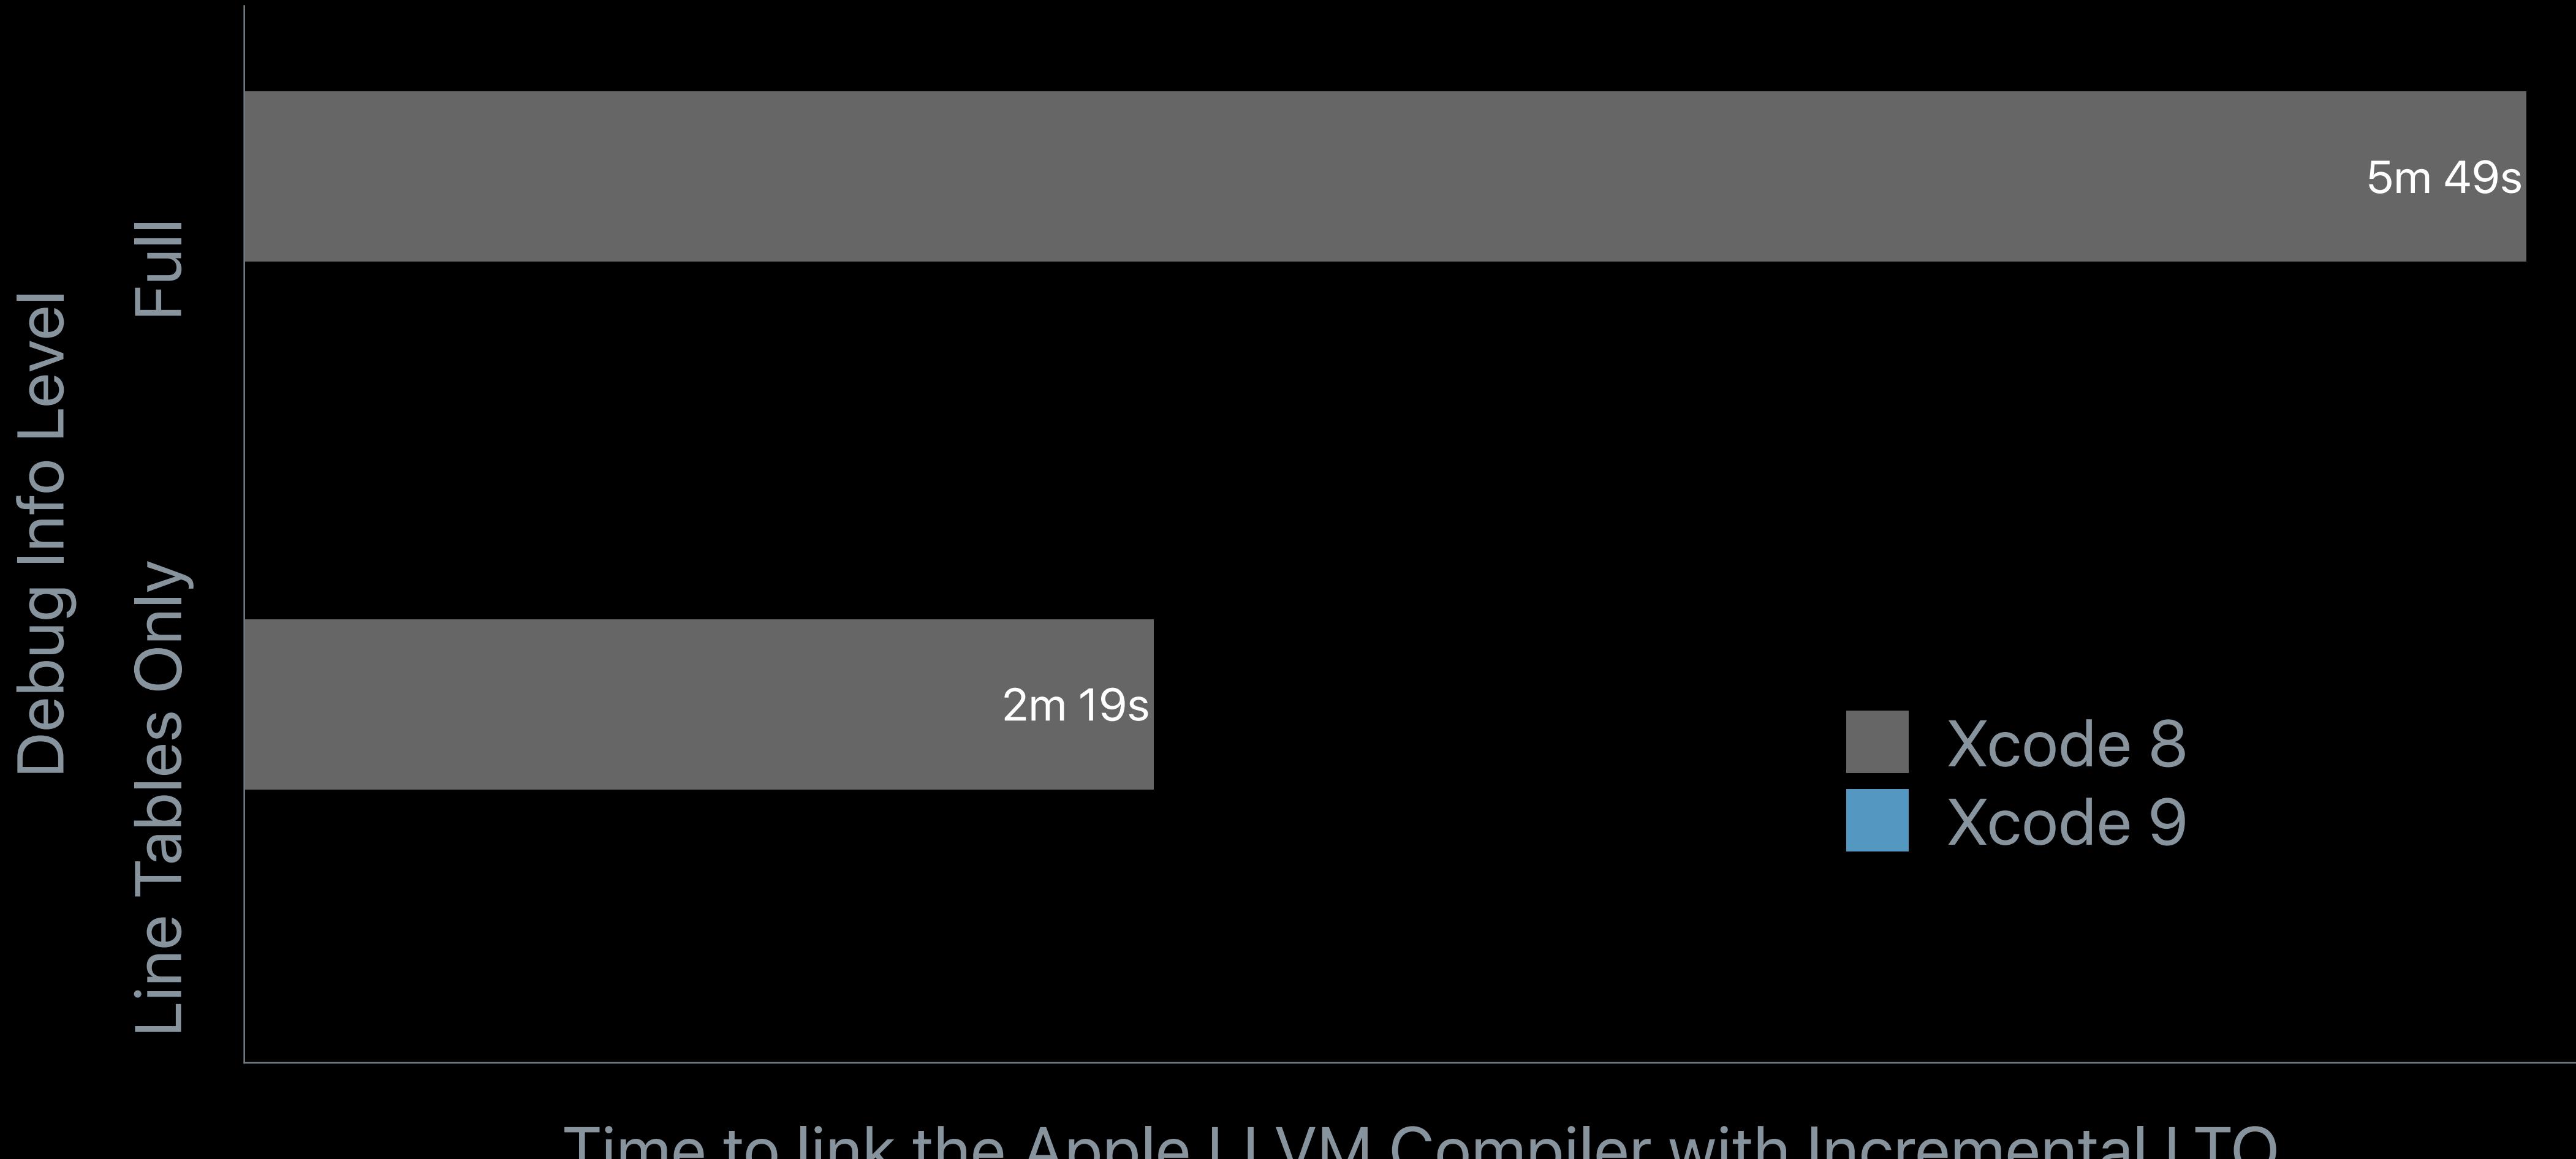

Time for Clean Link of a Large C++ Project


Smaller is better

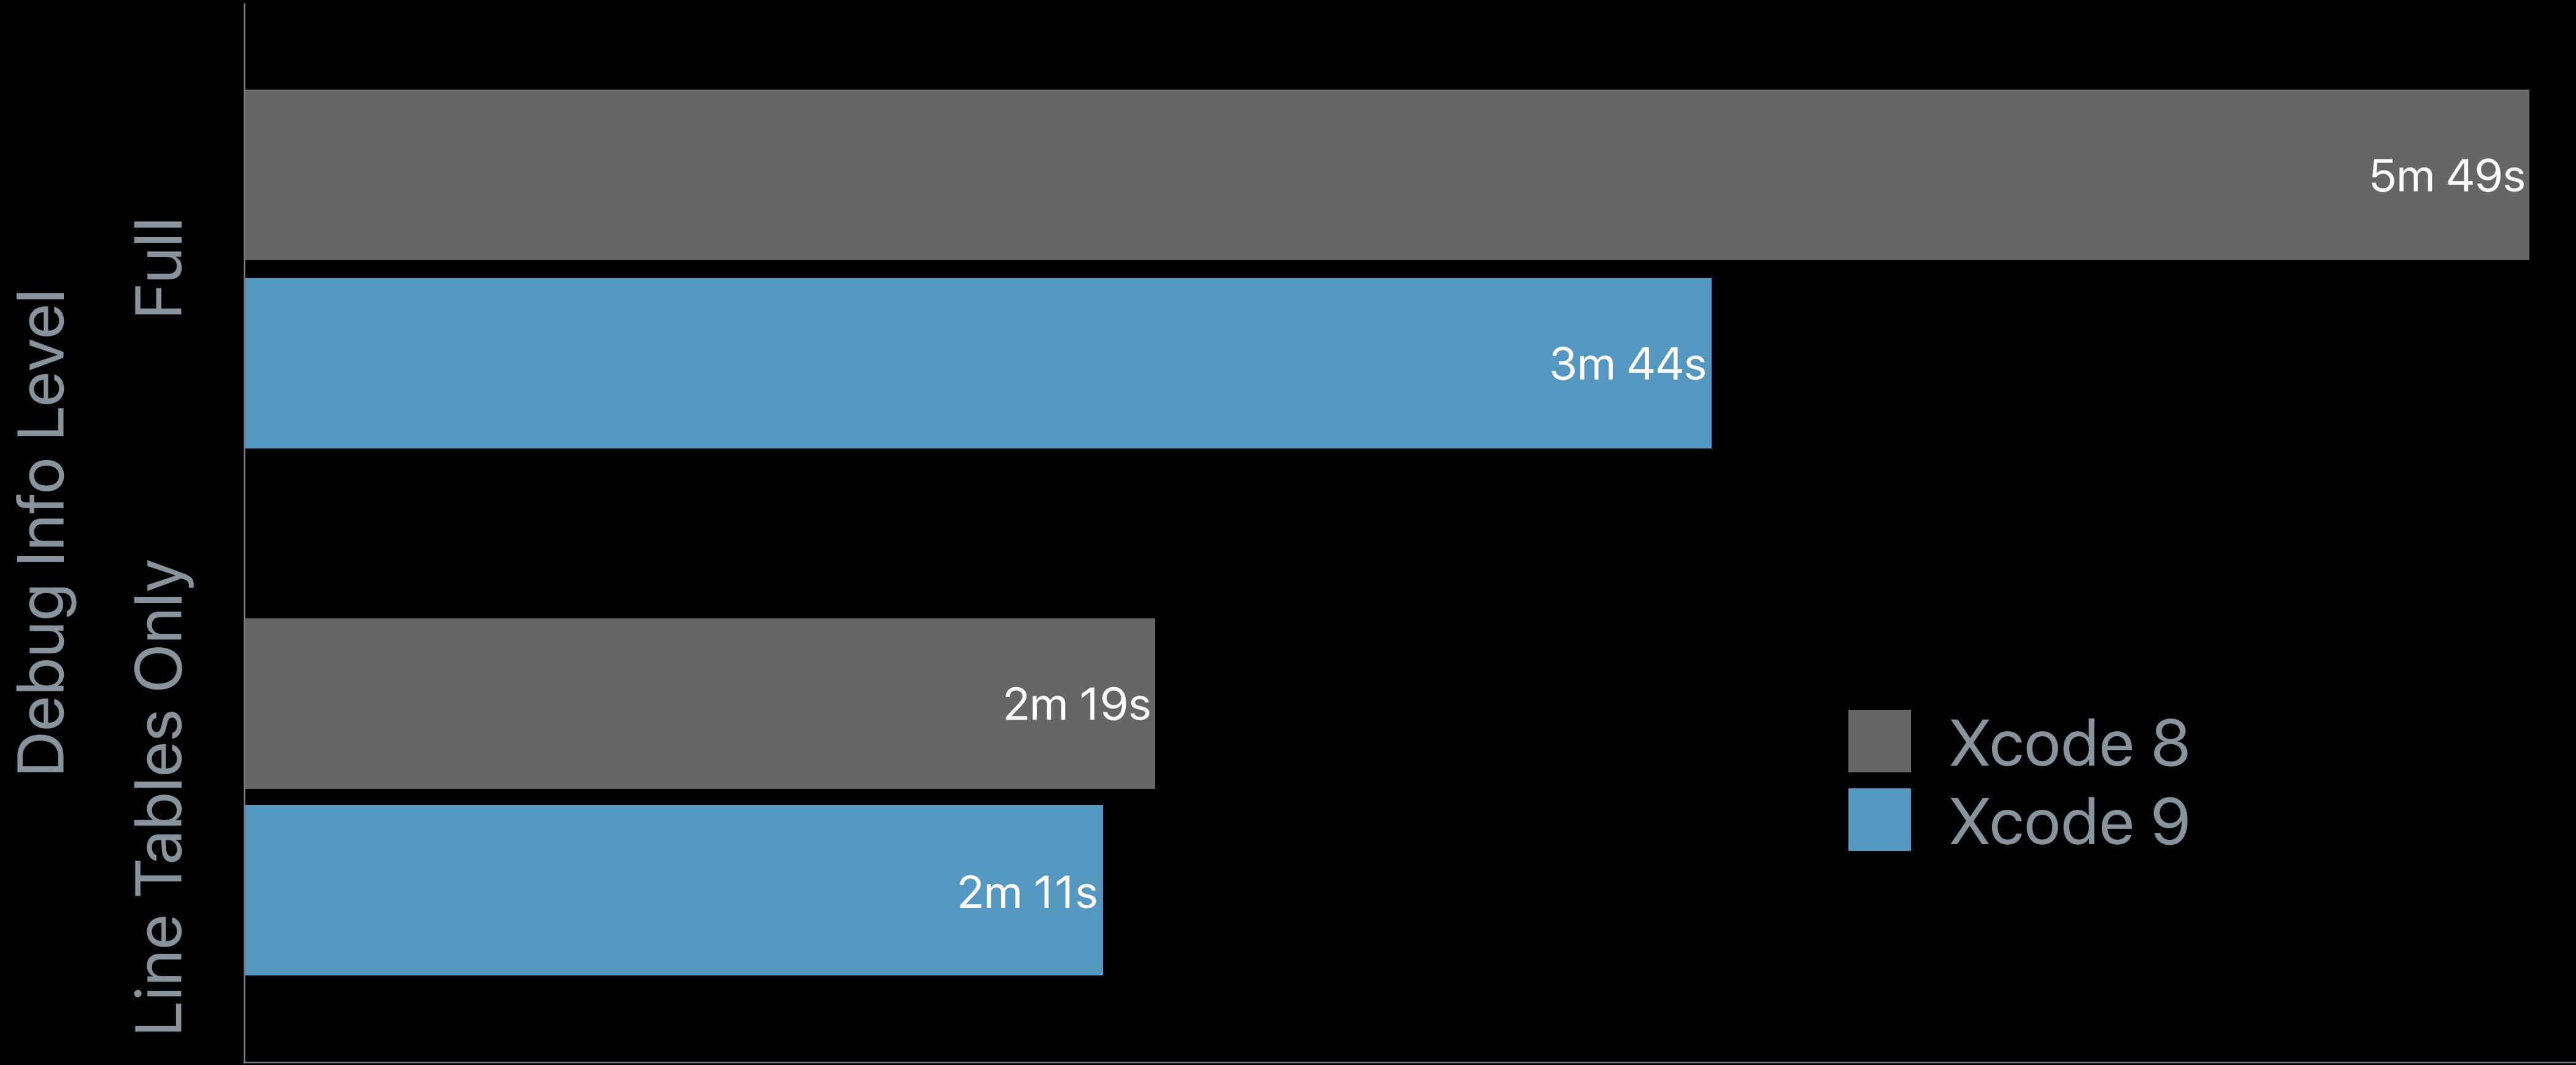

Time to link the Apple LLVM Compiler with Incremental LTO

Time for Incremental Link of a Large C++ Project


Smaller is better



Time to link the Apple LLVM Compiler with Incremental LTO


Time for Incremental Link of a Large C++ Project

Smaller is better

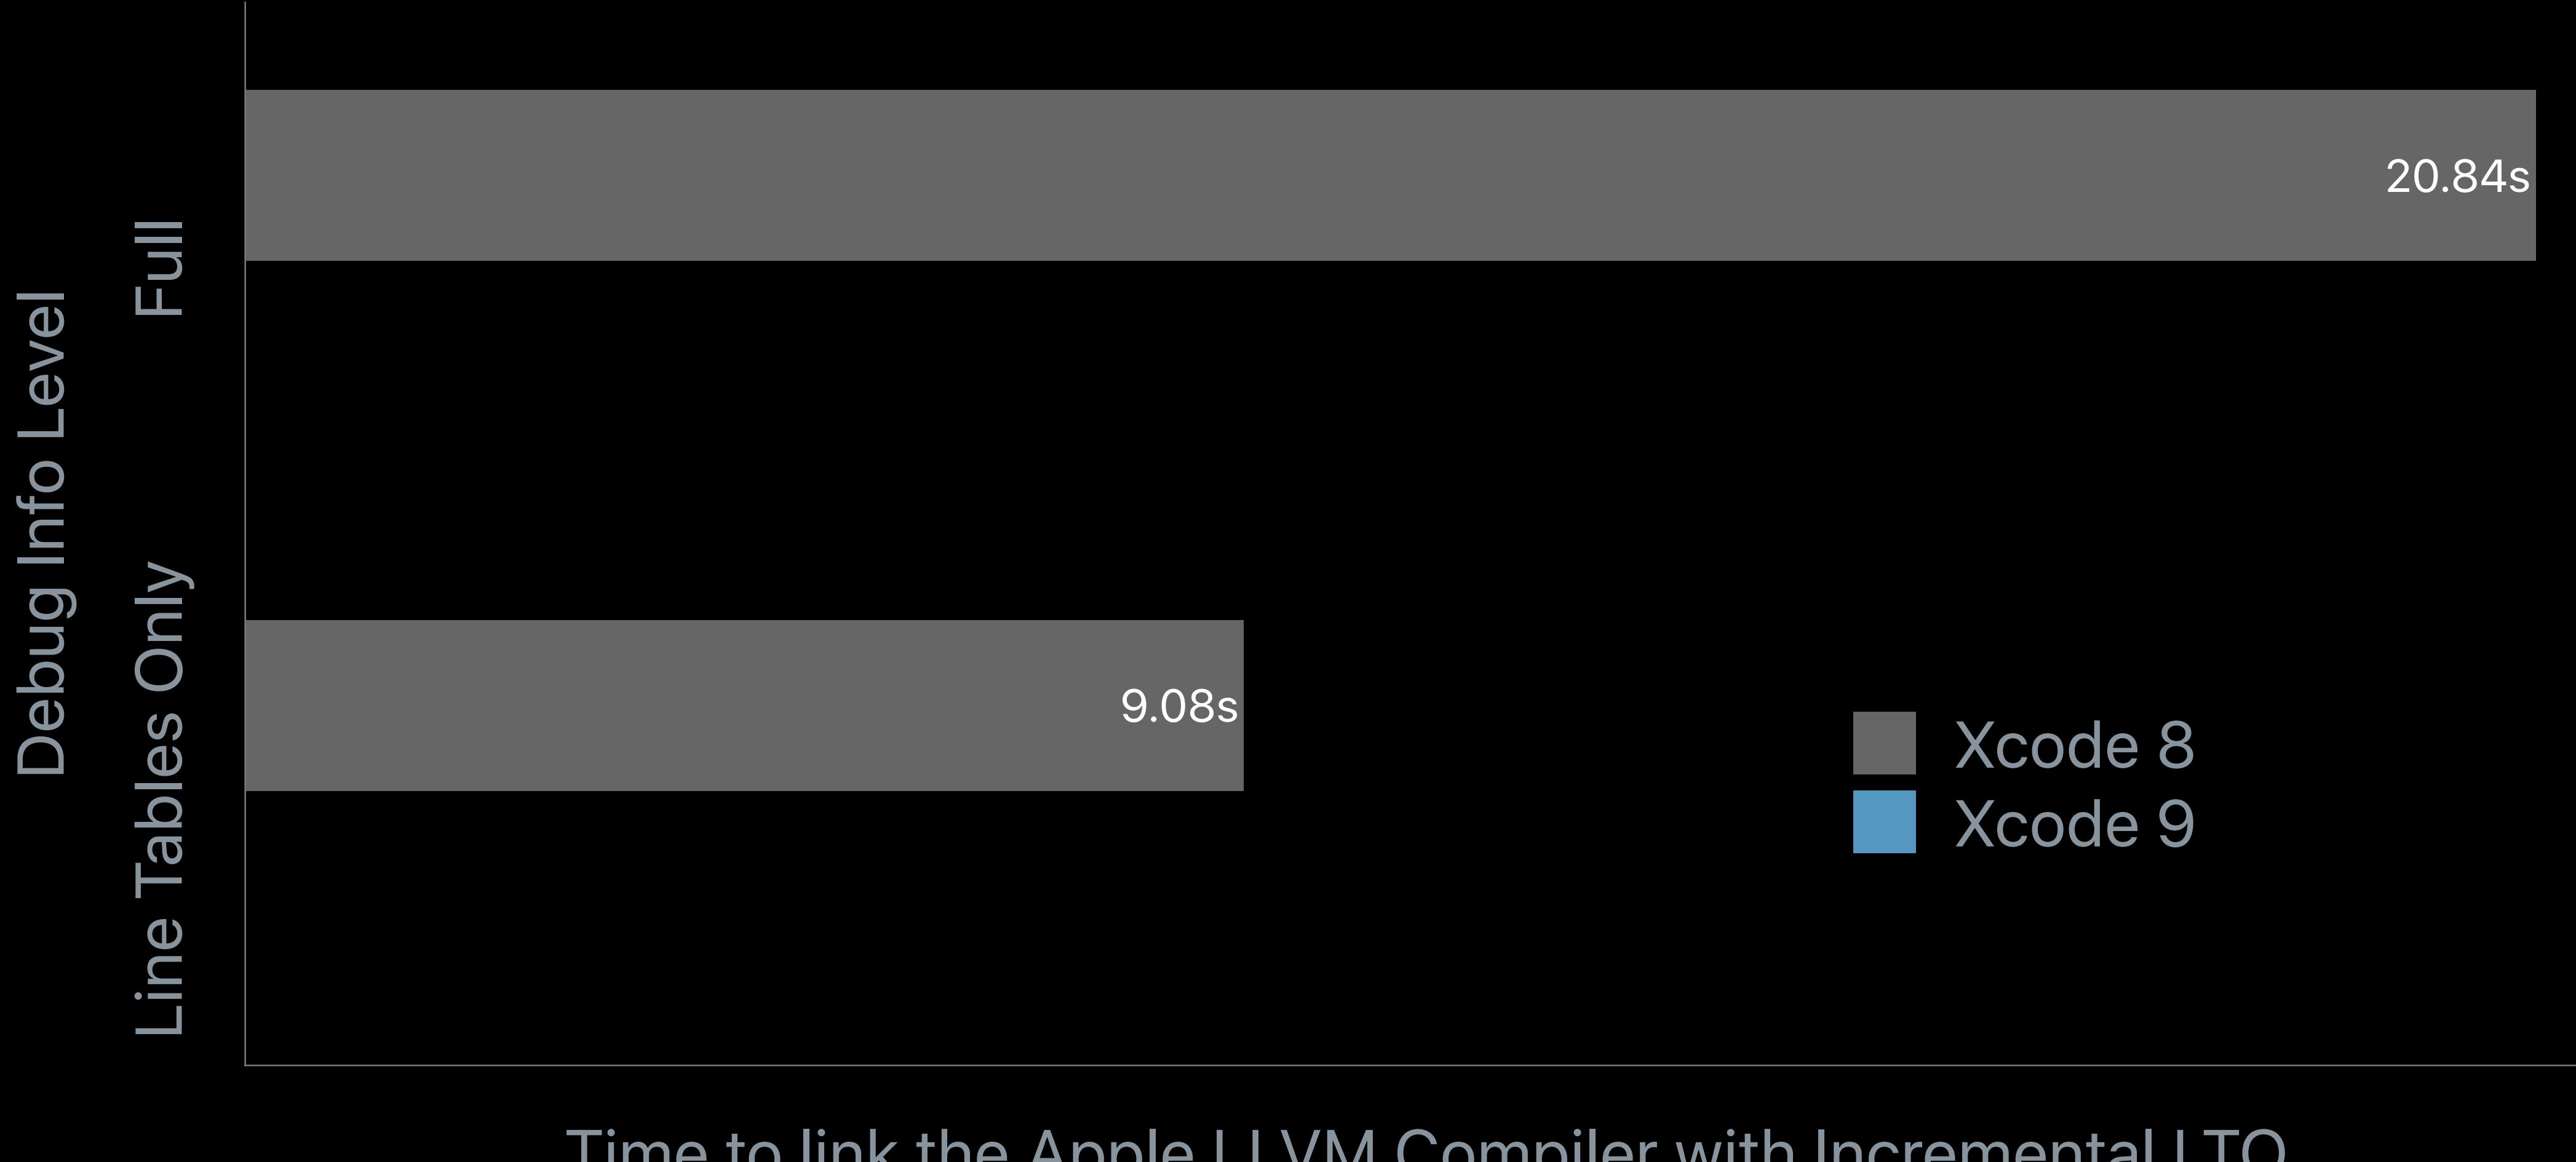


Time for Incremental Link of a Large C++ Project

Smaller is better

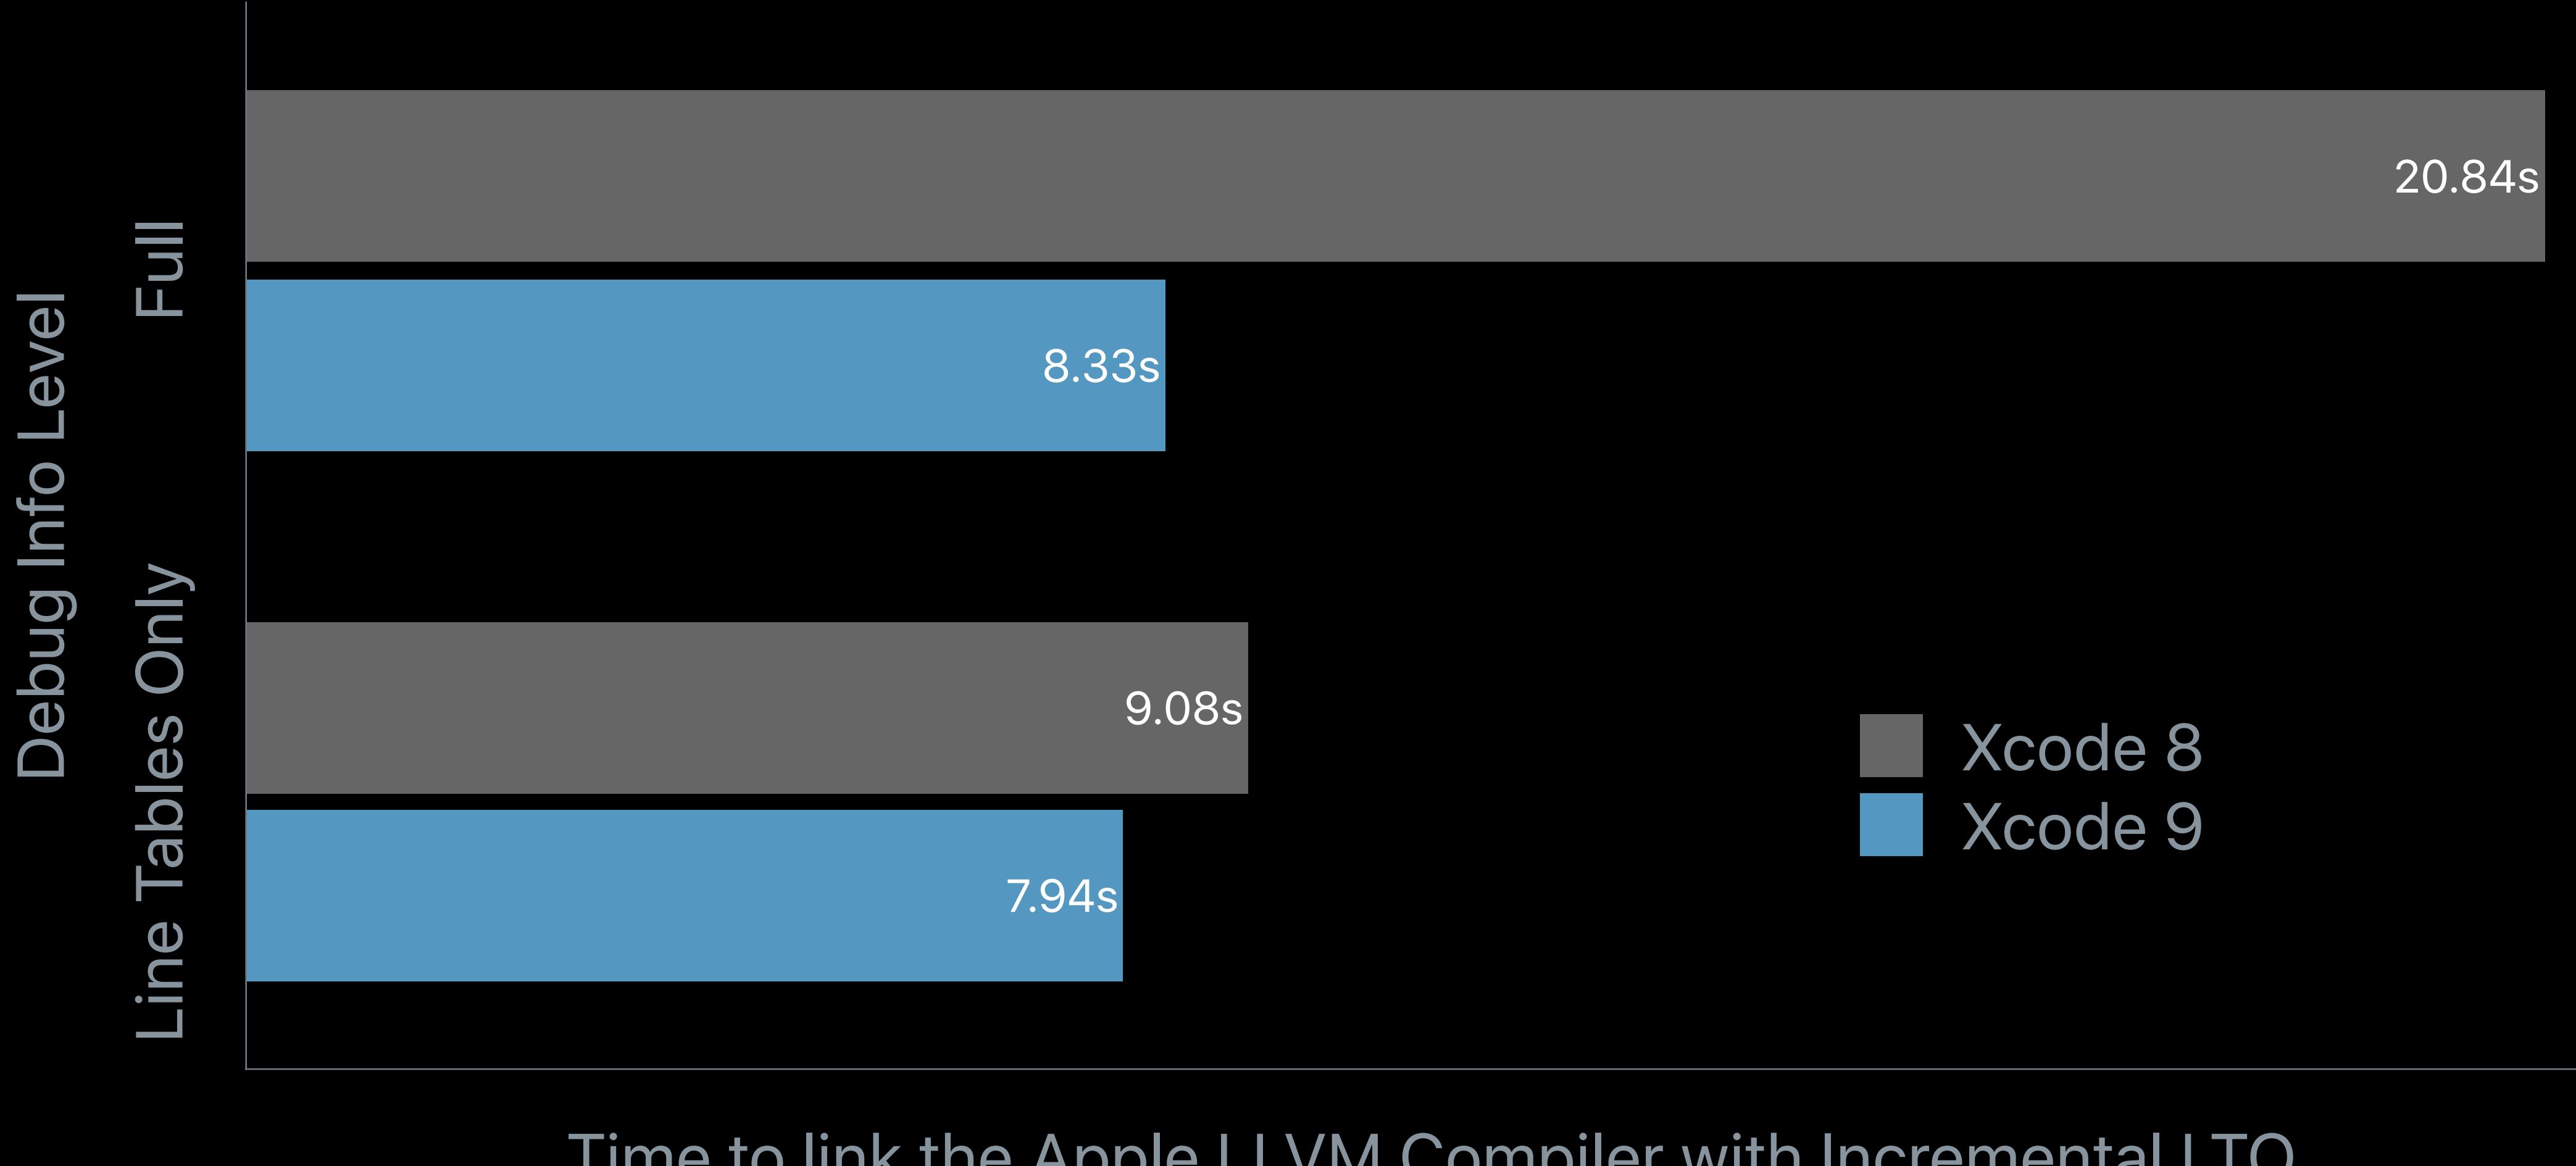

Time for Incremental Link of a Large C++ Project

Smaller is better

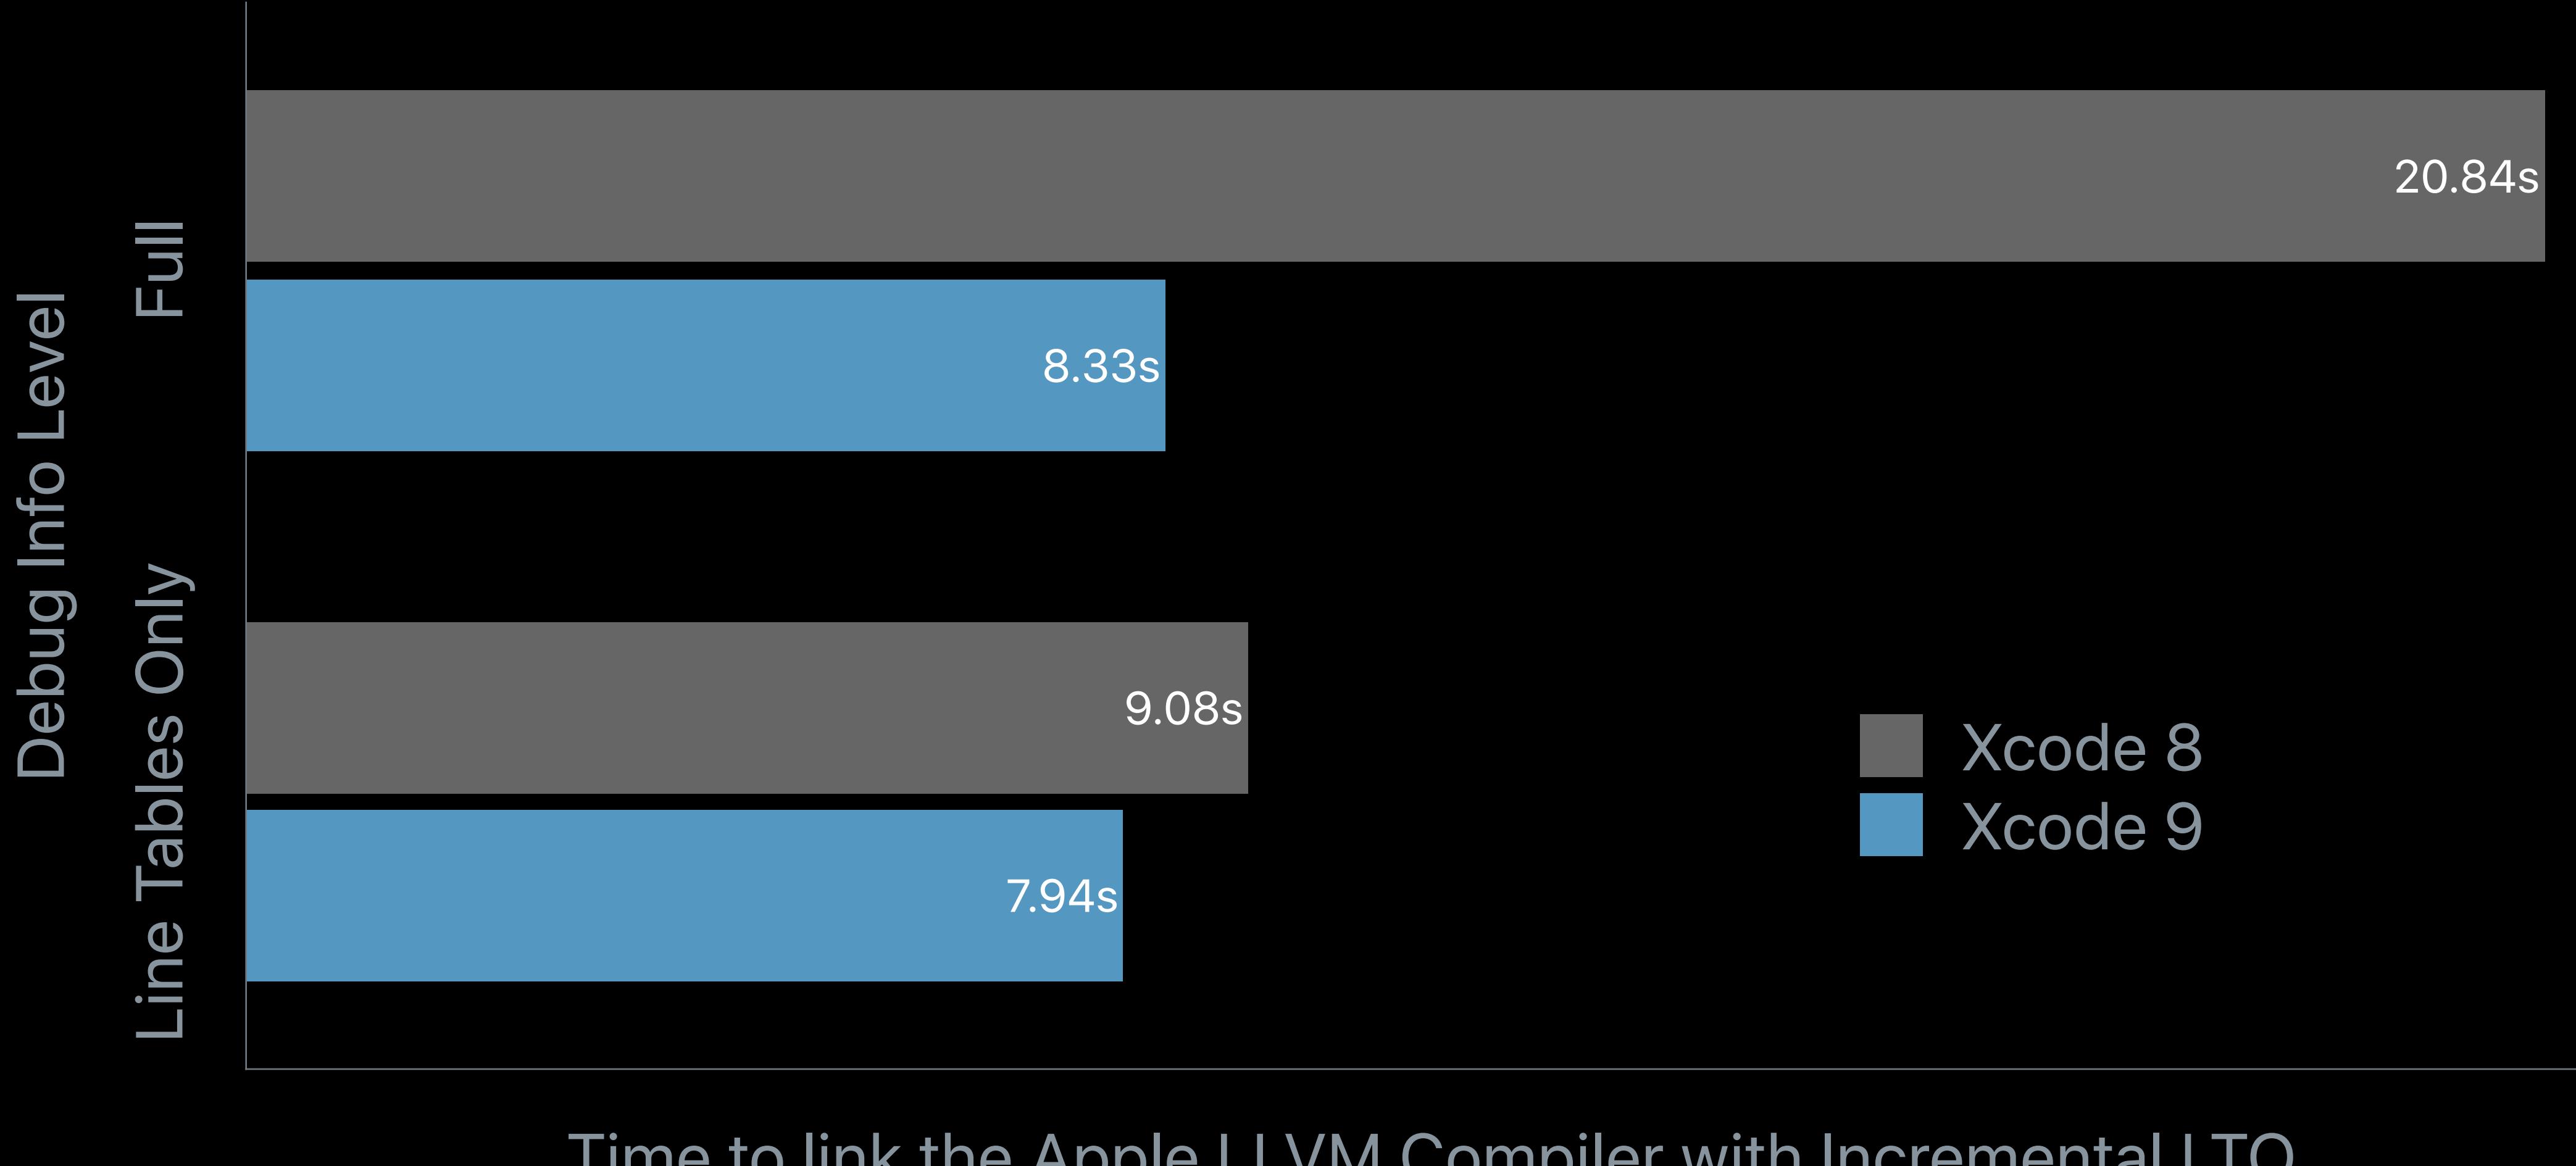


Enable Incremental LTO

Recommendation

Upgrade runtime performance

Low overhead and fast incremental builds

Now recommended even with full debug info

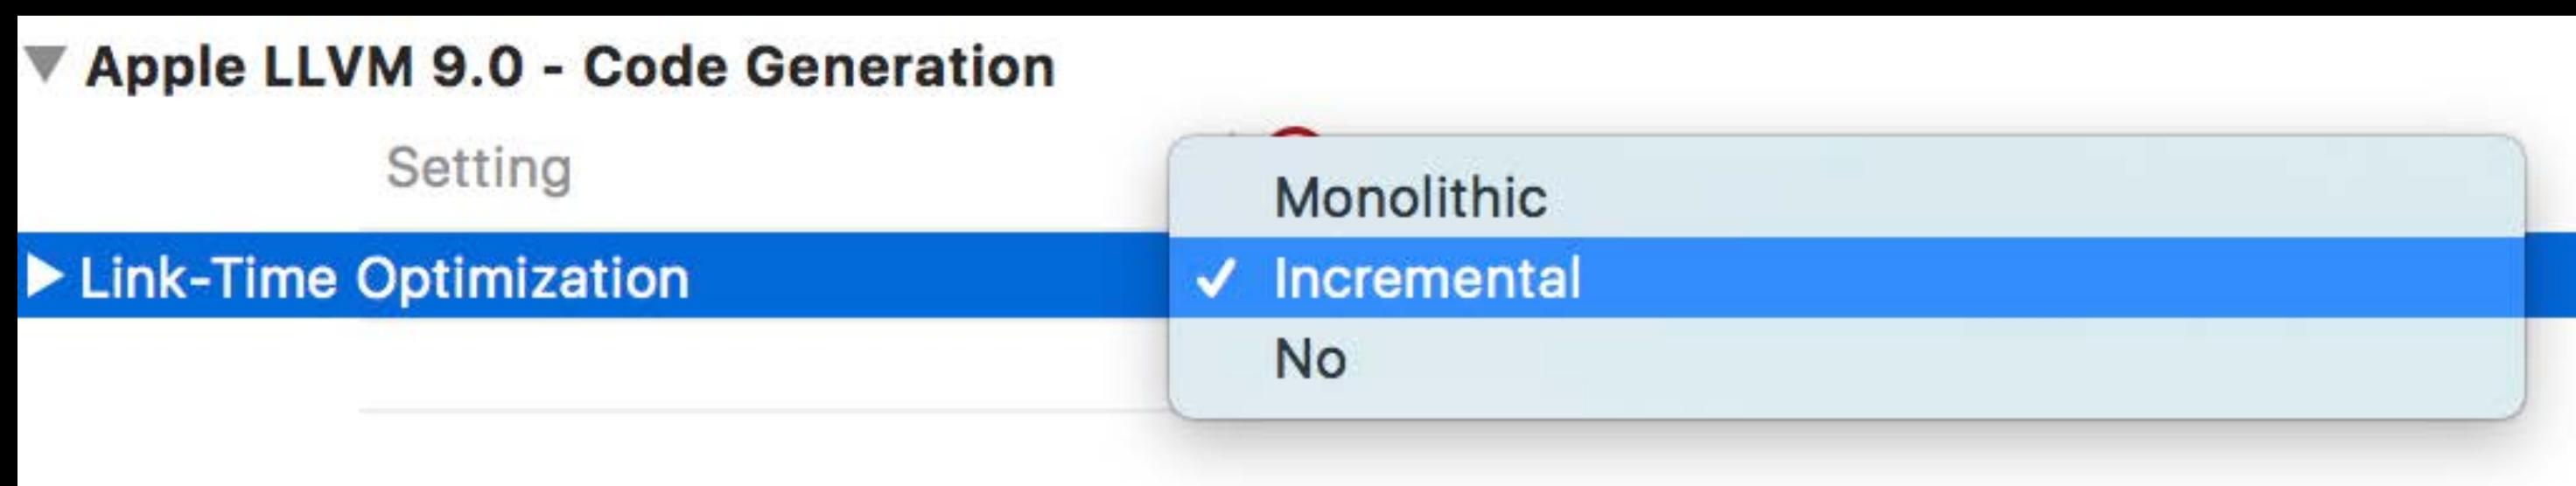

Summary

Use `@available` to check for API availability

Run the static analyzer while you build

Use Xcode to refactor your code

Try out C++17

Enable Incremental LTO

More Information

<https://developer.apple.com/wwdc17/411>

Related Sessions

What's New in Swift

WWDC 2017

Modernizing Grand Central Dispatch Usage

WWDC 2017

Finding Bugs Using Xcode Runtime Tools

WWDC 2017

Understanding Undefined Behavior

WWDC 2017

App Startup Time: Past, Present, and Future

Hall 2

Friday 10:00AM

Labs

LLVM Compiler, Objective-C, and C++ Lab

Technology Lab E

Friday 9:00AM–11:00AM

Xcode Open Hours

Technology Lab K

Friday 1:50PM–4:00PM

WWDC17