


OpenStack Block Storage Service

API v2 Reference

API v2 (April 21, 2014)

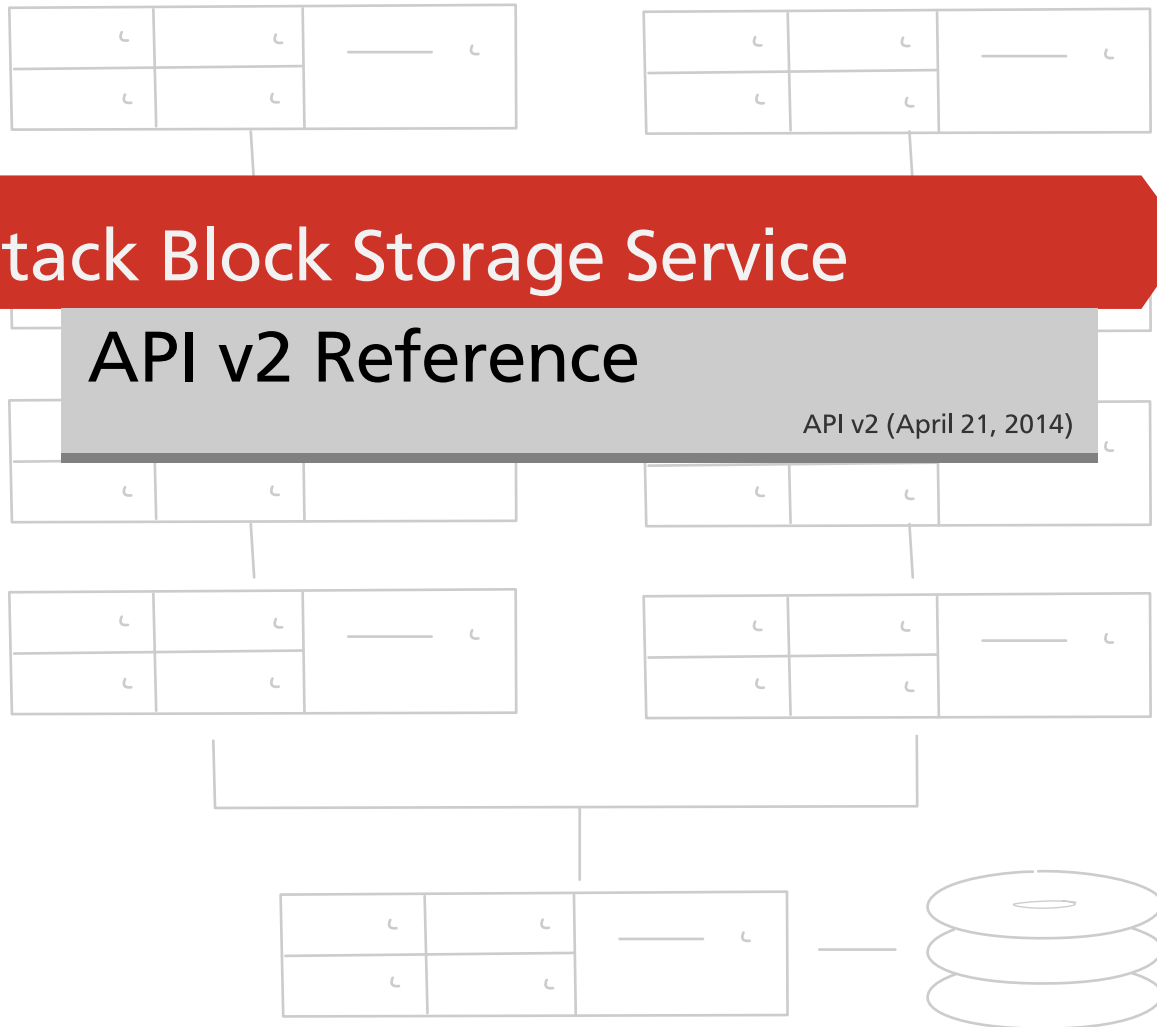

OpenStack Block Storage Service API v2 Reference

API v2 (2014-04-21)

Copyright © 2013, 2014 OpenStack Foundation All rights reserved.

This document is for software developers who develop applications by using the OpenStack Block Storage Service Application Programming Interface (API).

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Table of Contents

| | |
|----------------------------------|----|
| Preface | 6 |
| Intended audience | 6 |
| Additional resources | 6 |
| 1. Overview | 1 |
| Glossary | 2 |
| High-level task flow | 3 |
| 2. General API information | 4 |
| Authentication | 4 |
| Request and response types | 5 |
| Limits | 5 |
| Date and time format | 6 |
| Faults | 6 |
| 3. API operations | 9 |
| Volumes | 9 |
| Snapshots | 21 |
| Volume types | 32 |
| Backups extension | 34 |

List of Tables

| | |
|-----------------------------------|---|
| 2.1. Response formats | 5 |
| 2.2. Absolute limits | 6 |
| 2.3. Date time format codes | 6 |

List of Examples

| | |
|---|----|
| 2.1. Request with headers: Get volume types | 5 |
| 2.2. Response with headers | 5 |
| 2.3. DB service date and time format | 6 |
| 2.4. Example instanceFault response: XML | 7 |
| 2.5. Example fault response: JSON | 7 |
| 2.6. Example badRequest fault on volume size errors: XML | 8 |
| 2.7. Example badRequest fault on volume size errors: JSON | 8 |
| 2.8. Example itemNotFound fault: XML | 8 |
| 2.9. Example itemNotFound fault: JSON | 8 |
| 3.1. Create volume: JSON request | 10 |
| 3.2. Create volume: XML request | 10 |
| 3.3. Create volume: JSON response | 10 |
| 3.4. Create volume: XML response | 11 |
| 3.5. List volumes: XML response | 12 |
| 3.6. List volumes: JSON response | 12 |
| 3.7. List volumes (detailed): XML response | 14 |
| 3.8. List volumes (detailed): JSON response | 15 |
| 3.9. Show volume information: XML response | 17 |
| 3.10. Show volume information: JSON response | 17 |
| 3.11. Update volume: XML request | 19 |
| 3.12. Update volume: JSON request | 19 |
| 3.13. Update volume: XML response | 19 |
| 3.14. Update volume: JSON response | 20 |
| 3.15. Create snapshot: XML request | 22 |
| 3.16. Create snapshot: JSON request | 22 |
| 3.17. Create snapshot: XML response | 23 |
| 3.18. Create snapshot: JSON response | 23 |
| 3.19. List snapshots: XML response | 24 |
| 3.20. List snapshots: JSON response | 24 |
| 3.21. List snapshots (detailed): XML response | 26 |
| 3.22. List snapshots (detailed): JSON response | 26 |
| 3.23. Show snapshot information: XML response | 28 |
| 3.24. Show snapshot information: JSON response | 28 |
| 3.25. Update snapshot: XML request | 30 |
| 3.26. Update snapshot: JSON request | 30 |
| 3.27. Update snapshot: XML response | 30 |
| 3.28. Update snapshot: JSON response | 31 |
| 3.29. List volume types: XML response | 33 |
| 3.30. List volume types: JSON response | 33 |
| 3.31. Show volume type information: JSON response | 34 |
| 3.32. Show volume type information: XML response | 34 |
| 3.33. Create backup: JSON request | 36 |
| 3.34. Create backup: JSON response | 36 |
| 3.35. List backups: JSON response | 37 |
| 3.36. List backups (detailed): JSON response | 39 |
| 3.37. Show backup details: JSON response | 41 |
| 3.38. Restore backup: JSON request | 43 |
| 3.39. Restore backup: JSON response | 43 |

Preface

| | |
|----------------------------|---|
| Intended audience | 6 |
| Additional resources | 6 |

OpenStack Block Storage provides volume management with the OpenStack Compute service.

This document describes the features available with the Block Storage API v2.0.

We welcome feedback, comments and bug reports at bugs.launchpad.net/Cinder.

Intended audience

This guide assists software developers who develop applications by using the Block Storage API v2.0. It assumes the reader has a general understanding of storage and is familiar with:

- ReSTful web services
- HTTP/1.1 conventions
- JSON and/or XML data serialization formats

Additional resources

You can download the latest API-related documents from docs.openstack.org/api/.

This API uses standard HTTP 1.1 response codes as documented at: www.w3.org/Protocols/rfc2616/rfc2616-sec10.html.

1. Overview

| | |
|----------------------------|---|
| Glossary | 2 |
| High-level task flow | 3 |

OpenStack Block Storage Service is a block-level storage solution that enables you to:

- Mount drives to OpenStack Cloud Servers™ to scale storage without paying for more compute resources.
- Use high performance storage to serve database or I/O-intensive applications.

You interact with Block Storage programmatically through the Block Storage API as described in this guide.



Note

- OpenStack Block Storage Service is an add-on feature to OpenStack Nova Compute in Folsom versions and earlier.
- Block Storage is multi-tenant rather than dedicated.
- Block Storage allows you to create snapshots that you can save, list, and restore.
- Block Storage allows you to create backups of your volumes to Object Storage for archival and disaster recovery purposes. These backups can be subsequently restored to the same volume or new volumes.

Glossary

To use the Block Storage API effectively, you must understand several key concepts:

- **Volume**

A detachable block storage device. You can think of it as a USB hard drive. It can only be attached to one instance at a time.

- **Volume type**

A type of a block storage volume. You can define whatever types work best for you, such as SATA, SCSCI, SSD, etc. These can be customized or defined by the OpenStack admin.

You can also define `extra_specs` associated with your volume types. For instance, you could have a `VolumeType=SATA`, with `extra_specs (RPM=10000, RAID-Level=5)`. `Extra_specs` are defined and customized by the admin.

- **Snapshot**

A point in time copy of the data contained in a volume.

- **Instance**

A virtual machine (VM) that runs inside the cloud.

- **Backup**

A full copy of a volume stored in an external service. The service can be configured. The only supported service for now is Object Storage. A backup can subsequently be restored from the external service to either the same volume that the backup was originally taken from, or to a new volume.

High-level task flow

Procedure 1.1. To create and attach a volume

1. You create a volume.

For example, you might create a 30 GB volume called `vol1`, as follows:

```
$ cinder create --display-name vol1 30
```

The command returns the `521752a6-acf6-4b2d-bc7a-119f9148cd8c` volume ID.

2. You attach that volume to a virtual machine (VM) with the `616fb98f-46ca-475e-917e-2563e5a8cd19` ID, as follows:

For example:

```
$ nova volume-attach 616fb98f-46ca-475e-917e-2563e5a8cd19 521752a6-acf6-4b2d-bc7a-119f9148cd8c /dev/vdb
```

2. General API information

| | |
|----------------------------------|---|
| Authentication | 4 |
| Request and response types | 5 |
| Limits | 5 |
| Date and time format | 6 |
| Faults | 6 |

The Block Storage API is implemented using a ReSTful web service interface. Like other OpenStack projects, Block Storage shares a common token-based authentication system that allows access between products and services.



Note

All requests to authenticate against and operate the service are performed using SSL over HTTP (HTTPS) on TCP port 443.

Authentication

You can use [cURL](#) to try the authentication process in two steps: get a token, and send the token to a service.

1. Get an authentication token by providing your user name and either your API key or your password. Here are examples of both approaches:

You can request a token by providing your user name and your password.

```
$ curl -X POST https://localhost:5000/v2.0/tokens -d '{"auth":  
{"passwordCredentials":{"username": "joecool", "password": "coolword"},  
"tenantId": "5"}}' -H 'Content-type: application/json'
```

Successful authentication returns a token which you can use as evidence that your identity has already been authenticated. To use the token, pass it to other services as an `X-Auth-Token` header.

Authentication also returns a service catalog, listing the endpoints you can use for Cloud services.

2. Use the authentication token to send a GET to a service you would like to use.

Authentication tokens are typically valid for 24 hours. Applications should be designed to re-authenticate after receiving a 401 (Unauthorized) response from a service endpoint.



Important

If you programmatically parse an authentication response, be aware that service names are stable for the life of the particular service and can be used as keys. You should also be aware that a user's service catalog can include multiple uniquely-named services that perform similar functions.

Request and response types

The Block Storage API supports both the JSON and XML data serialization formats. The request format is specified using the `Content-Type` header and is required for calls that have a request body. The response format can be specified in requests either by using the `Accept` header or by adding an `.xml` or `.json` extension to the request URI. Note that it is possible for a response to be serialized using a format different from the request. If no response format is specified, JSON is the default. If conflicting formats are specified using both an `Accept` header and a query extension, the query extension takes precedence.

Table 2.1. Response formats

| Format | Accept Header | Query Extension | Default |
|--------|------------------|-----------------|---------|
| JSON | application/json | .json | Yes |
| XML | application/xml | .xml | No |

In the request example below, notice that `Content-Type` is set to `application/json`, but `application/xml` is requested via the `Accept` header:

Example 2.1. Request with headers: Get volume types

```
GET /v2/441446/types HTTP/1.1
Host: dfw.blockstorage.api.openstackcloud.com
X-Auth-Token: eaaafd18-0fed-4b3a-81b4-663c99ec1cbb
Accept: application/xml
```

An XML response format is returned:

Example 2.2. Response with headers

```
HTTP/1.1 200 OK
Date: Fri, 20 Jul 2012 20:32:13 GMT
Content-Length: 187
Content-Type: application/xml
X-Compute-Request-Id: req-8e0295cd-a283-46e4-96da-cae05cbfd1c7

<?xml version='1.0' encoding='UTF-8'?>
  <volume_types>
    <volume_type id="1" name="SATA">
      <extra_specs/>
    </volume_type>
    <volume_type id="2" name="SSD">
      <extra_specs/>
    </volume_type>
  </volume_types>
```

Limits

All accounts, by default, have a preconfigured set of thresholds (or limits) to manage capacity and prevent abuse of the system. The system recognizes two kinds of limits: *rate limits* and *absolute limits*. Rate limits are thresholds that are reset after a certain amount of time passes. Absolute limits are fixed.

Absolute limits

The following table shows the absolute limits:

Table 2.2. Absolute limits

| Name | Description | Limit |
|---------------|---------------------------------|-------|
| Block Storage | Maximum amount of block storage | 1 TB |

Date and time format

The Block Storage Service uses an ISO-8601 compliant date format for the display and consumption of date time values.

Example 2.3. DB service date and time format

```
yyyy-MM-dd 'T' HH:mm:ss .SSSZ
```

May 19th, 2011 at 8:07:08 AM, GMT-5 has the following format:

```
2011-05-19T08:07:08-05:00
```

The following table describes the date time format codes:

Table 2.3. Date time format codes

| Code | Description |
|------|--|
| yyyy | Four digit year |
| MM | Two digit month |
| dd | Two digit day of month |
| T | Separator for date time |
| HH | Two digit hour of day (00-23) |
| mm | Two digit minutes of hour |
| ss | Two digit seconds of the minute |
| SSS | Three digit milliseconds of the second |
| Z | RFC-822 timezone |

Faults

When an error occurs, the Block Storage Service returns a fault object containing an HTTP error response code that denotes the type of error. The response body returns additional information about the fault.

The following table lists possible fault types with their associated error codes and descriptions.

| Fault type | Associated error code | Description |
|--------------|-----------------------|---|
| badRequest | 400 | The user request contains one or more errors. |
| unauthorized | 401 | The supplied token is not authorized to access the resources, either it's expired or invalid. |
| forbidden | 403 | Access to the requested resource was denied. |

| Fault type | Associated error code | Description |
|---------------------|-----------------------|--|
| itemNotFound | 404 | The back-end services did not find anything matching the Request-URI. |
| badMethod | 405 | The request method is not allowed for this resource. |
| overLimit | 413 | Either the number of entities in the request is larger than allowed limits, or the user has exceeded allowable request rate limits. See the <code>details</code> element for more specifics. Contact support if you think you need higher request rate limits. |
| badMediaType | 415 | The requested content type is not supported by this service. |
| unprocessableEntity | 422 | The requested resource could not be processed on at the moment. |
| instanceFault | 500 | This is a generic server error and the message contains the reason for the error. This error could wrap several error messages and is a catch all. |
| notImplemented | 501 | The requested method or resource is not implemented. |
| serviceUnavailable | 503 | The Block Storage Service is not available. |

The following two `instanceFault` examples show errors when the server has erred or cannot perform the requested operation:

Example 2.4. Example `instanceFault` response: XML

```
HTTP/1.1 500 Internal Server Error
Content-Type: application/xml
Content-Length: 121
Date: Mon, 28 Nov 2011 18:19:37 GMT
```

```
<?xml version="1.0" encoding="UTF-8"?>
<instanceFault code="500"
  xmlns="http://docs.openstack.org/openstack-block-storage/2.0/content">
  <message> The server has either erred or is incapable of
    performing the requested operation. </message>
</instanceFault>
```

Example 2.5. Example fault response: JSON

```
HTTP/1.1 500 Internal Server Error
Content-Length: 120
Content-Type: application/json; charset=UTF-8
Date: Tue, 29 Nov 2011 00:33:48 GMT
```

```
{
  "instanceFault": {
    "code": 500,
    "message": "The server has either erred or is incapable of performing the
requested operation."
  }
}
```

The error code (`code`) is returned in the body of the response for convenience. The `message` element returns a human-readable message that is appropriate for display to the end user. The `details` element is optional and may contain information that is useful for tracking down an error, such as a stack trace. The `details` element may or may not be appropriate for display to an end user, depending on the role and experience of the end user.

The fault's root element (for example, `instanceFault`) may change depending on the type of error.

The following two `badRequest` examples show errors when the volume size is invalid:

Example 2.6. Example `badRequest` fault on volume size errors: XML

```
HTTP/1.1 400 None
Content-Type: application/xml
Content-Length: 121
Date: Mon, 28 Nov 2011 18:19:37 GMT

<?xml version="1.0" encoding="UTF-8"?>
<badRequest code="400"
  xmlns="http://docs.openstack.org/openstack-block-storage/2.0/content">
  <message> Volume 'size' needs to be a positive integer value, -1.0
    cannot be accepted. </message>
</badRequest>
```

Example 2.7. Example `badRequest` fault on volume size errors: JSON

```
HTTP/1.1 400 None
Content-Length: 120
Content-Type: application/json; charset=UTF-8
Date: Tue, 29 Nov 2011 00:33:48 GMT

{
  "badRequest": {
    "code": 400,
    "message": "Volume 'size' needs to be a positive integer value, -1.0
      cannot be accepted."
  }
}
```

The next two examples show `itemNotFound` errors:

Example 2.8. Example `itemNotFound` fault: XML

```
HTTP/1.1 404 Not Found
Content-Length: 147
Content-Type: application/xml; charset=UTF-8
Date: Mon, 28 Nov 2011 19:50:15 GMT

<?xml version="1.0" encoding="UTF-8"?>
<itemNotFound code="404"
  xmlns="http://docs.openstack.org/api/openstack-block-storage/2.0/content">
  <message> The resource could not be found. </message>
</itemNotFound>
```

Example 2.9. Example `itemNotFound` fault: JSON

```
HTTP/1.1 404 Not Found
Content-Length: 78
Content-Type: application/json; charset=UTF-8
Date: Tue, 29 Nov 2011 00:35:24 GMT

{
  "itemNotFound": {
    "code": 404,
    "message": "The resource could not be found."
  }
}
```

3. API operations

| | |
|-------------------------|----|
| Volumes | 9 |
| Snapshots | 21 |
| Volume types | 32 |
| Backups extension | 34 |

Volumes

A volume is a detachable block storage device. You can think of it as a USB hard drive. You can attach a volume to one instance at a time.

When you create, list, or delete volumes, these status values are possible:

| Status | Description |
|------------------|--|
| creating | The volume is being created. |
| available | The volume is ready to be attached to an instance. |
| attaching | The volume is attaching to an instance. |
| in-use | The volume is attached to an instance. |
| deleting | The volume is being deleted. |
| error | An error occurred during volume creation. |
| error_deleting | An error occurred during volume deletion. |
| backing-up | The volume is being backed up. |
| restoring-backup | A backup is being restored to the volume. |
| error_restoring | An error occurred during backup restoration to a volume. |

| Method | URI | Description |
|---------------|---|--|
| POST | /v2/{tenant_id}/volumes | Creates a volume. |
| GET | /v2/{tenant_id}/volumes | Lists summary information for all Block Storage volumes that the tenant who submits the request can access. |
| GET | /v2/{tenant_id}/volumes/detail | Lists detailed information for all Block Storage volumes that the tenant who submits the request can access. |
| GET | /v2/{tenant_id}/volumes/{volume_id} | Shows information about a specified volume. |
| PUT | /v2/{tenant_id}/volumes/{volume_id}{?display_description, display_name} | Updates a volume. |
| DELETE | /v2/{tenant_id}/volumes/{volume_id} | Deletes a specified volume. |

Create volume

| Method | URI | Description |
|--------|-------------------------|-------------------|
| POST | /v2/{tenant_id}/volumes | Creates a volume. |

To create a bootable volume, include the image ID and set the `bootable` flag to `true` in the request body.

Normal response codes: 202

Request

This table shows the URI parameters for the create volume request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |

Example 3.1. Create volume: JSON request

```
{
  "volume": {
    "availability_zone": null,
    "source_volid": null,
    "display_description": null,
    "snapshot_id": null,
    "size": 10,
    "display_name": "my_volume",
    "imageRef": null,
    "volume_type": null,
    "metadata": {
    }
  }
}
```

Example 3.2. Create volume: XML request

```
<?xml version="1.0" encoding="UTF-8"?>
<volume
  xmlns="http://docs.openstack.org/openstack-block-storage/2.0/content"
  display_name="vol-001" display_description="Another volume."
  size="2"/>
```

This operation does not require a request body.

Response

Example 3.3. Create volume: JSON response

```
{
  "volume": {
    "status": "creating",
    "display_name": "my_volume",
    "attachments": [

```



```
    },
    "availability_zone": "nova",
    "bootable": "false",
    "created_at": "2014-02-21T19:52:04.949734",
    "display_description": null,
    "volume_type": "None",
    "snapshot_id": null,
    "source_volid": null,
    "metadata": {
    },
    "id": "93c2e2aa-7744-4fd6-a31a-80c4726b08d7",
    "size": 10
  }
}
```

Example 3.4. Create volume: XML response

```
<?xml version='1.0' encoding='UTF-8'?>
<volume xmlns:atom="http://www.w3.org/2005/Atom"
  xmlns="http://docs.openstack.org/volume/api/v1" status="creating"
  display_name="vol-001" availability_zone="nova" bootable="false"
  created_at="2014-02-21 20:18:33.122452"
  display_description="Another volume." volume_type="None"
  snapshot_id="None" source_volid="None"
  id="83960a54-8dad-4fd8-bc41-33c71e098e04" size="2">
  <attachments/>
  <metadata/>
</volume>
```

This operation does not return a response body.

List volumes

| Method | URI | Description |
|--------|-------------------------|---|
| GET | /v2/{tenant_id}/volumes | Lists summary information for all Block Storage volumes that the tenant who submits the request can access. |

Normal response codes: 200

Request

This table shows the URI parameters for the list volumes request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |

This operation does not require a request body.

Response

Example 3.5. List volumes: XML response

```
<?xml version='1.0' encoding='UTF-8'?>
<volumes xmlns:atom="http://www.w3.org/2005/Atom"
  xmlns="http://docs.openstack.org/api/openstack-block-storage/2.0/content">
  <volume name="vol-004" id="45baf976-c20a-4894-a7c3-c94b7376bf55">
    <attachments/>
    <metadata/>
  </volume>
  <volume name="vol-003" id="5aa119a8-d25b-45a7-8d1b-88e127885635">
    <attachments/>
    <metadata/>
  </volume>
</volumes>
```

Example 3.6. List volumes: JSON response

```
{
  "volumes": [
    {
      "id": "45baf976-c20a-4894-a7c3-c94b7376bf55",
      "links": [
        {
          "href": "http://localhost:8776/v2/0c2eba2c5af04d3f9e9d0d410b371fde/volumes/45baf976-c20a-4894-a7c3-c94b7376bf55",
          "rel": "self"
        },
        {
          "href": "http://localhost:8776/0c2eba2c5af04d3f9e9d0d410b371fde/volumes/45baf976-c20a-4894-a7c3-c94b7376bf55",
          "rel": "bookmark"
        }
      ]
    },
    {
      "name": "vol-004"
    }
  ]
}
```

```
    },  
    {  
      "id": "5aa119a8-d25b-45a7-8d1b-88e127885635",  
      "links": [  
        {  
          "href": "http://localhost:8776/  
v2/0c2eba2c5af04d3f9e9d0d410b371fde/volumes/5aa119a8-  
d25b-45a7-8d1b-88e127885635",  
          "rel": "self"  
        },  
        {  
          "href": "http://localhost:8776/  
0c2eba2c5af04d3f9e9d0d410b371fde/volumes/5aa119a8-  
d25b-45a7-8d1b-88e127885635",  
          "rel": "bookmark"  
        }  
      ],  
      "name": "vol-003"  
    }  
  ]  
}
```

This operation does not return a response body.

List volumes (detailed)

| Method | URI | Description |
|--------|--------------------------------|--|
| GET | /v2/{tenant_id}/volumes/detail | Lists detailed information for all Block Storage volumes that the tenant who submits the request can access. |

Normal response codes: 200

Request

This table shows the URI parameters for the list volumes (detailed) request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |

This operation does not require a request body.

Response

Example 3.7. List volumes (detailed): XML response

```
<?xml version='1.0' encoding='UTF-8'?>
<volumes
  xmlns:os-vol-image-meta="http://docs.openstack.org/openstack-block-
storage/2.0/content/Volume_Image_Metadata.html "
  xmlns:os-vol-tenant-attr="http://docs.openstack.org/openstack-block-
storage/2.0/content/Volume_Tenant_Attribute.html "
  xmlns:os-vol-host-attr="http://docs.openstack.org/openstack-block-storage/
2.0/content/Volume_Host_Attribute.html "
  xmlns:atom="http://www.w3.org/2005/Atom"
  xmlns="http://docs.openstack.org/api/openstack-block-storage/2.0/content">
  <volume status="available" name="vol-004" availability_zone="nova"
    created_at="2013-02-25 06:36:28" description="Another volume."
    volume_type="None" source_volid="None" snapshot_id="None"
    id="45baf976-c20a-4894-a7c3-c94b7376bf55" size="1"
    os-vol-tenant-attr:tenant_id="0c2eba2c5af04d3f9e9d0d410b371fde"
    os-vol-host-attr:host="ip-10-168-107-25">
    <attachments/>
    <metadata>
      <meta key="contents">junk</meta>
    </metadata>
  </volume>
  <volume status="available" name="vol-003" availability_zone="nova"
    created_at="2013-02-25 02:40:21"
    description="This is yet, another volume." volume_type="None"
    source_volid="None" snapshot_id="None"
    id="5aa119a8-d25b-45a7-8d1b-88e127885635" size="1"
    os-vol-tenant-attr:tenant_id="0c2eba2c5af04d3f9e9d0d410b371fde"
    os-vol-host-attr:host="ip-10-168-107-25">
    <attachments/>
    <metadata>
      <meta key="contents">not junk</meta>
    </metadata>
  </volume>
```

```
</volumes>
```

Example 3.8. List volumes (detailed): JSON response

```
{
  "volumes": [
    {
      "status": "available",
      "attachments": [
        ],
      "links": [
        {
          "href": "http://localhost:8776/v2/0c2eba2c5af04d3f9e9d0d410b371fde/volumes/45baf976-c20a-4894-a7c3-c94b7376bf55",
          "rel": "self"
        },
        {
          "href": "http://localhost:8776/0c2eba2c5af04d3f9e9d0d410b371fde/volumes/45baf976-c20a-4894-a7c3-c94b7376bf55",
          "rel": "bookmark"
        }
      ],
      "availability_zone": "nova",
      "os-vol-host-attr:host": "ip-10-168-107-25",
      "source_vol_id": null,
      "snapshot_id": null,
      "id": "45baf976-c20a-4894-a7c3-c94b7376bf55",
      "description": "Another volume.",
      "name": "vol-004",
      "created_at": "2013-02-25T06:36:28.000000",
      "volume_type": "None",
      "os-vol-tenant-attr:tenant_id": "0c2eba2c5af04d3f9e9d0d410b371fde",
      "size": 1,
      "metadata": {
        "contents": "junk"
      }
    },
    {
      "status": "available",
      "attachments": [
        ],
      "links": [
        {
          "href": "http://localhost:8776/v2/0c2eba2c5af04d3f9e9d0d410b371fde/volumes/5aa119a8-d25b-45a7-8d1b-88e127885635",
          "rel": "self"
        },
        {
          "href": "http://localhost:8776/0c2eba2c5af04d3f9e9d0d410b371fde/volumes/5aa119a8-d25b-45a7-8d1b-88e127885635",
          "rel": "bookmark"
        }
      ],
      "availability_zone": "nova",
      "os-vol-host-attr:host": "ip-10-168-107-25",
      "source_vol_id": null,

```

```
"snapshot_id":null,  
"id":"5aa119a8-d25b-45a7-8d1b-88e127885635",  
"description":"This is yet, another volume.",  
"name":"vol-003",  
"created_at":"2013-02-25T02:40:21.000000",  
"volume_type":"None",  
"os-vol-tenant-attr:tenant_id":"0c2eba2c5af04d3f9e9d0d410b371fde",  
"size":1,  
"metadata":{  
  "contents":"not junk"  
}  
}  
]  
}
```

This operation does not return a response body.

Show volume information

| Method | URI | Description |
|--------|-------------------------------------|---|
| GET | /v2/{tenant_id}/volumes/{volume_id} | Shows information about a specified volume. |

Normal response codes: 200

Request

This table shows the URI parameters for the show volume information request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |
| {volume_id} | UUID | The unique identifier of an existing volume. |

This operation does not require a request body.

Response

Example 3.9. Show volume information: XML response

```
<?xml version='1.0' encoding='UTF-8'?>
<volume
  xmlns:os-vol-image-meta="http://docs.openstack.org/openstack-block-
storage/2.0/content/Volume_Image_Metadata.html"
  xmlns:os-vol-tenant-attr="http://docs.openstack.org/openstack-block-
storage/2.0/content/Volume_Tenant_Attribute.html"
  xmlns:os-vol-host-attr="http://docs.openstack.org/openstack-block-storage/
2.0/content/Volume_Host_Attribute.html"
  xmlns:atom="http://www.w3.org/2005/Atom"
  xmlns="http://docs.openstack.org/api/openstack-block-storage/2.0/content"
  status="available" name="vol-003" availability_zone="nova"
  created_at="2013-02-25 02:40:21"
  description="This is yet, another volume." volume_type="None"
  source_volid="None" snapshot_id="None"
  id="5aa119a8-d25b-45a7-8d1b-88e127885635" size="1"
  os-vol-tenant-attr:tenant_id="0c2eba2c5af04d3f9e9d0d410b371fde"
  os-vol-host-attr:host="ip-10-168-107-25">
  <attachments/>
  <metadata>
    <meta key="contents">not junk</meta>
  </metadata>
</volume>
```

Example 3.10. Show volume information: JSON response

```
{
  "volume": {
    "status": "available",
    "attachments": [
    ],
    "links": [
    {
```

```
        "href": "http://localhost:8776/v2/0c2eba2c5af04d3f9e9d0d410b371fde/  
volumes/5aa119a8-d25b-45a7-8d1b-88e127885635",  
        "rel": "self"  
    },  
    {  
        "href": "http://localhost:8776/0c2eba2c5af04d3f9e9d0d410b371fde/  
volumes/5aa119a8-d25b-45a7-8d1b-88e127885635",  
        "rel": "bookmark"  
    }  
],  
"availability_zone": "nova",  
"os-vol-host-attr:host": "ip-10-168-107-25",  
"source_volid": null,  
"snapshot_id": null,  
"id": "5aa119a8-d25b-45a7-8d1b-88e127885635",  
"description": "Super volume.",  
"name": "vol-002",  
"created_at": "2013-02-25T02:40:21.000000",  
"volume_type": "None",  
"os-vol-tenant-attr:tenant_id": "0c2eba2c5af04d3f9e9d0d410b371fde",  
"size": 1,  
"metadata": {  
    "contents": "not junk"  
}
```

This operation does not return a response body.

Update volume

| Method | URI | Description |
|--------|--|-------------------|
| PUT | /v2/{tenant_id}/volumes/ {volume_id}{?display_description, display_name} | Updates a volume. |

Normal response codes: 200

Request

This table shows the URI parameters for the update volume request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |
| {volume_id} | UUID | The unique identifier of an existing volume. |

This table shows the query parameters for the update volume request:

| Name | Type | Description |
|---------------------|----------------------|------------------------------|
| display_description | String (Optional) | A description of the volume. |
| display_name | String (Optional) | The name of the volume. |

Example 3.11. Update volume: XML request

```
<?xml version="1.0" encoding="UTF-8"?>
<snapshot
  xmlns="http://docs.openstack.org/openstack-block-storage/2.0/content"
  display_name="vol-003" display_description="This is yet, another volume." /
>
```

Example 3.12. Update volume: JSON request

```
{
  "volume": {
    "display_name": "vol-003",
    "display_description": "This is yet, another volume."
  }
}
```

This operation does not require a request body.

Response

Example 3.13. Update volume: XML response

```
<?xml version='1.0' encoding='UTF-8'?>
<volume xmlns:atom="http://www.w3.org/2005/Atom"
  xmlns="http://docs.openstack.org/api/openstack-block-storage/2.0/content"
  status="available" display_name="vol-003" availability_zone="nova"
```

```
created_at="2013-02-25 02:40:21"
display_description="This is yet, another volume." volume_type="None"
source_volid="None" snapshot_id="None"
id="5aa119a8-d25b-45a7-8d1b-88e127885635" size="1">
<attachments/>
<metadata>
  <meta key="contents">not junk</meta>
</metadata>
</volume>
```

Example 3.14. Update volume: JSON response

```
{
  "volume": {
    "status": "available",
    "attachments": [
      ],
    "links": [
      {
        "href": "http://localhost:8776/v2/0c2eba2c5af04d3f9e9d0d410b371fde/
volumes/5aa119a8-d25b-45a7-8d1b-88e127885635",
        "rel": "self"
      },
      {
        "href": "http://localhost:8776/0c2eba2c5af04d3f9e9d0d410b371fde/
volumes/5aa119a8-d25b-45a7-8d1b-88e127885635",
        "rel": "bookmark"
      }
    ],
    "availability_zone": "nova",
    "source_volid": null,
    "snapshot_id": null,
    "id": "5aa119a8-d25b-45a7-8d1b-88e127885635",
    "display_description": "This is yet, another volume.",
    "display_name": "vol-003",
    "created_at": "2013-02-25T02:40:21.000000",
    "volume_type": "None",
    "size": 1,
    "metadata": {
      "contents": "not junk"
    }
  }
}
```

This operation does not return a response body.

Delete volume

| Method | URI | Description |
|--------|---|-----------------------------|
| DELETE | /v2/{tenant_id}/volumes/ {volume_id} | Deletes a specified volume. |

Normal response codes: 202

Request

This table shows the URI parameters for the delete volume request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |
| {volume_id} | UUID | The unique identifier of an existing volume. |

This operation does not require a request body.

Snapshots

A snapshot is a point in time copy of the data that a volume contains.

When you create, list, or delete snapshots, these status values are possible:

| Status | Description |
|----------------|---|
| creating | The snapshot is being created. |
| available | The snapshot is ready to be used. |
| deleting | The snapshot is being deleted. |
| error | An error occurred during snapshot creation. |
| error_deleting | An error occurred during snapshot deletion. |

| Method | URI | Description |
|--------|---|--|
| POST | /v2/{tenant_id}/snapshots {?snapshot,volume_id,force, display_name,display_description} | Creates a snapshot, which is a point-in-time copy of a volume. You can create a volume from the snapshot. |
| GET | /v2/{tenant_id}/snapshots | Lists summary information for all Block Storage snapshots that the tenant who submits the request can access. |
| GET | /v2/{tenant_id}/snapshots/detail | Lists detailed information for all Block Storage snapshots that the tenant who submits the request can access. |
| GET | /v2/{tenant_id}/snapshots/ {snapshot_id} | Shows information for a specified snapshot. |
| PUT | /v2/{tenant_id}/ snapshots/{snapshot_id}{? display_description,display_name} | Updates a specified snapshot. |
| DELETE | /v2/{tenant_id}/snapshots/ {snapshot_id} | Deletes a specified snapshot. |

Create snapshot

| Method | URI | Description |
|--------|---|---|
| POST | /v2/{tenant_id}/snapshots {?snapshot,volume_id,force, display_name,display_description} | Creates a snapshot, which is a point-in-time copy of a volume. You can create a volume from the snapshot. |

Normal response codes: 202

Request

This table shows the URI parameters for the create snapshot request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |

This table shows the query parameters for the create snapshot request:

| Name | Type | Description |
|---------------------|------------------------------|--|
| snapshot | String <i>(Required)</i> | A partial representation of a snapshot used in the creation process. |
| volume_id | String <i>(Required)</i> | To create a snapshot from an existing volume, specify the ID of the existing volume. |
| force | Boolean <i>(Optional)</i> | [True/False] Indicate whether to snapshot, even if the volume is attached. Default==False. |
| display_name | String <i>(Optional)</i> | Name of the snapshot. Default==None. |
| display_description | String <i>(Optional)</i> | Description of snapshot. Default==None. |

Example 3.15. Create snapshot: XML request

```
<?xml version="1.0" encoding="UTF-8"?>
<snapshot
  xmlns="http://docs.openstack.org/openstack-block-storage/2.0/content"
  name="snap-001" description="Daily backup"
  volume_id="5aa119a8-d25b-45a7-8d1b-88e127885635" force="true"/>
```

Example 3.16. Create snapshot: JSON request

```
{
  "snapshot": {
    "name": "snap-001",
    "description": "Daily backup",
    "volume_id": "5aa119a8-d25b-45a7-8d1b-88e127885635",
    "force": true
  }
}
```

This operation does not require a request body.

Response

Example 3.17. Create snapshot: XML response

```
<?xml version='1.0' encoding='UTF-8'?>
<snapshot status="creating" description="Daily backup"
  created_at="2013-02-25T03:56:53.081642"
  volume_id="5aa119a8-d25b-45a7-8d1b-88e127885635" size="1"
  id="ffa9bc5e-1172-4021-acaf-cdcd78a9584d" name="snap-001">
  <metadata/>
</snapshot>
```

Example 3.18. Create snapshot: JSON response

```
{
  "snapshot": {
    "status": "creating",
    "description": "Daily backup",
    "created_at": "2013-02-25T03:56:53.081642",
    "metadata": {
    },
    "volume_id": "5aa119a8-d25b-45a7-8d1b-88e127885635",
    "size": 1,
    "id": "ffa9bc5e-1172-4021-acaf-cdcd78a9584d",
    "name": "snap-001"
  }
}
```

This operation does not return a response body.

List snapshots

| Method | URI | Description |
|--------|---------------------------|---|
| GET | /v2/{tenant_id}/snapshots | Lists summary information for all Block Storage snapshots that the tenant who submits the request can access. |

Normal response codes: 200

Request

This table shows the URI parameters for the list snapshots request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |

This operation does not require a request body.

Response

Example 3.19. List snapshots: XML response

```
<?xml version='1.0' encoding='UTF-8'?>
<snapshots>
  <snapshot status="available" description="Very important"
    created_at="2013-02-25 04:13:17"
    volume_id="5aa119a8-d25b-45a7-8d1b-88e127885635" size="1"
    id="2bb856e1-b3d8-4432-a858-09e4ce939389" name="snap-001">
    <metadata/>
  </snapshot>
  <snapshot status="available" description="Weekly backup"
    created_at="2013-02-25 07:20:38"
    volume_id="806092e3-7551-4fff-a005-49016f4943b1" size="1"
    id="e820db06-58b5-439d-bac6-c01faa3f6499" name="snap-002">
    <metadata/>
  </snapshot>
</snapshots>
```

Example 3.20. List snapshots: JSON response

```
{
  "snapshots": [
    {
      "status": "available",
      "description": "Very important",
      "created_at": "2013-02-25T04:13:17.000000",
      "metadata": {
      },
      "volume_id": "5aa119a8-d25b-45a7-8d1b-88e127885635",
      "size": 1,
      "id": "2bb856e1-b3d8-4432-a858-09e4ce939389",
      "name": "snap-001"
    },
    {
      "status": "available",
```

```
"description": "Weekly backup",
"created_at": "2013-02-25T07:20:38.000000",
"metadata": {
  },
"volume_id": "806092e3-7551-4fff-a005-49016f4943b1",
"size": 1,
"id": "e820db06-58b5-439d-bac6-c01faa3f6499",
"name": "snap-002"
}
]
}
```

This operation does not return a response body.

List snapshots (detailed)

| Method | URI | Description |
|--------|----------------------------------|--|
| GET | /v2/{tenant_id}/snapshots/detail | Lists detailed information for all Block Storage snapshots that the tenant who submits the request can access. |

Normal response codes: 200

Request

This table shows the URI parameters for the list snapshots (detailed) request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |

This operation does not require a request body.

Response

Example 3.21. List snapshots (detailed): XML response

```
<?xml version='1.0' encoding='UTF-8'?>
<snapshots
  xmlns:os-extended-snapshot-attributes="http://docs.openstack.org/
openstack-block-storage/2.0/content/Extended_Snapshot_Attributes.html">
  <snapshot status="available" description="Daily backup"
    created_at="2013-02-25 07:30:12"
    volume_id="5aa119a8-d25b-45a7-8d1b-88e127885635" size="30"
    id="43f20e0e-2c2c-4770-9d4e-c3d769ae5470" name="snap-001"
    os-extended-snapshot-attributes:project_id=
"0c2eba2c5af04d3f9e9d0d410b371fde"
    os-extended-snapshot-attributes:progress="100%">
    <metadata/>
  </snapshot>
  <snapshot status="available" description="Weekly backup"
    created_at="2013-02-25 07:20:38"
    volume_id="806092e3-7551-4fff-a005-49016f4943b1" size="1"
    id="e820db06-58b5-439d-bac6-c01faa3f6499" name="snap-002"
    os-extended-snapshot-attributes:project_id=
"0c2eba2c5af04d3f9e9d0d410b371fde"
    os-extended-snapshot-attributes:progress="100%">
    <metadata/>
  </snapshot>
</snapshots>
```

Example 3.22. List snapshots (detailed): JSON response

```
{
  "snapshots": [
    {
      "status": "available",
      "os-extended-snapshot-attributes:progress": "100%",
      "description": "Daily backup",
      "created_at": "2013-02-25T07:30:12.000000",
      "metadata": {
```



```
    },
    "volume_id": "5aa119a8-d25b-45a7-8d1b-88e127885635",
    "os-extended-snapshot-
attributes:project_id": "0c2eba2c5af04d3f9e9d0d410b371fde",
    "size": 30,
    "id": "43f20e0e-2c2c-4770-9d4e-c3d769ae5470",
    "name": "snap-001"
  },
  {
    "status": "available",
    "os-extended-snapshot-attributes:progress": "100%",
    "description": "Weekly backup",
    "created_at": "2013-02-25T07:20:38.000000",
    "metadata": {
      },
    "volume_id": "806092e3-7551-4fff-a005-49016f4943b1",
    "os-extended-snapshot-
attributes:project_id": "0c2eba2c5af04d3f9e9d0d410b371fde",
    "size": 1,
    "id": "e820db06-58b5-439d-bac6-c01faa3f6499",
    "name": "snap-002"
  }
]
}
```

This operation does not return a response body.

Show snapshot information

| Method | URI | Description |
|--------|---|---|
| GET | /v2/{tenant_id}/snapshots/ {snapshot_id} | Shows information for a specified snapshot. |

Normal response codes: 200

Request

This table shows the URI parameters for the show snapshot information request:

| Name | Type | Description |
|---------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |
| {snapshot_id} | UUID | The unique identifier of an existing snapshot. |

This operation does not require a request body.

Response

Example 3.23. Show snapshot information: XML response

```
<?xml version='1.0' encoding='UTF-8'?>
<snapshot
  xmlns:os-extended-snapshot-attributes="http://docs.openstack.org/openstack-
block-storage/2.0/content/Extended_Snapshot_Attributes.html"
  status="available" description="Very important"
  created_at="2013-02-25 04:13:17"
  volume_id="5aa119a8-d25b-45a7-8d1b-88e127885635" size="1"
  id="2bb856e1-b3d8-4432-a858-09e4ce939389" name="snap-001"
  os-extended-snapshot-attributes:project_id=
"0c2eba2c5af04d3f9e9d0d410b371fde"
  os-extended-snapshot-attributes:progress="100%">
  <metadata/>
</snapshot>
```

Example 3.24. Show snapshot information: JSON response

```
{
  "snapshot": {
    "status": "available",
    "os-extended-snapshot-attributes:progress": "100%",
    "description": "Daily backup",
    "created_at": "2013-02-25T04:13:17.000000",
    "metadata": {
    },
    "volume_id": "5aa119a8-d25b-45a7-8d1b-88e127885635",
    "os-extended-snapshot-
attributes:project_id": "0c2eba2c5af04d3f9e9d0d410b371fde",
    "size": 1,
    "id": "2bb856e1-b3d8-4432-a858-09e4ce939389",
    "name": "snap-001"
  }
}
```

This operation does not return a response body.

Update snapshot

| Method | URI | Description |
|--------|--|-------------------------------|
| PUT | /v2/{tenant_id}/ snapshots/{snapshot_id}{? display_description,display_name} | Updates a specified snapshot. |

Normal response codes: 200

Request

This table shows the URI parameters for the update snapshot request:

| Name | Type | Description |
|---------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |
| {snapshot_id} | UUID | The unique identifier of an existing snapshot. |

This table shows the query parameters for the update snapshot request:

| Name | Type | Description |
|---------------------|----------------------|---------------------------|
| display_description | String (Optional) | Describes the snapshot. |
| display_name | String (Optional) | The name of the snapshot. |

Example 3.25. Update snapshot: XML request

```
<?xml version="1.0" encoding="UTF-8"?>
<snapshot
  xmlns="http://docs.openstack.org/openstack-block-storage/2.0/content"
  display_name="snap-002" display_description="This is yet, another
  snapshot." />
```

Example 3.26. Update snapshot: JSON request

```
{
  "snapshot": {
    "display_name": "snap-002",
    "display_description": "This is yet, another snapshot."
  }
}
```

This operation does not require a request body.

Response

Example 3.27. Update snapshot: XML response

```
<?xml version='1.0' encoding='UTF-8'?>
<snapshot
  xmlns:os-extended-snapshot-attributes="http://docs.openstack.org/openstack-
  block-storage/2.0/content/Extended_Snapshot_Attributes.html"
```

```
status="available"
display_description="This is yet, another snapshot"
created_at="2013-02-20T08:11:34.000000"
volume_id="2402b902-0b7a-458c-9c07-7435a826f794"
size="1"
id="4b502fcb-1f26-45f8-9fe5-3b9a0a52eaf2"
display_name="vol-002"
os-extended-snapshot-attributes:project_id=
"0c2eba2c5af04d3f9e9d0d410b371fde"
os-extended-snapshot-attributes:progress="100%">
<metadata/>
</snapshot>
```

Example 3.28. Update snapshot: JSON response

```
{
  "snapshot": {
    "created_at": "2013-02-20T08:11:34.000000",
    "display_description": "This is yet, another snapshot",
    "display_name": "vol-002",
    "id": "4b502fcb-1f26-45f8-9fe5-3b9a0a52eaf2",
    "size": 1,
    "status": "available",
    "volume_id": "2402b902-0b7a-458c-9c07-7435a826f794"
  }
}
```

This operation does not return a response body.

Delete snapshot

| Method | URI | Description |
|--------|---|-------------------------------|
| DELETE | /v2/{tenant_id}/snapshots/ {snapshot_id} | Deletes a specified snapshot. |

Normal response codes: 202

Request

This table shows the URI parameters for the delete snapshot request:

| Name | Type | Description |
|---------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |
| {snapshot_id} | UUID | The unique identifier of an existing snapshot. |

This operation does not require a request body.

Volume types

| Method | URI | Description |
|--------|--|--|
| GET | /v2/{tenant_id}/types | Lists volume types. |
| GET | /v2/{tenant_id}/types/ {volume_type_id} | Shows information about a specified volume type. |

List volume types

| Method | URI | Description |
|--------|-----------------------|---------------------|
| GET | /v2/{tenant_id}/types | Lists volume types. |

Normal response codes: 200

Request

This table shows the URI parameters for the list volume types request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |

This operation does not require a request body.

Response

Example 3.29. List volume types: XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<volume_types
  xmlns="http://docs.openstack.org/openstack-block-storage/2.0/content">
  <volume_type id="6685584b-1eac-4da6-b5c3-555430cf68ff" name="SSD">
    <extra_specs>
      <extra_spec key="capabilities">gpu</extra_spec>
    </extra_specs>
  </volume_type>
  <volume_type id="8eb69a46-df97-4e41-9586-9a40a7533803" name="SATA"
  />
</volume_types>
```

Example 3.30. List volume types: JSON response

```
{
  "volume_types": [
    {
      "extra_specs": {
        "capabilities": "gpu"
      },
      "id": "6685584b-1eac-4da6-b5c3-555430cf68ff",
      "name": "SSD"
    },
    {
      "extra_specs": {
      },
      "id": "8eb69a46-df97-4e41-9586-9a40a7533803",
      "name": "SATA"
    }
  ]
}
```

This operation does not return a response body.

Show volume type information

| Method | URI | Description |
|--------|--|--|
| GET | /v2/{tenant_id}/types/{volume_type_id} | Shows information about a specified volume type. |

Normal response codes: 200

Request

This table shows the URI parameters for the show volume type information request:

| Name | Type | Description |
|------------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |
| {volume_type_id} | UUID | The unique identifier of an existing volume type. |

This operation does not require a request body.

Response

Example 3.31. Show volume type information: JSON response

```
{
  "volume_type": {
    "id": "6685584b-1eac-4da6-b5c3-555430cf68ff",
    "name": "SSD",
    "extra_specs": {
      "capabilities": "gpu"
    }
  }
}
```

Example 3.32. Show volume type information: XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<volume_type
  xmlns="http://docs.openstack.org/openstack-block-storage/2.0/content"
  id="6685584b-1eac-4da6-b5c3-555430cf68ff" name="SSD">
  <extra_specs>
    <extra_spec key="capabilities">gpu</extra_spec>
  </extra_specs>
</volume_type>
```

This operation does not return a response body.

Backups extension

A backup is a full copy of a volume stored in an external service. The service can be configured. The only supported service for now is Object Storage. A backup can subsequently be restored from the external service to either the same volume that the backup was originally taken from, or to a new volume. backup and restore operations can only be carried out on volumes which are in an unattached and available state.

When you create, list, or delete backups, these status values are possible:

| Status | Description |
|-----------------|--|
| creating | The backup is being created. |
| available | The backup is ready to be restored to a volume. |
| deleting | The backup is being deleted. |
| error | An error has occurred with the backup. |
| restoring | The backup is being restored to a volume. |
| error_restoring | An error occurred during backup restoration to a volume. |

In the event of an error, more information about the error can be found in the `fail_reason` field for the backup.

| Method | URI | Description |
|--------|--|---|
| POST | <code>/v2/{tenant_id}/backups</code> | Creates a Block Storage backup from a volume. |
| GET | <code>/v2/{tenant_id}/backups</code> | Lists backups defined in Block Storage to which the tenant who submits the request has access. |
| GET | <code>/v2/{tenant_id}/backups/detail</code> | Lists detailed information for backups defined in Block Storage to which the tenant who submits the request has access. |
| GET | <code>/v2/{tenant_id}/backups/{backup_id}</code> | Shows details for a specified backup. |
| DELETE | <code>/v2/{tenant_id}/backups/{backup_id}</code> | Deletes a specified backup. |
| POST | <code>/v2/{tenant_id}/backups/{backup_id}/restore</code> | Restores a Block Storage backup to an existing or new Block Storage volume. |

Create backup

| Method | URI | Description |
|--------|-------------------------|---|
| POST | /v2/{tenant_id}/backups | Creates a Block Storage backup from a volume. |

Normal response codes: 202

Request

This table shows the URI parameters for the create backup request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |

Example 3.33. Create backup: JSON request

```
{
  "backup": {
    "container": null,
    "description": null,
    "name": "backup001",
    "volume_id": "64f5d2fb-d836-4063-b7e2-544d5c1ff607"
  }
}
```

Response

Example 3.34. Create backup: JSON response

```
{
  "backup": {
    "id": "deac8b8c-35c9-4c71-aaa-889c2d5d5c8e",
    "links": [
      {
        "href": "http://localhost:8776/v2/c95fc3e4afe248a49a28828f286a7b38/backups/deac8b8c-35c9-4c71-aaa-889c2d5d5c8e",
        "rel": "self"
      },
      {
        "href": "http://localhost:8776/c95fc3e4afe248a49a28828f286a7b38/backups/deac8b8c-35c9-4c71-aaa-889c2d5d5c8e",
        "rel": "bookmark"
      }
    ],
    "name": "backup001"
  }
}
```

List backups

| Method | URI | Description |
|--------|-------------------------|--|
| GET | /v2/{tenant_id}/backups | Lists backups defined in Block Storage to which the tenant who submits the request has access. |

Normal response codes: 200

Request

This table shows the URI parameters for the list backups request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |

This operation does not require a request body.

Response

Example 3.35. List backups: JSON response

```
{
  "backups": [
    {
      "id": "2ef47aee-8844-490c-804d-2a8efe561c65",
      "links": [
        {
          "href": "http://localhost:8776/v1/c95fc3e4afe248a49a28828f286a7b38/backups/2ef47aee-8844-490c-804d-2a8efe561c65",
          "rel": "self"
        },
        {
          "href": "http://localhost:8776/c95fc3e4afe248a49a28828f286a7b38/backups/2ef47aee-8844-490c-804d-2a8efe561c65",
          "rel": "bookmark"
        }
      ],
      "name": "backup001"
    },
    {
      "id": "4dbf0ec2-0b57-4669-9823-9f7c76f2b4f8",
      "links": [
        {
          "href": "http://localhost:8776/v1/c95fc3e4afe248a49a28828f286a7b38/backups/4dbf0ec2-0b57-4669-9823-9f7c76f2b4f8",
          "rel": "self"
        },
        {
          "href": "http://localhost:8776/c95fc3e4afe248a49a28828f286a7b38/backups/4dbf0ec2-0b57-4669-9823-9f7c76f2b4f8",
          "rel": "bookmark"
        }
      ]
    }
  ],
}
```

```
    "name" : "backup002"  
  }  
]  
}
```

List backups (detailed)

| Method | URI | Description |
|--------|--------------------------------|---|
| GET | /v2/{tenant_id}/backups/detail | Lists detailed information for backups defined in Block Storage to which the tenant who submits the request has access. |

Normal response codes: 200

Request

This table shows the URI parameters for the list backups (detailed) request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |

This operation does not require a request body.

Response

Example 3.36. List backups (detailed): JSON response

```
{
  "backups": [
    {
      "availability_zone": "az1",
      "container": "volumebackups",
      "created_at": "2013-04-02T10:35:27.000000",
      "description": null,
      "fail_reason": null,
      "id": "2ef47aee-8844-490c-804d-2a8efe561c65",
      "links": [
        {
          "href": "http://localhost:8776/v1/c95fc3e4afe248a49a28828f286a7b38/backups/2ef47aee-8844-490c-804d-2a8efe561c65",
          "rel": "self"
        },
        {
          "href": "http://localhost:8776/c95fc3e4afe248a49a28828f286a7b38/backups/2ef47aee-8844-490c-804d-2a8efe561c65",
          "rel": "bookmark"
        }
      ]
    },
    {
      "name": "backup001",
      "object_count": 22,
      "size": 1,
      "status": "available",
      "volume_id": "e5185058-943a-4cb4-96d9-72c184c337d6"
    }
  ],
  {
    "availability_zone": "az1",
    "container": "volumebackups",
    "created_at": "2013-04-02T10:21:48.000000",
    "description": null,
```

```
    "fail_reason": null,
    "id": "4dbf0ec2-0b57-4669-9823-9f7c76f2b4f8",
    "links": [
      {
        "href": "http://localhost:8776/v1/c95fc3e4afe248a49a28828f286a7b38/backups/4dbf0ec2-0b57-4669-9823-9f7c76f2b4f8",
        "rel": "self"
      },
      {
        "href": "http://localhost:8776/c95fc3e4afe248a49a28828f286a7b38/backups/4dbf0ec2-0b57-4669-9823-9f7c76f2b4f8",
        "rel": "bookmark"
      }
    ],
    "name": "backup002",
    "object_count": 22,
    "size": 1,
    "status": "available",
    "volume_id": "e5185058-943a-4cb4-96d9-72c184c337d6"
  }
]
}
```

Show backup details

| Method | URI | Description |
|--------|-------------------------------------|---------------------------------------|
| GET | /v2/{tenant_id}/backups/{backup_id} | Shows details for a specified backup. |

Normal response codes: 200

Request

This table shows the URI parameters for the show backup details request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |
| {backup_id} | UUID | The unique identifier for a backup. |

This operation does not require a request body.

Response

Example 3.37. Show backup details: JSON response

```
{
  "backup": {
    "availability_zone": "az1",
    "container": "volumebackups",
    "created_at": "2013-04-02T10:35:27.000000",
    "description": null,
    "fail_reason": null,
    "id": "2ef47aee-8844-490c-804d-2a8efe561c65",
    "links": [
      {
        "href": "http://localhost:8776/v1/c95fc3e4afe248a49a28828f286a7b38/backups/2ef47aee-8844-490c-804d-2a8efe561c65",
        "rel": "self"
      },
      {
        "href": "http://localhost:8776/c95fc3e4afe248a49a28828f286a7b38/backups/2ef47aee-8844-490c-804d-2a8efe561c65",
        "rel": "bookmark"
      }
    ],
    "name": "backup001",
    "object_count": 22,
    "size": 1,
    "status": "available",
    "volume_id": "e5185058-943a-4cb4-96d9-72c184c337d6"
  }
}
```

Delete backup

| Method | URI | Description |
|--------|---|-----------------------------|
| DELETE | /v2/{tenant_id}/backups/ {backup_id} | Deletes a specified backup. |

Normal response codes: 202

Request

This table shows the URI parameters for the delete backup request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |
| {backup_id} | UUID | The unique identifier for a backup. |

This operation does not require a request body.

Restore backup

| Method | URI | Description |
|--------|---|---|
| POST | /v2/{tenant_id}/backups/{backup_id}/restore | Restores a Block Storage backup to an existing or new Block Storage volume. |

Normal response codes: 202

Request

This table shows the URI parameters for the restore backup request:

| Name | Type | Description |
|-------------|--------|---|
| {tenant_id} | String | The unique identifier of the tenant or account. |
| {backup_id} | UUID | The unique identifier for a backup. |

Example 3.38. Restore backup: JSON request

```
{
  "restore": {
    "volume_id": "64f5d2fb-d836-4063-b7e2-544d5c1ff607"
  }
}
```

Response

Example 3.39. Restore backup: JSON response

```
{
  "restore": {
    "backup_id": "2ef47aee-8844-490c-804d-2a8efe561c65",
    "volume_id": "795114e8-7489-40be-a978-83797f2c1dd3"
  }
}
```