



Talend Open Studio for ESB Mediation Components Reference Guide

5.2.1

Adapted for v5.2.1. Supersedes previous Reference Guide releases.

Copyright

This documentation is provided under the terms of the Creative Commons Public License (CCPL).

For more information about what you can and cannot do with this documentation in accordance with the CCPL, please read: <http://creativecommons.org/licenses/by-nc-sa/2.0/>

Notices

Talend, Talend Integration Factory, Talend Service Factory, and Talend ESB are trademarks of Talend, Inc.

Apache CXF, CXF, Apache Karaf, Karaf, Apache Camel, Camel, Apache Maven, Maven, Apache Archiva and Archiva are trademarks of The Apache Foundation.

SoapUI is a trademark of SmartBear Software.

All other brands, product names, company names, trademarks and service marks are the properties of their respective owners.

Table of Contents

Preface	v		
General information	v		
Purpose	v		
Audience	v		
Typographical conventions	v		
Feedback and Support	v		
Context components	1		
cBeanRegister	2		
cBeanRegister properties	2		
Related Scenario	2		
cConfig	3		
cConfig properties	3		
Scenario: Implementing a dataset from the Registry	3		
cJMSConnectionFactory	7		
cJMSConnectionFactory properties	7		
Related scenario:	8		
Exception components	9		
cErrorHandler	10		
cErrorHandler properties	10		
Scenario: Logging the exception thrown during a client/server talk	10		
cIntercept	14		
cIntercept properties	14		
Scenario: Intercepting several routes and redirect them in a single new route	14		
cOnException	18		
cOnException properties	18		
Scenario: Using cOnException to ignore exceptions and continue message routing	18		
cTry	23		
cTry properties	23		
Scenario: Using cTry to build Try/ Catch/Finally blocks for exception handling	23		
Messaging components	29		
cCXF	30		
cCXF properties	30		
Scenario 1: Providing a Web service using cCXF from a WSDL file	31		
Scenario 2: Providing a Web service using cCXF from a Java class	33		
Scenario 3: Providing a Web service from a Route Resource	36		
cDataset	40		
cDataset properties	40		
Scenario: Using cDataset to receive messages	40		
cFile	44		
cFile properties	44		
Scenario: Reading files from one directory and writing them to another	44		
cFtp	47		
cFtp properties	47		
Related scenario:	47		
cHttp	48		
cHttp properties	48		
Scenario: Retrieving the content of a remote file	49		
cJMS	53		
cJMS properties	53		
Scenario 1: Sending and receiving a message from a JMS queue	53		
Scenario 2: Setting up a JMS local transaction	57		
		Scenario 3: Sending and receiving a scheduled delivery of messages from a JMS Queue using Camel Quartz	64
		cMail	70
		cMail Properties	70
		Scenario: Using cMail to send and receive mails	70
		cMessagingEndpoint	74
		cMessagingEndpoint properties	74
		Commonly used Camel components	74
		Scenario 1: Moving files from one message endpoint to another	78
		Scenario 2: Sending files to another message endpoint	79
		Scenario 3: Using an Xquery endpoint to filter messages	81
		cTimer	89
		cTimer properties	89
		Related Scenario:	89
		Miscellaneous components	91
		cLog	92
		cLog properties	92
		Related scenario:	92
		cLoop	93
		cLoop properties	93
		Related scenario:	93
		cStop	94
		cStop properties	94
		Related scenario:	94
		Processor components	95
		cBean	96
		cBean properties	96
		Related Scenario	96
		cDelayer	97
		cDelayer properties	97
		Scenario: Using cDelayer to delay message routing	97
		cExchangePattern	101
		cExchangePattern properties	101
		Scenario: Enabling the InOut exchange pattern to get replies	101
		cJavaDSLProcessor	105
		cJavaDSLProcessor properties	105
		Related scenario:	105
		cProcessor	106
		cProcessor properties	106
		Related scenario:	106
		cTalendJob	107
		cTalendJob properties	107
		Scenario: Using camel message headers as context parameters to call a job	107
		Routing components	113
		cAggregate	114
		cAggregate	114
		Scenario: Aggregating three messages into one	116
		cDynamicRouter	121
		cDynamicRouter properties	121
		Scenario: Routing files conditionally to different file paths	121
		cIdempotentConsumer	126
		cIdempotentConsumer properties	126
		Scenario: Deduplicating messages while routing them	126
		cLoadBalancer	131
		cLoadBalancer properties	131
		Scenario: Distributing messages to receiver endpoints based on round robin	132
		cMessageFilter	136

cMessageFilter properties	136
Scenario: Filtering messages according to a criterion	136
cMessageRouter	140
cMessageRouter properties	140
Scenario: Routing messages according to a criterion	140
cMulticast	145
cMulticast properties	145
Scenario: Route a message to multiple endpoints and set a new body for each	145
cPipesAndFilters	151
cPipesAndFilters properties	151
Scenario: Using cPipesAndFilters to process the task in sequence	151
cRecipientList	155
cRecipientList properties	155
Scenario: Routing a message to multiple recipients	155
cRoutingSlip	159
cRoutingSlip properties	159
Scenario 1: Routing a message consecutively to a series of endpoints	159
Scenario 2: Routing each message conditionally to a series of endpoints...	163
cSplitter	166
cSplitter properties	166
Related scenario:	166
cThrottler	167
cThrottler properties	167
Scenario: Throttling the message flow	167
Viewing the code and executing the Route	169
cWireTap	171
cWireTap properties	171
Scenario: Wiretapping a message in a Route	171
Transformation components	175
cContentEnricher	176
cContentEnricher properties	176
Scenario: Receiving messages from a list of URLs	176
cConvertBodyTo	183
cConvertBodyTo properties	183
Scenario: Converting the body of an XML file into an org.w3c.dom.Document.class	183
cSetBody	188
cSetBody properties	188
Scenario: Replacing the content of messages with their extracts	188
cSetHeader	192
cSetHeader properties	192
Scenario: Splitting a message and renaming the sub-messages according to contained information	192
Related scenarios	196

Preface

General information

Purpose

This Reference Guide explains in detail the major Camel components of the **Mediation** perspective of *Talend Open Studio for ESB*.

Information presented in this document applies to *Talend Open Studio for ESB* releases beginning with **5.2.1**.

Audience



This guide is for users and administrators of *Talend Open Studio for ESB*.



The layout of GUI screens provided in this document may vary slightly from your actual GUI.

Typographical conventions

This guide uses the following typographical conventions:

- text in **bold**: window and dialog box buttons and fields, keyboard keys, menus, and menu options,
- text in [**bold**]: window, wizard, and dialog box titles,
- text in `courier`: system parameters typed in by the user,
- text in *italics*: file, schema, column, row, and variable names referred to in all use cases, and also names of the fields in the Basic and Advanced setting views referred to in the property table for each component,
- The  icon indicates an item that provides additional information about an important point. It is also used to add comments related to a table or a figure,
- The  icon indicates a message that gives information about the execution requirements or recommendation type. It is also used to refer to situations or information the end-user needs to be aware of or pay special attention to.

Feedback and Support

Your feedback is valuable. Do not hesitate to give your input, make suggestions or requests regarding this documentation or product and find support from the **Talend** team, on **Talend**'s Forum website at:

<http://talendforge.org/forum>



Context components

This chapter details the major components that you can find in the **Context** family from the **Palette** of the **Mediation** perspective of *Talend Open Studio for ESB*.

The **Context** family groups components that define contexts you want to use in your Routes.

cBeanRegister



cBeanRegister properties

Component Family	Context	
Function	cBeanRegister registers a Java bean that can be referenced by a cBean .	
Purpose	cBeanRegister allows you to register a Java bean that can be referenced by a cBean .	
Basic settings	<i>Id</i>	Enter the Id for the Java bean you want to register.
	<i>Simple</i>	Select this option to call a bean class that is stored in the Code node of the Repository .
	<i>Customized</i>	Select this option to define the Java bean by entering the code in the Code box.
	<i>Class Name</i>	This field appears when the Simple option is selected. Enter the name of the bean class that is stored in the Code node of the Repository . For more information about creating and using Java Beans, see <i>Talend Open Studio for ESB User Guide</i> .
	<i>Specify Arguments</i>	This check box appears when the Simple option is selected. Select this check box to set the optional arguments in the corresponding table. Click [+] as many times as required to add arguments to the table.
	<i>Imports</i>	This box appears when the Customized option is selected. Enter the Java code that helps to import, if necessary, external libraries used in the Code box.
	<i>Code</i>	This box appears when the Customized option is selected. Enter the code of the bean in the box.
Usage	cBeanRegister cannot be added directly in a Route.	
Limitation	n/a	

Related Scenario

For a related scenario, see:

- **cConvertBodyTo**: [section Scenario: Converting the body of an XML file into an org.w3c.dom.Document.class.](#)

cConfig




cConfig properties

Component Family	Context	
Function	cConfig allows you to set the CamelContext.	
Purpose	cConfig manipulates the Camel context as needed by the Routes.	
Basic settings	<i>Imports</i>	Enter the Java code that helps to import, if necessary, external libraries used in the Code box.
	<i>Code</i>	Write a piece of code to manipulate the CamelContext.
	<i>Dependencies</i>	Select the library or libraries that is required by the CamelContext or Typeconverter Registry from the list.
Usage	cConfig cannot be added directly in a Route.	
Limitation	n/a	

Scenario: Implementing a dataset from the Registry

In this scenario, an instance of dataset is added in the Registry and implemented by a **cMessagingEndpoint** component.

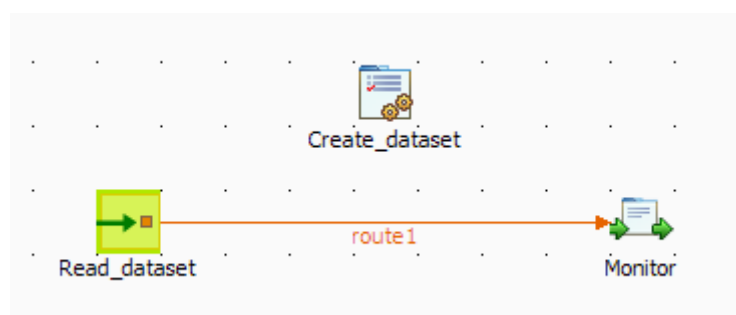


Dropping and linking the components

1. From the **Palette**, expand the **Context** folder, and drop a **cConfig** component onto the design workspace.
2. Expand the **Messaging** folder, and drop a **cMessagingEndpoint** component onto the design workspace.
3. Expand the **Processor** folder, and drop a **cProcessor** component onto the design workspace.
4. Right-click the input **cMessagingEndpoint** component, select **Row > Route** from the contextual menu and click the **cProcessor** component.
5. Label the components to better identify their functionality.

Configuring the components


1. Double-click the **cConfig** component, which is labelled *Create_dataset*, to display its **Basic settings** view in the **Component** tab. and set its parameters.

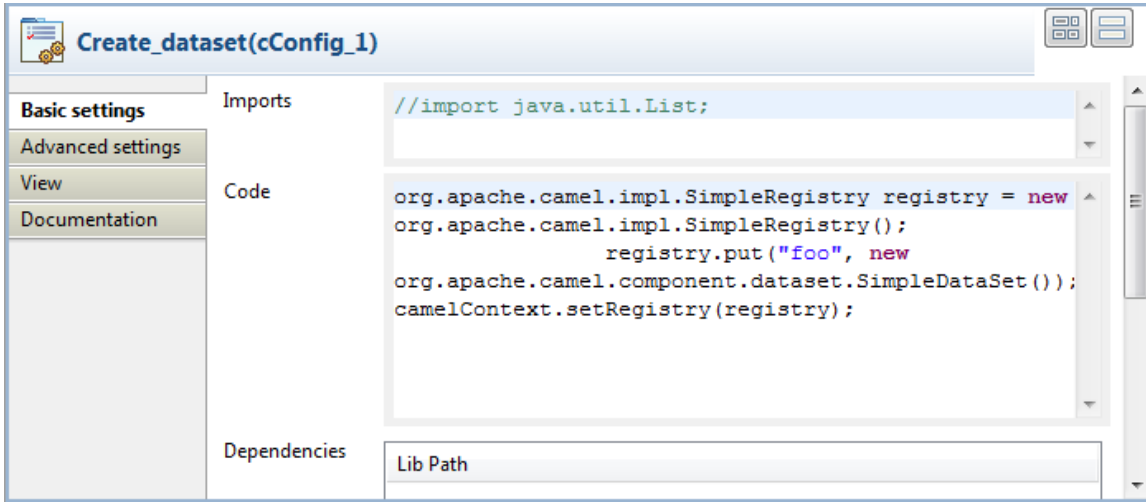


2. Write a piece of code in the **Code** field to register the dataset instance *foo* into the registry, as shown below.

```
org.apache.camel.impl.SimpleRegistry registry = new
org.apache.camel.impl.SimpleRegistry();
    registry.put("foo", new
org.apache.camel.component.dataset.SimpleDataSet());
camelContext.setRegistry(registry);
```

3. Double-click the input **cMessagingEndpoint** component, which is labelled *Read_dataset*, to display its **Basic settings** view in the **Component** tab.

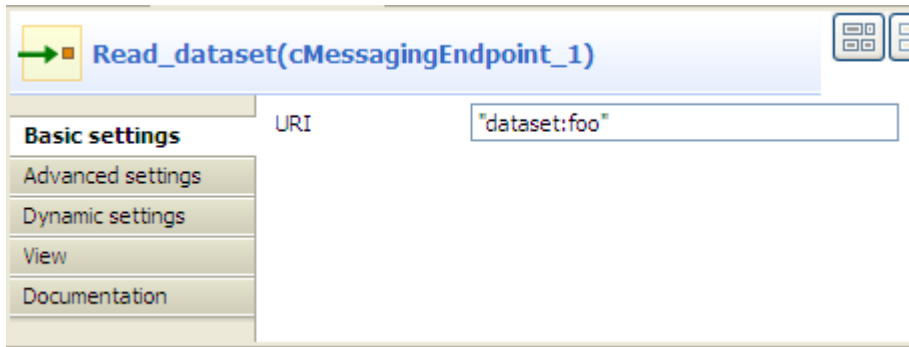

4. In the **URI** field, enter *dataset:foo* between the quotation marks.
5. Double-click the **cProcessor** component, which is labelled *Monitor*, to display its **Basic settings** view in the **Component** tab.

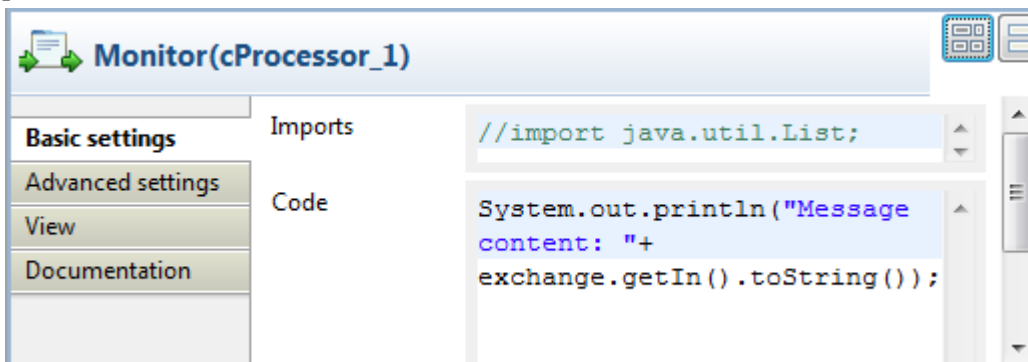

- In the **Code** box, customize the code as follows so that the **Run** console displays the message contents:

```
System.out.println("Message content: "+
exchange.getIn().toString());
```

- Press **Ctrl+S** to save your route.

Viewing code and executing the Route

- Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Read_dataset"))
                .routeId("Read_dataset").process(
                    new org.apache.camel.Processor() {
                        public void process(
                            org.apache.camel.Exchange exchange)
                            throws Exception {
                            System.out
                                .println("Message content: "
                                    + exchange
                                        .getIn()
                                        .toString());
                        }
                    }
                );
        }
    }.id("cProcessor_1");
};
getCamelContexts().get(0).addRoutes(routeBuilder);
```

As shown in the code, a message route is built from the endpoint identified by `Read_dataset` and `cProcessor_1` gets the message content and displays it on the console.

- Click the **Run** view to display it and click the **Run** button to launch the execution of your route. You can also press **F6** to execute it.

RESULT: The message content is printed in the console.



cJMSConnectionFactory



cJMSConnectionFactory properties

Component Family	Context	
Function	cJMSConnectionFactory specifies the connection factory that can be used by multiple cJMS components in a Route.	
Purpose	cJMSConnectionFactory is used to specify the JMS connection factory for message handling.	
	<i>MQ Server</i>	Select an MQ server from ActiveMQ , Customized , or WebSphere MQ .
	<i>Use Transaction</i>	Select this check box to enable local transaction in the current Route.
	<i>Broker URI</i> (for ActiveMQ only)	Type in the URI of the message broker. For intra-Route message handling, you can simply use the default URI <i>vm://localhost?broker.persistent=false</i> .
	<i>Use PooledConnectionFactory</i> (for ActiveMQ only)	Select this check box to use PooledConnectionFactory.
	<i>Max Connections</i> (for ActiveMQ only)	Specify the maximum number of connections of the PooledConnectionFactory. This field is available only when the Use PooledConnectionFactory check box is selected.
	<i>Max Active</i> (for ActiveMQ only)	Specify the maximum number of sessions per connection. This field is available only when the Use PooledConnectionFactory check box is selected.
	<i>Idle Timeout (in ms)</i> (for ActiveMQ only)	Specify the maximum waiting time (in milliseconds) before the connection breaks. This field is available only when the Use PooledConnectionFactory check box is selected.
	<i>Expiry Timeout (in ms)</i> (for ActiveMQ only)	Specify the time (in milliseconds) before the connection breaks since it is used for the first time. The default value is 60000. The expiry is disabled if 0 is specified. This field is available only when the Use PooledConnectionFactory check box is selected.
	<i>Codes</i> (for Customized only)	Write a piece of code to specify the JMS connection factory to be used for message handling.
	<i>Dependencies</i> (for Customized only)	Specify the library or libraries required by the JMS connection factory.
	<i>Host Name</i> (for WebSphere MQ only)	Type in the name or IP address of the host on which the IBM WebSphere MQ server is running.
	<i>Port</i> (for WebSphere MQ only)	Type in the port of the IBM WebSphere MQ server, 1414 by default.
	<i>Transport Type</i> (for WebSphere MQ only)	Select a type of message transport between the IBM WebSphere MQ server and the WebSphere MQ broker from Bindings , Bindings then Client , and Client .
	<i>Queue Manager</i> (for WebSphere MQ only)	Type in the name of the queue manager, or specify the name of the IBM WebSphere MQ server to find a queue manager.
	<i>Authentication</i> (for WebSphere MQ only)	On some operating systems, select this check box and provide the username and password for the IBM WebSphere MQ server to validate the access permission. This option is not required on Windows.

Related scenario:

	<i>Dependencies</i> (for WebSphere MQ)	Specify additional libraries required by the IBM WebSphere MQ broker, which are normally provided with the server installer.
Usage	cJMSTConnectionFactory cannot be added directly in a Route.	
Limitation	n/a	

Related scenario:

For a related scenario, see [section *Scenario 1: Sending and receiving a message from a JMS queue*](#).



Exception components

This chapter details the major components that you can find in the **Exception** family from the **Palette** of the **Mediation** perspective of *Talend Open Studio for ESB*.

The **Exception** family groups components that are dedicated to exception handling of Routes.

cErrorHandler



cErrorHandler properties


Component Family	Exception	
Function	cErrorHandler provides multiple strategies to deal with errors processing an Event Driven Consumer.	
Purpose	cErrorHandler offers different strategies for error handling during the processing.	
Basic settings	<i>Default Handler</i>	This error handler does not support a dead letter queue and will return exceptions back to the caller.
		Set Maximum Redeliveries: select this check box to set the number of redeliveries in the Maximum Redeliveries (int) field.
		Set Redelivery Delay: select this check box to set the initial redelivery delay (in milliseconds) in the Redelivery Delay (long) field.
		Set Retry Attempted Log Level: select this check box to select the log level in the Level list for log messages when retries are attempted.
		Asynchronized Delayed Redelivery: select this check box to allow asynchronous delayed redelivery.
		More Configurations by Code: select this check box to enter codes in the Code box for further configuration.
	<i>Dead Letter</i>	This handler supports attempting to redeliver the message exchange a number of times before sending it to a dead letter endpoint.
	Dead Letter Uri: select this check box to define the endpoint of the dead letter queue. Other parameters share the same meaning as those of the default handler.	
	<i>Logging Handler</i>	This handler logs the exceptions.
		Set Logger Name: select this check box to give a name to the logger in the Name field.
		Set Log Level: select this check box to decide the log level from the Level list.
Usage	cErrorHandler is used separately or as a middle or end component in a Route. If this component is used separately, it will handle errors in all sub-routes. If this component is used in the middle or end of a sub-route, it will only handle exceptions that happen in the components of this sub-route, either before or after the cErrorHandler .	
Limitation	n/a	

Scenario: Logging the exception thrown during a client/server talk

In this scenario, a Jetty server is started before a client browser requests access to it. Then an exception is thrown at the server side and logged by **cErrorHandler**.


Dropping and linking the components

1. Drop the following components from the **Palette** onto the workspace: **cMessagingEndpoint**, **cErrorHandler** and **cProcessor**, labelled as **Jetty_Server**, **Error_Handler** and **Throw_Exception** respectively.
2. Link **cMessagingEndpoint** and **cProcessor** using a **Row > Route** connection.

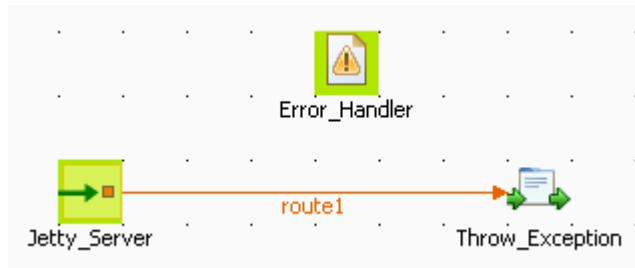

Configuring the components


1. Double-click **cErrorHandler** to open its **Basic settings** view in the **Component** tab.

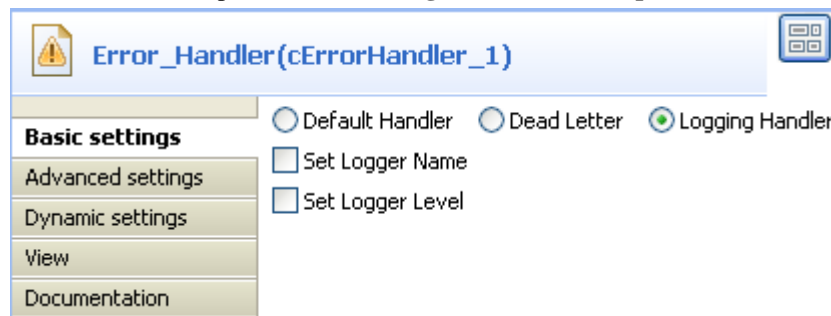


2. Select **Logging Handler** to log the exceptions that are thrown.
3. Double-click **cMessagingEndpoint** to open its **Basic settings** view in the **Component** tab.



4. In the **Uri** field, enter `jetty:http://localhost:8889/service` to specify the Jetty server.
5. Click **Advanced settings** for further setup.

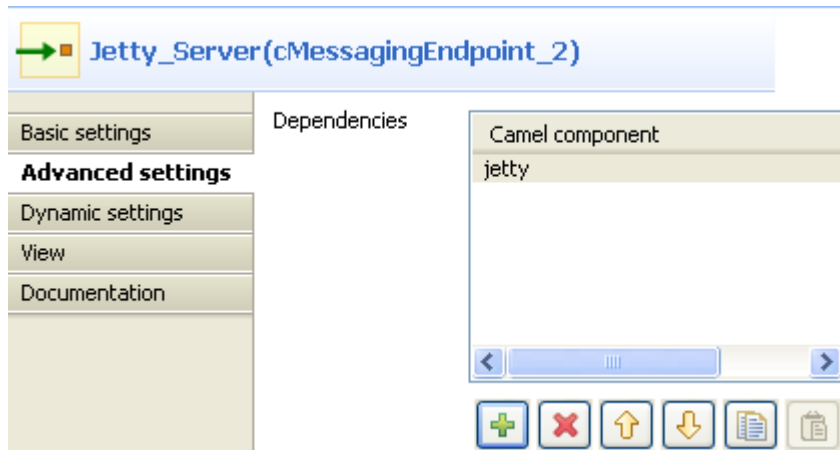

6. In the **Dependencies** table, click the [+] button to add a line and select `jetty` from the **Camel component** list.
7. Double-click **cProcessor** to open its **Basic settings** view in the **Component** tab.

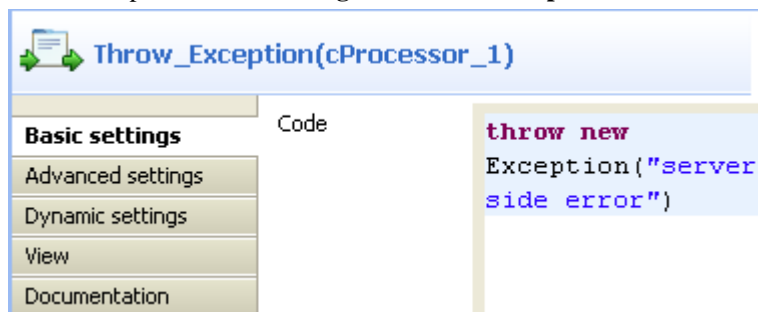

8. In the **Code** box, enter `throw new Exception("server side error")` to throw an exception.
9. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to check the generated code.

```

public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            errorHandler(loggingErrorHandler())

;
            from(uriMap.get("Jetty_Server"))
                .routeId("Jetty_Server").process(
                    new org.apache.camel.Processor() {
                        public void process(
                            org.apache.camel.Exchange exchange)
                            throws Exception {
                            throw new Exception(
                                "server side error");
                        }
                    }
                ).id("cProcessor_1");
        }
    };
}

```


As shown above, the route starts from the endpoint `Jetty_Server` and throws the exception of `server side error` via `cProcessor_1`.

- Press **F6** to execute the Route.

```
TestErrorHandler-ctx) started in 0.531 seconds
[statistics] connecting to socket on port 3743
[statistics] connected
```

The Jetty server has started.

- Launch an Internet browser and enter `http://localhost:8889/service` (the Jetty server URI configured above) in the address bar to access the server.

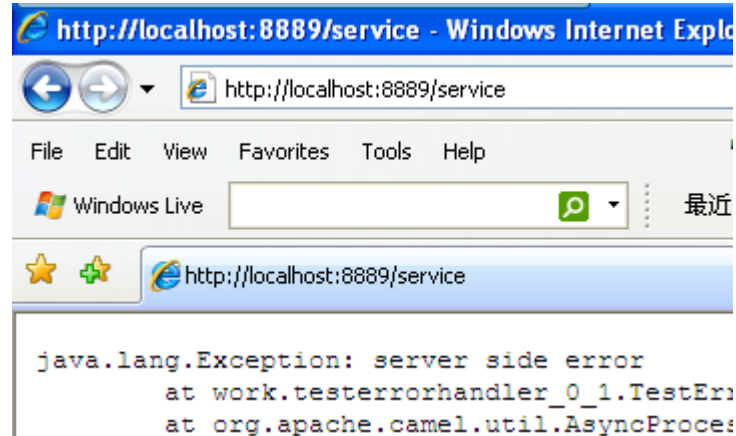

As shown above, the request failed due to the server error.

- Go to the Studio and check the results in the **Run** tab.

```
TestErrorHandler-ctx) started in 0.531 seconds
[statistics] connecting to socket on port 3743
[statistics] connected
[qtp32200294-21 ] Logger                                ERROR
Failed delivery for (MessageId:
ID-talend-andy-3694-1334888116328-0-2 on ExchangeId:
ID-talend-andy-3694-1334888116328-0-1). Exhausted after
delivery attempt: 1 caught: java.lang.Exception: server
side error
java.lang.Exception: server side error
    at
work.testerrorhandler_0_1.TestErrorHandler$1CamelImpl$1
$1.process(TestErrorHandler.java:229)
[file:/E:/TOS_ESB-r81689
-V5 1 0NR/workspace/.Java/classes/.]l
```

As shown above, **cErrorHandler** has logged the exception at the level of *ERROR*.

cIntercept




cIntercept properties

Component Family	Exception	
Function	cIntercept intercepts the messages in all the sub-routes on a Route before they are produced, and routes them in a new single sub-route without modifying the original ones. When this detour is complete, message routing to the originally intended target endpoints continues.	
Purpose	cIntercept intercepts each message sub-route and redirects it in another sub-route without modifying the original one. This can be useful at testing time to simulate error handling.	
Usage	cIntercept is a start component of a sub-route.	
Connections	<i>Row / Route</i>	Select the Route link to intercept all the messages of all the sub-routes listened to by the cIntercept .
	<i>Trigger / When</i>	Select the When link to filter the messages to intercept and click the Component view. In the Type list, select the type of language you will use to declare your condition. In the Condition field, type in the condition that will be used to filter the messages. All the messages that do not match this condition are dropped by default or can be retrieved with the Otherwise link to a different channel.
Limitation	To keep the original sub-routes untouched, cIntercept only be used in a separate sub-route .	

Scenario: Intercepting several routes and redirect them in a single new route

In this scenario, messages on two sub-routes are intercepted and routed along a new sub-route, which is then terminated before the original sub-routes continue.

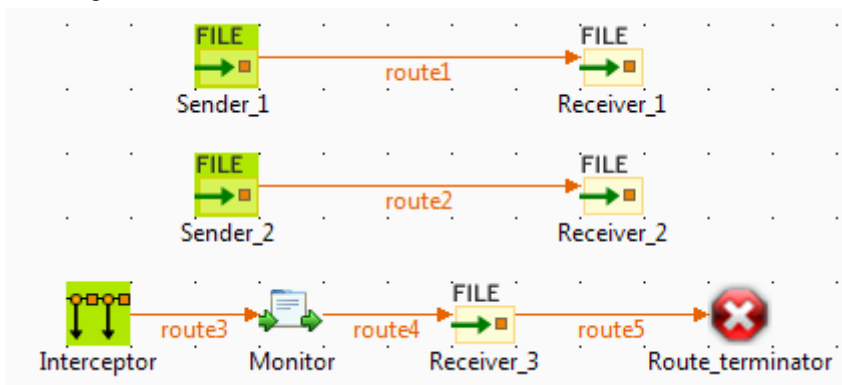

Dropping and linking the components


This scenario requires five **cFile** components, one **cIntercept** component, one **cProcessor** component, and one **cStop** component.

1. From the **Messaging** folder of the **Palette**, drop four **cFile** components onto the design workspace.
2. Connect the two pairs of **cFile** components using **Row > Route** connections. Messages on these two sub-routes will be intercepted.
3. From the **Exception** folder, drop a **cIntercept** component onto the design workspace.
4. From the **Processor** folder, drop a **cProcessor** component onto the design workspace.
5. From the **Messaging** folder, drop a fifth **cFile** component onto the design workspace.
6. From the **Miscellaneous** folder, drop a **cStop** component onto the design workspace.
7. Connect these four components one to the next using **Row > Route** connections. Along this sub-route, intercepted messages will be directed to a new endpoint before the entire Route is terminated.
8. Label the components to better identify their roles in the Route.


Configuring the components and connections

In this scenario, the **cIntercept** component intercepts all the messages on all the sub-routes as soon as the messages are sent and does not have properties to set. The **cStop** component stops the sub-route on which it is dropped before it completes and does not have properties to set. Therefore, you only need to configure the messaging endpoints and monitor components.

1. Double-click the **cFile** component labeled *Sender_1* to display its **Basic settings** view in the **Component** tab.

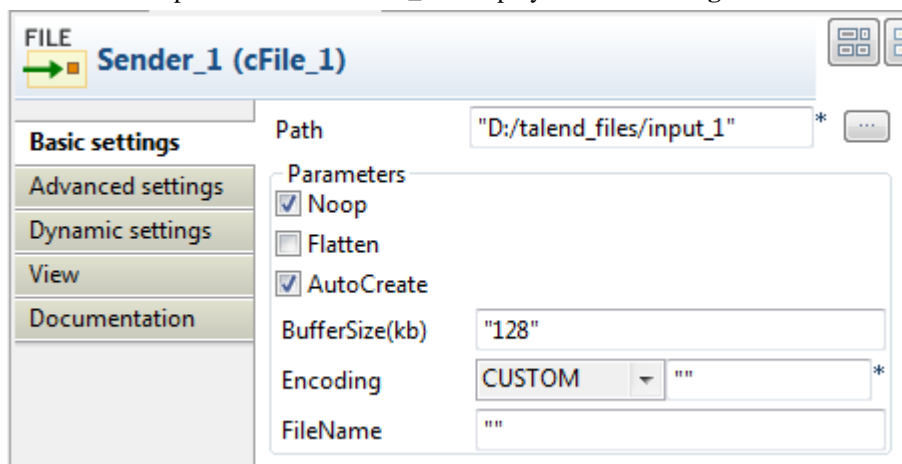


2. In the **Path** field, specify the file path to the first source you are going to send messages from, and leave the other parameters as they are.
3. Double-click the **cFile** component labeled *Receiver_1* to display its **Basic settings** view in the **Component** tab.

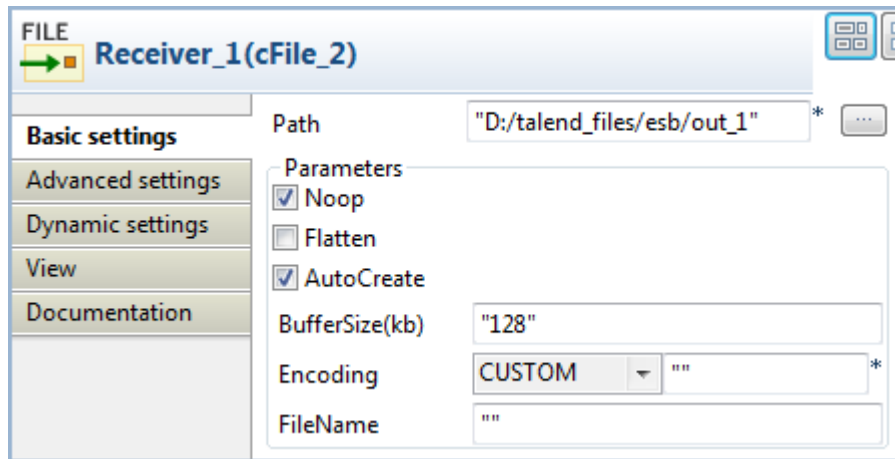

4. In the **Path** field, specify the file path to the first destination you are going to send messages to, and leave the other parameters as they are.
5. In the same way, set the **cFile** components labeled *Sender_2* and *Receiver_2* across the second sub-route.
6. Double-click the **cProcessor** component, which is labeled *Monitor*, to display its **Basic settings** view in the **Component** tab, and customize the code in the **Code** area to display the file names of the messages intercepted on the console:

```
System.out.println("Message intercepted: "+
exchange.getIn().getHeader("CamelFileName"));
```

7. Double-click the **cFile** component labeled *Receiver_3* to display its **Basic settings** view in the **Component** tab.

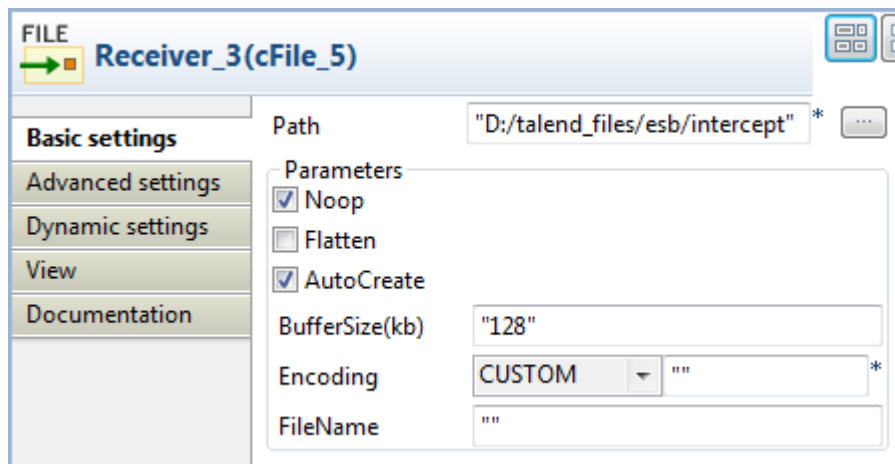

8. In the **Path** field, specify the file path to the destination for the intercepted messages, and leave the other parameters as they are.
9. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```


public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            intercept()
                .routeId("Interceptor")
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        System.out
                            .println("Message intercepted: "
                                + exchange
                                    .getIn()
                                    .getHeader(
                                        "CamelFileName"));
                    }
                })
                .id("cProcessor_1").to(
                    uriMap.get("Receiver_3")).id("cFile_5")
                .stop()
                .id("cStop_1");
            from(uriMap.get("Sender_1")).routeId("Sender_1").to(
                uriMap.get("Receiver_1")).id("cFile_2");
            from(uriMap.get("Sender_2")).routeId("Sender_2").to(
                uriMap.get("Receiver_2")).id("cFile_4");
        }
    };
    getCamelContexts().get(0).addRoutes(routeBuilder);
}

```

As shown in this piece of code, *Interceptor* intercepts all messages on route, the intercepted messages are directed *.to* the endpoint *Receiver_3*, and *cStop_1* terminates message routing before the messages are routed from the endpoint *Sender_1* *.to* the endpoint *Receiver_1* and from the endpoint *Sender_2* *.to* the endpoint *Receiver_2*.

2. Click the **Run** view and click the **Run** button to launch the execution of your Route. You can also press **F6** to execute it.

RESULT: Files are sent from the endpoints, caught by the **cIntercept** component, monitored by the **cProcessor** component and sent to a new endpoint, and then the original sub-routes are terminated before they can continue.

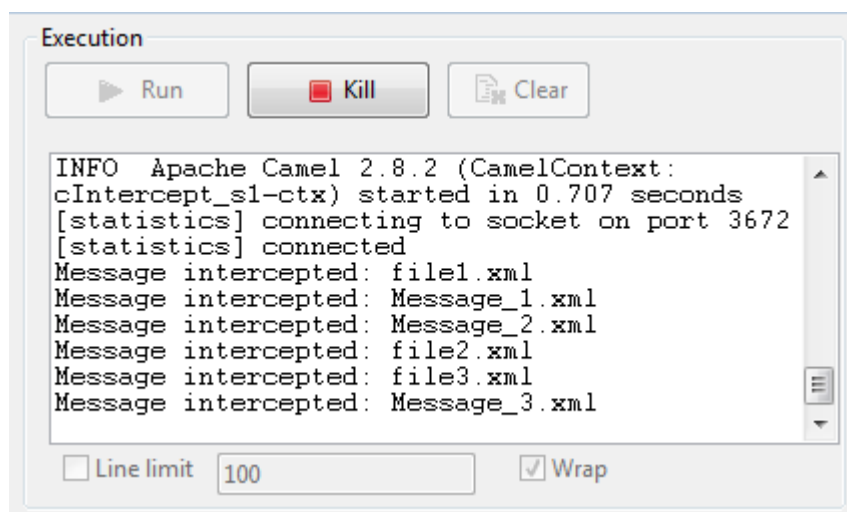

cOnException




cOnException properties

Component Family	Exception	
Function	cOnException catches the defined exceptions to trigger desired actions.	
Purpose	cOnException is designed to catch the defined exceptions for desired error handling.	
Basic settings	<i>Exceptions</i>	Click the plus button to add as many lines as needed in the table to define the exceptions to be caught.
	<i>Set a redelivering tries count</i>	Select this check box to set the maximum redelivering tries in the Maximum redelivering tries field.
	<i>Non blocking asynchronous behavior</i>	Select this check box to enable the feature of not blocking asynchronous behavior.
	<i>Exception behavior</i>	<p>None: select this option to take no action on the original route.</p> <p>Handle the exceptions: select this option to handle exceptions and break out the original route.</p> <p>Ignore the exceptions: select this option to ignore the exceptions and continue routing in the original route.</p>
	<i>Route the original input body instead of the current body</i>	Select this check box to route the original message instead of the current message that might be changed during the routing.
Usage	cOnException is generally used as a standalone component in a sub-route.	
Limitation	n/a	

Scenario: Using cOnException to ignore exceptions and continue message routing

In this scenario, a **cOnException** component is used to ignore an IO exception thrown by a Java bean so that the message is successfully routed to the destination in spite of the exception.

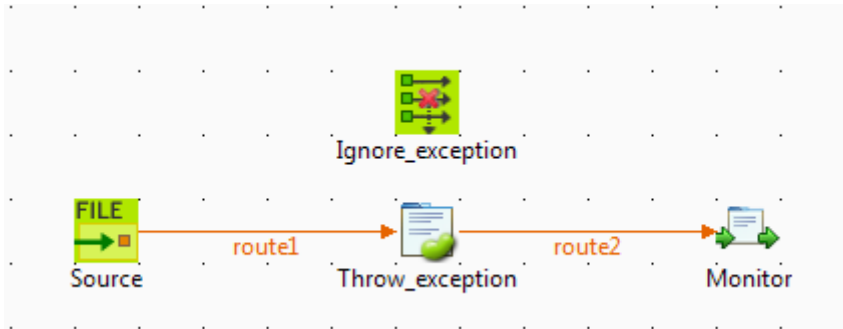


Dropping and linking the components

1. Drag and drop these components from the **Palette** onto the workspace: a **cOnException** component, a **cFile** component, a **cBean** component, and **cProcessor** component.
2. Link **cFile** to **cBean** using a **Row > Route** connection.
3. Link **cBean** to **cProcessor** using a **Row > Route** connection.
4. Label the components to better identify their roles in the Route.

Configuring the components


1. Double-click the **cOnException** component, which is labelled *Ignore_exception*, to open its **Basic settings** view in the **Component** tab.

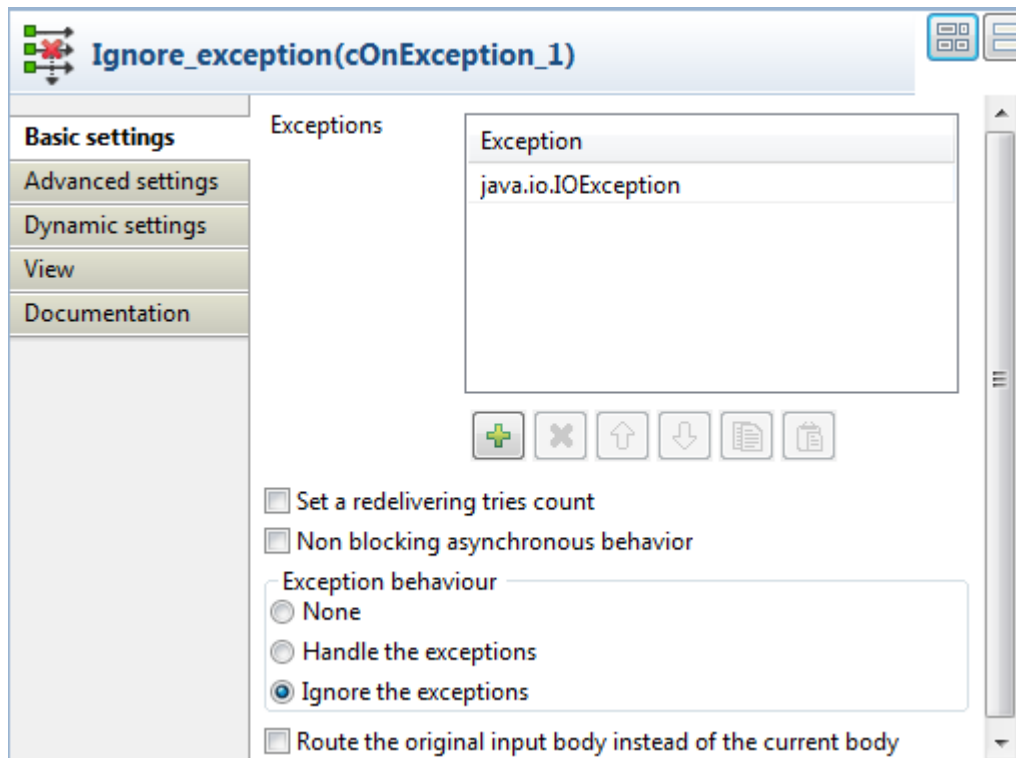


2. Click the plus button to add a line in the **Exceptions** table, and define the exception to catch. In this example, enter `java.io.IOException` to handle IO exceptions.

In the **Exception behaviour** area, select the **Ignore the exceptions** option to ignore exceptions and let message routing continue. Leave the other parameters as they are.

3. Double-click the **cFile** component, which is labelled *Source*, to open its **Basic settings** view in the **Component** tab.

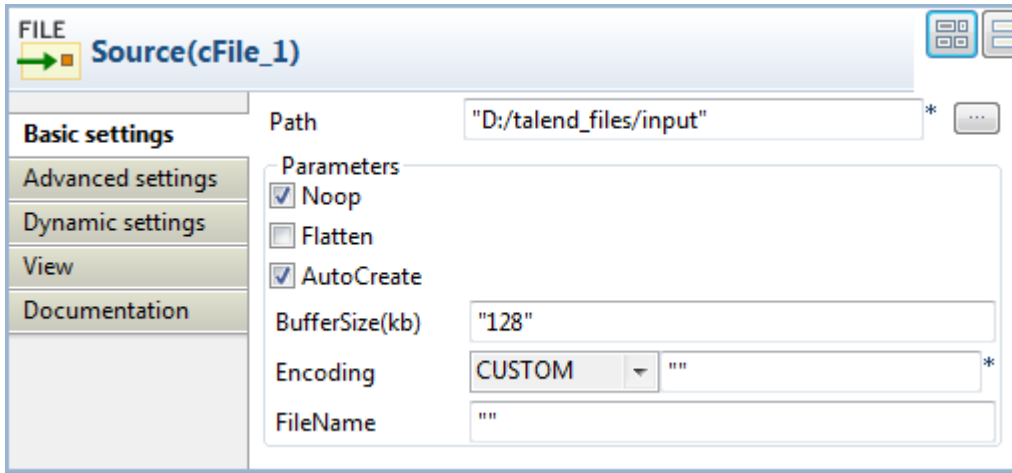

4. In the **Path** field, enter the path of the message source, and leave the other parameters as they are.
5. Double-click the **cBean** component, which is labelled *Throw_exception*, to open its **Basic settings** view in the **Component** tab.

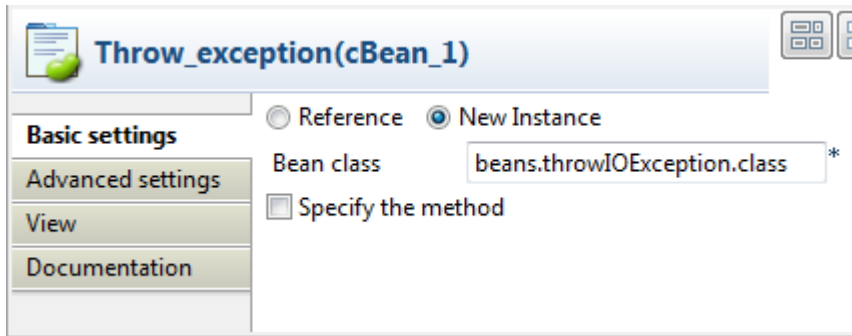

6. Select **New Instance** and in the **Bean class** field, enter the name of the bean to throw an IO exception, *beans.throwIOException.class* in this scenario.

Note that this bean has already been defined in the **Code** node of the **Repository** and it looks like this:

```

package beans;

import java.io.IOException;


import org.apache.camel.Exchange;

public class throwIOException {

    /**
     * @throws IOException
     */
    public static void helloExample(String message, Exchange exchange) throws
    IOException {
        throw new IOException("An IOException has been caught");
    }
}
    
```

For more information about creating and using Java Beans, see *Talend Open Studio for ESB User Guide*.

7. Double-click the **cProcessor** component, which is labelled *Monitor*, to open its **Basic settings** view in the **Component** tab.

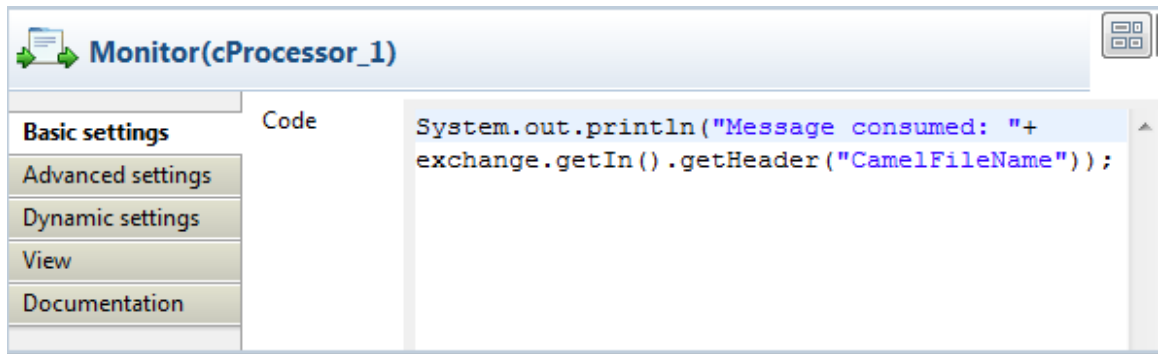

8. In the **Code** area, customize the code to display the file name of the consumed message on the **Run** console:

```
System.out.println("Message consumed: " +
exchange.getIn().getHeader("CamelFileName"));
```

9. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to check the generated code.

```
}


public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            onException(java.io.IOException.class)

                .continued(true).routeId("Ignore_exception");
            from(uriMap.get("Source")).routeId("Source").bean(
                beans.throwIOException.class).id("cBean_1")
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        System.out.println("Message consumed: "
                            + exchange.getIn().getHeader(
                                "CamelFileName"));
                    }
                });
        }
    }).id("cProcessor_1");
};
getCamelContexts().get(0).addRoutes(routeBuilder);
}
```

As shown above, `Ignore_exception` handles any IO exception thrown by `.bean(beans.throwIOException.class)` invoked by `cBean_1`, so that messages from the endpoint `Source` can be successfully routed onwards (`continued(true)`) in spite of the exception.

2. Press **F6** to execute the Route.

The route gets executed successfully and the files from the source are successfully routed to the destination.

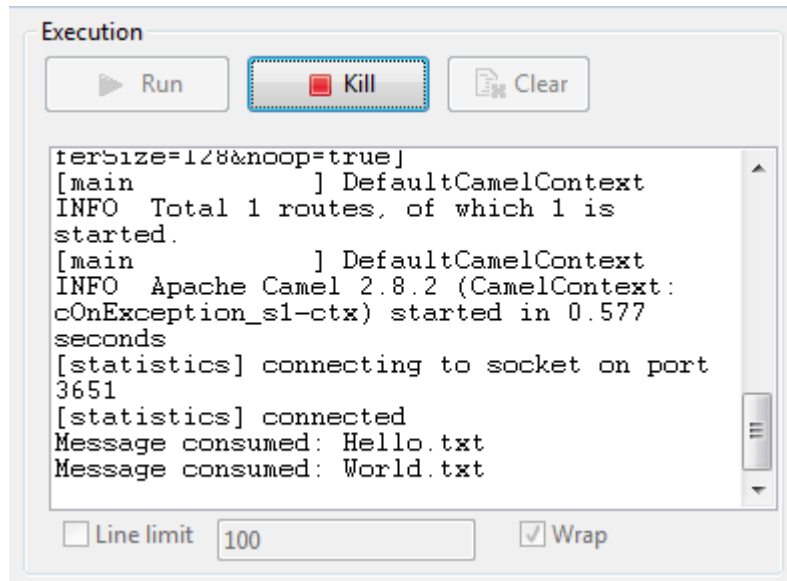




3. Change the exception handling option in the **cOnException** component or deactivate the component and run the Route again.

The exception thrown by the Java bean prevents the messages from being routed successfully.

cTry




cTry properties

Component Family	Exception	
Function	cTry offers Java's exception handling abilities by building Try/Catch/Finally blocks.	
Purpose	cTry is designed to build Try/Catch/Finally blocks to handle exceptions.	
Usage	cTry is used as a middle component in a Route.	
Connections	<i>Try</i>	<p>Select this link to isolate the part of your Route that is likely to throw an exception or exceptions.</p> <p> When the Try link is followed by multiple components, a compile error may occur showing "The method doCatch() is undefined for the type ExpressionNode". In this case, use a cJavaDSLProcessor component to end the Try block with the code <code>.endDoTry()</code> as a workaround.</p>
	<i>Catch</i>	<p>Select this link to catch any exception thrown in the Route.</p> <p>In the Exceptions field, type in an expression to filter the type of exception to catch.</p> <p> This link can be used only when a Try link is present.</p>
	<i>Finally</i>	<p>Select link to execute final instructions regardless of any exceptions that may occur in the Route.</p> <p> This link can be used only when a Try link is present.</p>
	<i>Route</i>	Select this link to route all the messages from the sender to the next endpoint.
Limitation	n/a	

Scenario: Using cTry to build Try/Catch/Finally blocks for exception handling

In this scenario, the content of each file sent from the message sender to the receiver is checked and if any file does not meet the content requirement, an exception is thrown and the relevant information is displayed on the console.

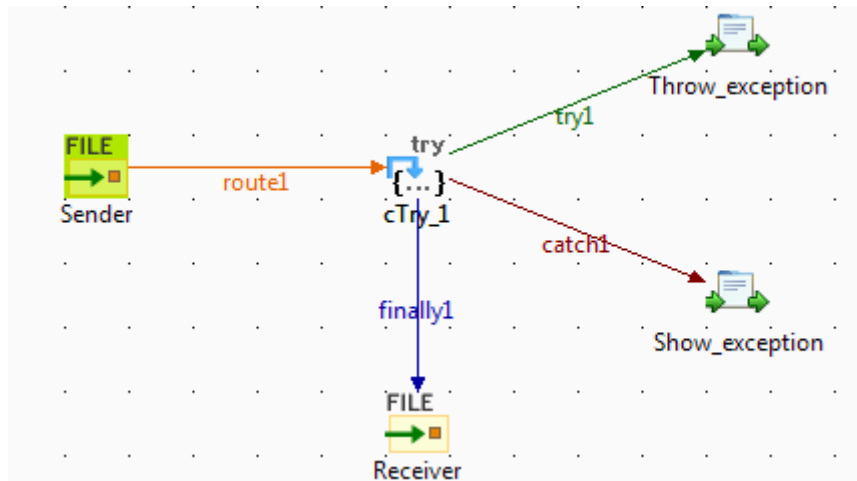


Dropping and linking components

1. From the **Messaging** folder of the **Palette**, drop two **cFile** components onto the design workspace, one as the message sender and the other as the message receiver.
2. From the **Exception** folder, drop a **cTry** component onto the design workspace to build Try, Catch and Finally blocks.
3. From the **Processor** folder, drop two **cProcessor** components onto the design workspace.
4. Link the **cFile** component serving as message sender to the **cTry** component using a **Row > Route** connection.
5. Link the **cTry** component to one **cProcessor** using a **Row > Try** connection. This **cProcessor** component will throw an exception if any file coming via this connection does not contain the required content.
6. Link the **cTry** component to the other **cProcessor** component using a **Row > Catch** connection to catch the exception. This **cProcessor** component will display the information related to the exception and the file name that does not contain the required content.
7. Link the **cTry** component to the receiving **cFile** component using a **Row > Finally** connection.
8. Label the components according to their roles in the Route.

Configuring the components and connections

1. Double-click the **cFile** component labeled *Sender* to open its **Basic settings** view in the **Component** tab.

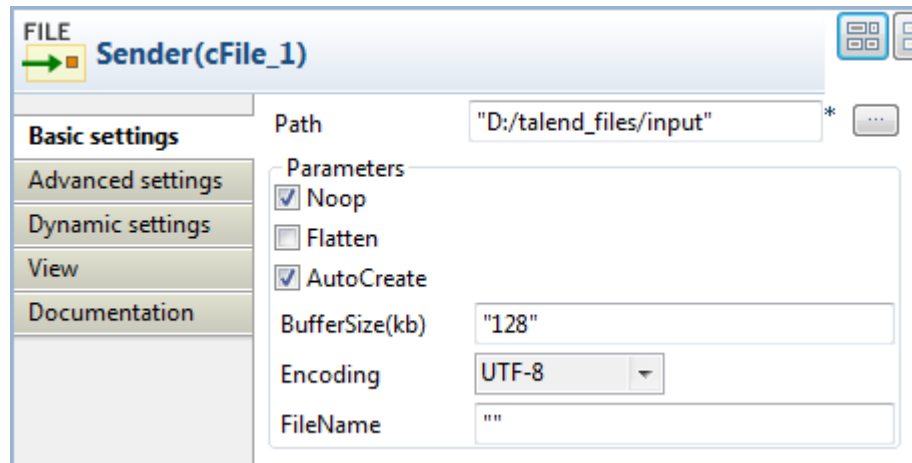


2. In the **Path** field, fill in or browse to the path to the folder that holds the source files.
3. From the **Encoding** list, select the encoding type of your source files. Leave the other parameters as they are.
4. Repeat these step to define the output file path and encoding type in the **Basic settings** view of the other **cFile** component, which is labeled *Receiver*.
5. Double-click the **cProcessor** component labeled *Throw_exception* to open its **Basic settings** view in the **Component** tab, and customize the code in the **Code** area to throw an exception and display relevant information if any file coming via the **try** connection does not meet the content requirement, as follows:

```
String body = exchange.getIn().getBody(String.class);
System.out.println("\nTrying: "+body);
Exception e = new Exception("Only 'Talend Integration Solutions' is acceptable.
Please check the file:");
if(!"Talend Integration Solutions".equals(body)){
    throw e;
}else{
    System.out.println("File is good.");
}
```

6. Click the **catch** connection and then the **Component** tab to open its **Basic settings** view, and fill the **Expression** field with an expression to specify the type of exception to catch.

In this scenario, fill in `Exception.class` to catch any exception thrown.

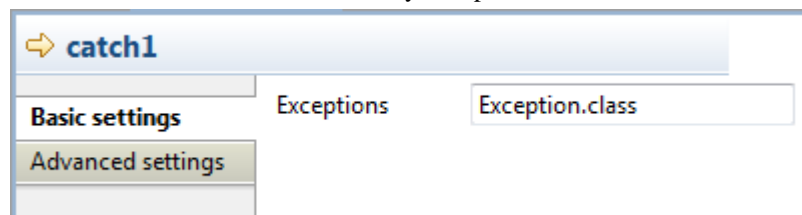

7. Double-click **cProcessor** component labeled *Show_exception* to open its **Basic settings** view in the **Component** tab, and customize the code in the **Code** area to display the exception information and the related file name, as follows:

```
System.out.println(exchange.getProperty("CamelExceptionCaught")+
" " + exchange.getIn().getHeader("CamelFileName"));
```

8. Click **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to check the generated code.


```

public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Sender"))
                .routeId("Sender")
                .id("cTry_1")
                .doTry()
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        String body = exchange.getIn().getBody(
                            String.class);
                        System.out.println("\nTrying: " + body);
                        Exception e = new Exception(
                            "Only 'Talend Integration Solutions' is acceptable. Please check the file:");
                        if (!"Talend Integration Solutions"
                            .equals(body)) {
                            throw e;
                        } else {
                            System.out.println("File is good.");
                        }
                    }
                })
                .id("cProcessor_1").doCatch(Exception.class)
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        System.out
                            .println(exchange
                                .getProperty("CamelExceptionCaught")
                                + " "
                                + exchange
                                    .getIn()
                                    .getHeader(
                                        "CamelFileName"));
                    }
                })
                .id("cProcessor_2").doFinally().to(
                    uriMap.get("Receiver").id("cFile 2"));
        }
    };
}

```

As shown above, while messages are routed from the sender to the receiver, `.doTry()`, `.doCatch()` and `.doFinally()` blocks are built by `cTry_1`. Thus, when any file does not meet the content requirement, an exception is thrown and caught, before each file is finally routed to the receiver.

2. Press **F6** to execute the Route.

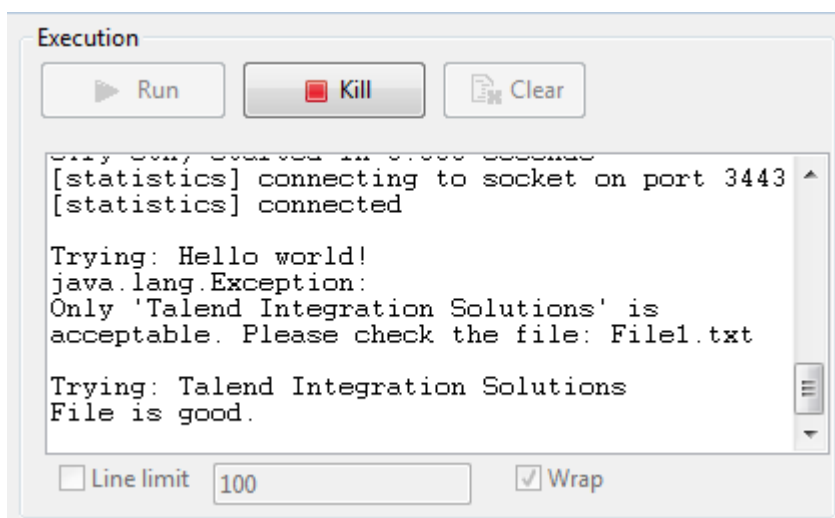

RESULT: When a file that does not meet the content requirement is detected, an exception is thrown, and the exception information is displayed on the console. Regardless of the exception, all the files from the sender are sent to the receiver.



Messaging components

This chapter details the major components that you can find in the **Messaging** family from the **Palette** of the **Mediation** perspective of *Talend Open Studio for ESB*.




The **Messaging** family groups components that provide access to messaging endpoints, file systems, repository of code, and so on.

cCXF



cCXF properties

Component Family	Messaging	
Function	cCXF provides integration with Apache CXF for connecting to JAX-WS services.	
Purpose	cCXF is used to provide or consume Web services.	
Basic settings	<i>Service/Address</i>	The service endpoint URL where the Web service is provided. In case cCXF is used to consume a Web service and the endpoint lookup shall use the Service Locator (the Use Service Locator check box is selected), the URL needs to be "locator://anyAddress/".
	<i>Service/Type</i>	Select which type you want to use to provide Web service. Either wsdlURL or serviceClass . wsdlURL : Select this type to provide the Web service from a WSDL file. Choose Repository or File to provide the Web service from a Route Resource or the file system. serviceClass : Select this type to provide the Web service from an SEI (Service Endpoint Interface) Java class.
	<i>Service/WSDL File</i>	This field appears when the wsdlURL service type is selected. If the WSDL file is from the file system, browse to or enter the path to the WSDL file. If the WSDL file is from a Route Resource, click [...] and select the one you want from the Resources tree view. The Version list appears allowing you to choose from all the versions of the Route Resource.
	<i>Service/Service Class</i>	This field appears when the serviceClass service type is selected. Enter the name of the service class to be used to provide the Web service.
	<i>Service/Dataformat</i>	The exchange data style. POJO , PAYLOAD , RAW , or CXF_MESSAGE . POJOs (Plain Old Java Objects) are the Java parameters to the method being invoked on the target server. PAYLOAD is the message payload, the contents of the <code>soap:body</code> . RAW is the raw message that is received from the transport layer without SAM (Service Activity Monitor) support. CXF_MESSAGE is the raw message that is received from the transport layer with SAM support.
	<i>Service</i>	Select this check box to specify the service port. This option is useful especially when there are multi service ports in the WSDL or service class.
	<i>Service Name</i>	The service name this service is implementing. It maps to the <code>wsdl:service@name</code> in the format of <code>ns:SERVICE_NAME</code> where <code>ns</code> is a namespace prefix valid at this scope.
	<i>Port Name</i>	The endpoint name this service is implementing. It maps to the <code>wsdl:port@name</code> , in the format of <code>ns:PORT_NAME</code> where <code>ns</code> is a namespace prefix valid at this scope.

	<i>ESB Features/Use Service Activity Monitor</i>	<p>Captures events and stores this information to facilitate in-depth analysis of service activity and track-and-trace of messages throughout a business transaction. This can be used to analyze service response times, identify traffic patterns, perform root cause analysis and more.</p> <p> This feature is not supported when MESSAGE is used as the processing mode. When MESSAGE is selected in the Dataformat field, the Use Service Activity Monitor check box is disabled.</p>
	<i>ESB Features/Use Service Locator</i>	<p>Provides service consumers with a mechanism to discover service endpoints at runtime without specifying the physical location of the endpoint. Additionally, it allows service providers to automatically register and unregister their service endpoints at the Service Locator.</p> <p> For service consumers, the URL additionally needs to be set to "locator://anyAddress/" in the CXF Configuration / Address field.</p> <p>The Custom Properties table appears when the Use Service Locator check box is selected. Click  to add as many properties as needed to the table. Enter the name and the value of each property in the Property Name field and the Property Value field respectively to identify the service. For more information, see <i>Talend ESB Runtime Configuration Guide</i> for how to install and configure the Service Locator.</p>
Advanced settings	<i>Arguments</i>	Set the optional arguments in the corresponding table. Click [+] as many times as required to add arguments to the table. Then click the corresponding Value field and enter a value. See the site http://camel.apache.org/cxf.html for available URI options.
Usage	cCXF can be a start, middle or end component in a Route.	
Limitation	Multiple cCXF components with the same label in a Route is not supported.	

Scenario 1: Providing a Web service using cCXF from a WSDL file

In this scenario, a Web service is produced by a cCXF component using a WSDL file.



Dropping and linking the components

This use case requires one cCXF component and one cProcessor component.


1. From the **Palette**, expand the **Messaging** folder, and drop a **cCXF** component onto the design workspace.
2. Expand the **Processor** folder, and drop a **cProcessor** component onto the design workspace.
3. Right-click the **cCXF** component, select **Row > Route** from the contextual menu and click the **cProcessor** component.

- Label the **cCXF** component for better identification of its functionality.

Configuring the components

In this scenario, the **cProcessor** component is used only to enable the **cCXF** component to function as a service producer. Therefore, it does not need any configuration.

- Double-click the **cCXF** component to display its **Basic settings** view in the **Component** tab.

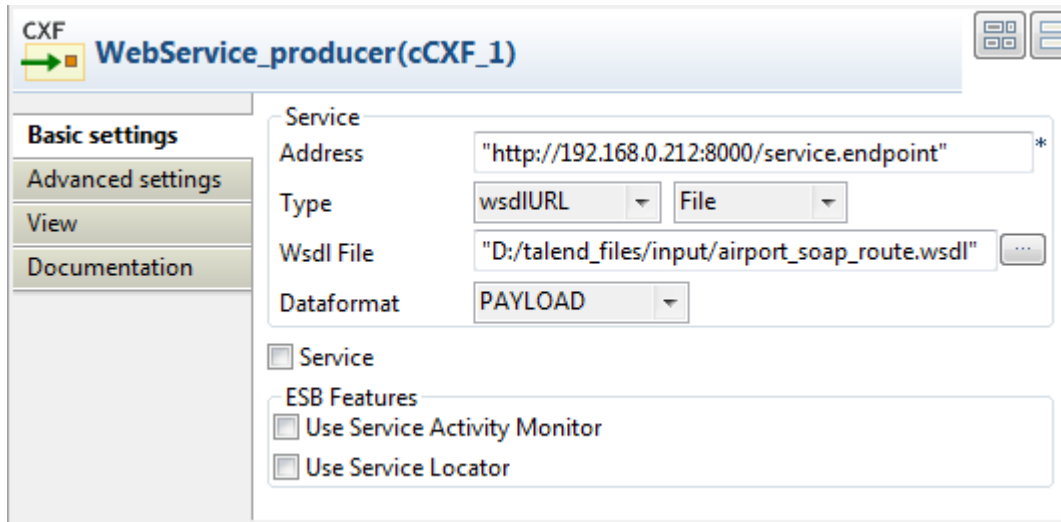

- In the **Address** field, type in the service endpoint URL for the Web service to be provided, *http://192.168.0.212:8000/service.endpoint* in this example.
- From the **Type** list, select **wsdlURL** to enable producing the Web service from a WSDL file.
- In the **Wsd File** field, browse to or type in the path to the WSDL file to be used.
- From the **Dataformat** list, select **PAYLOAD** mode for the **wsdlURL** data format.
- Press **Ctrl+S** to save your route.

Viewing code and executing the Route


- Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```
protected void initUriMap() {
    uriMap = new java.util.HashMap<String, String>();
    uriMap.put("WebService_producer", "cxf://"
        + "http://192.168.0.212:8000/service.endpoint" + "?wsdlURL="
        + "D:/talend_files/input/airport_soap_route.wsdl"
        + "&dataFormat=PAYLOAD");
}
```

As shown in the code, the **cCXF** component labelled `WebService_producer` produces the Web service from an input file `airport_soap_route.wsdl` using the endpoint URL `http://192.168.0.212:8000/service.endpoint`.

- Click the **Run** view to display it and click the **Run** button to launch the execution of your Route. You can also press **F6** to execute it.

RESULT: The service is successfully started. You can access it from a Web browser using the service endpoint URL followed by `?wsdl`.

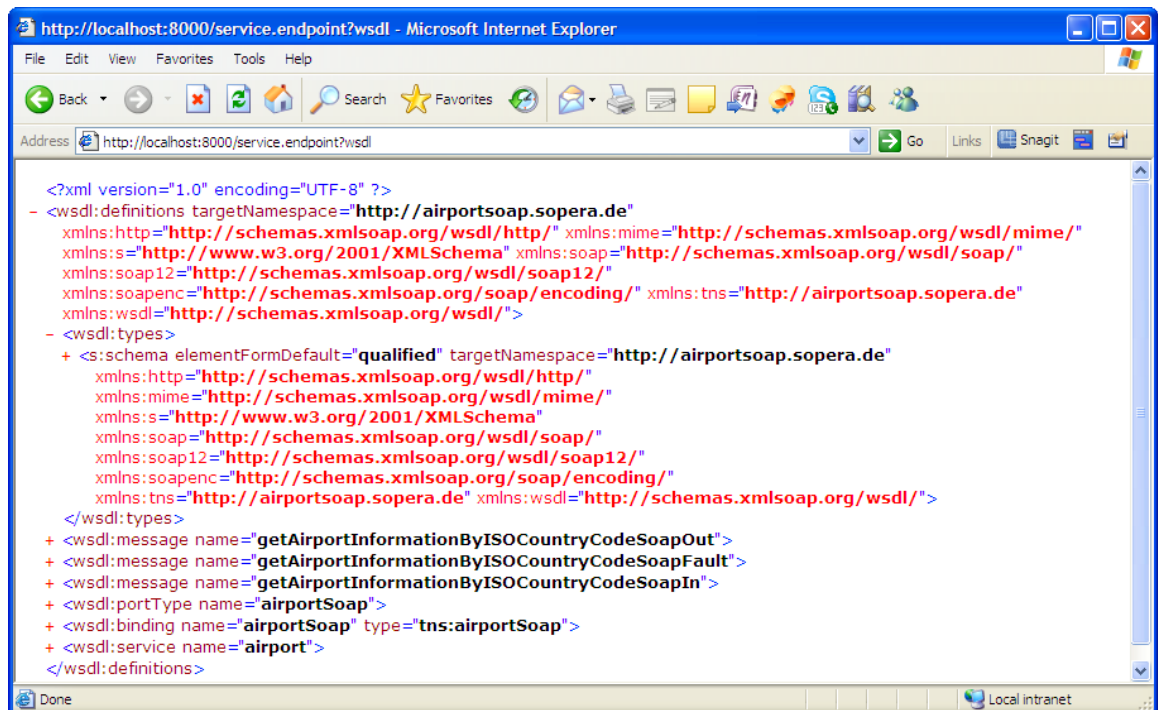


Scenario 2: Providing a Web service using cCXF from a Java class


In this scenario, a Web service is provided from a Java class file using a **cCXF** component.

Creating a Java class

1. From the repository tree view, expand the **Code** node and right click the **Beans** node. In the contextual menu, select **Create Bean**.

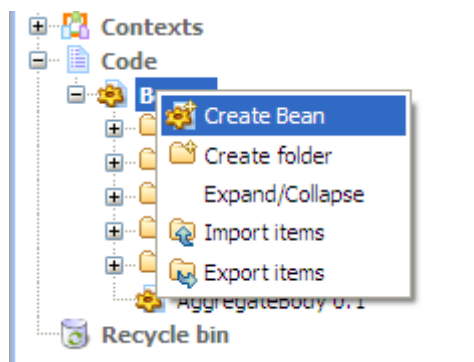

2. The **New Bean** wizard opens. In the **Name** field, type in a name for the bean, for example, `CXFdemobean`. Click **Finish** to close the wizard.

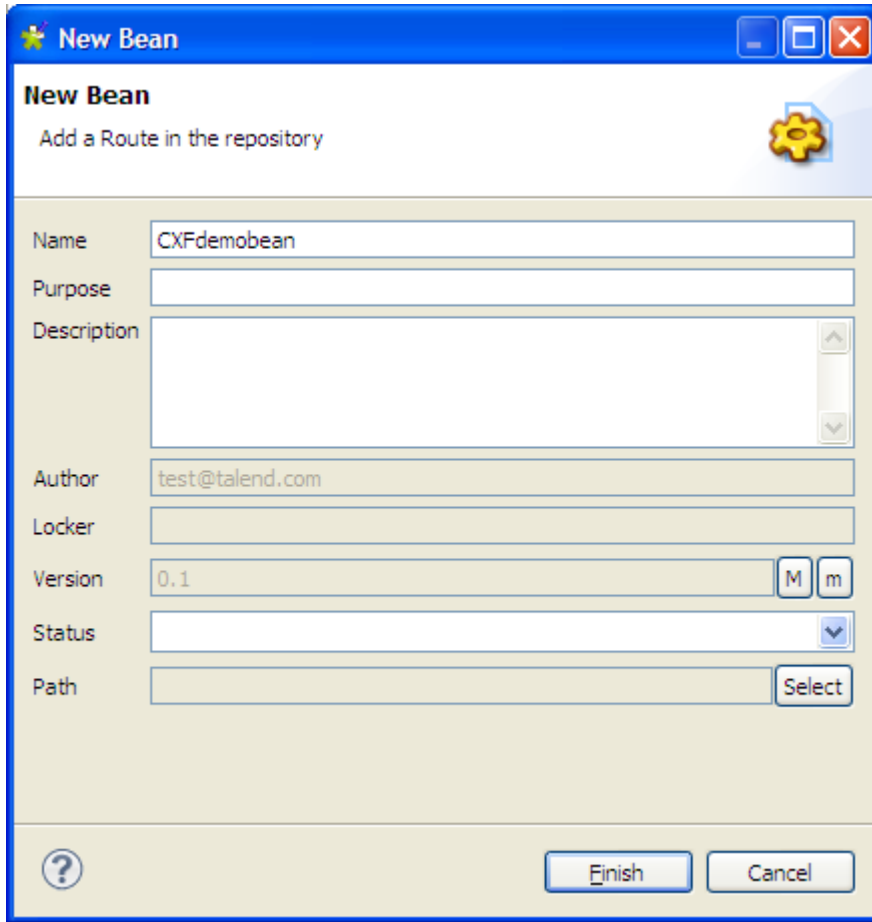


3. Change the class type to interface, change the return type to `string` and remove the message body.

```
package beans;

public interface CXFdemobean {
    public String helloExample(String message) ;
}
```

4. Press **Ctrl+S** to save your bean.

Dropping and linking the components

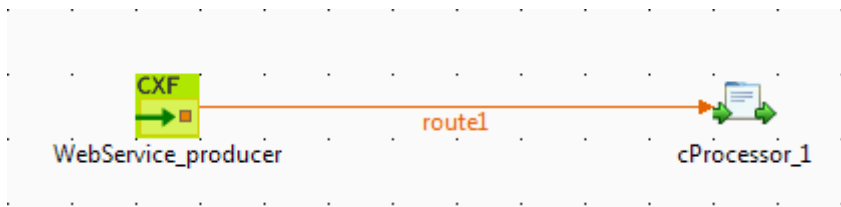

This use case requires one **cCXF** component and one **cProcessor** component.


1. From the **Palette**, expand the **Messaging** folder, select the **cCXF** component and drop it onto the design workspace.
2. Expand the **Processor** folder, select the **cProcessor** component and drop it onto the design workspace.
3. Right-click the **cCXF** component, select **Row > Route** in the contextual menu and click the **cProcessor** component.

- Label the components for better identification of their functionality.

Configuring the components

In this scenario, the **cProcessor** component is used only to enable the **cCXF** component to function as a service producer. Therefore, it does not need any configuration.

- Double-click the **cCXF** component to display its **Basic settings** view in the **Component** tab.

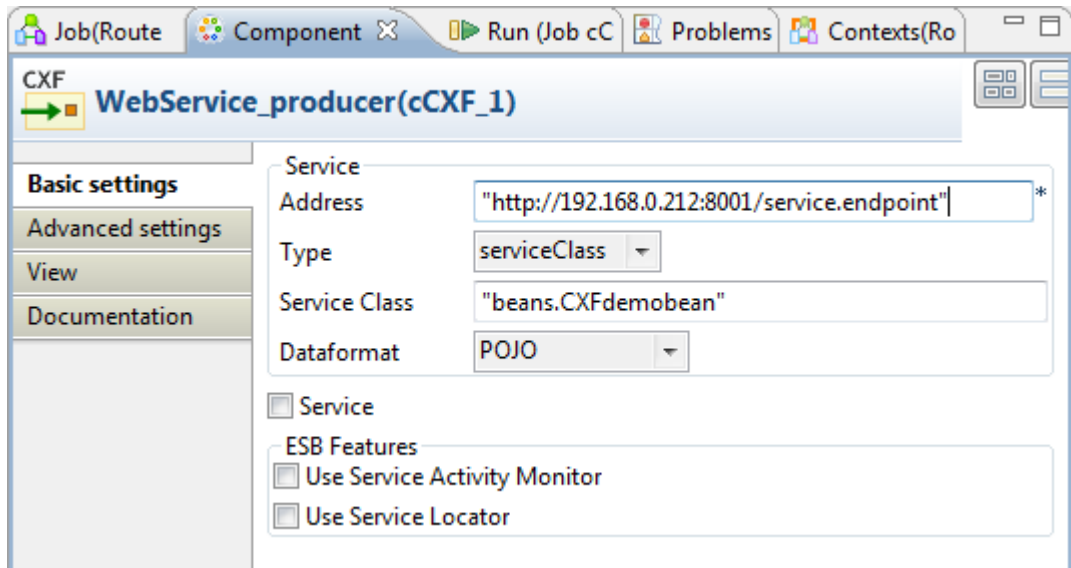

- In the **Address** field, type in the service endpoint URL for the Web service to be provided, *http://192.168.0.212:8001/service.endpoint* in this example.
- From the **Type** from, select **serviceClass** to start the Web service from a Java class.
- In the **Service Class** field, specify the predefined bean class, *CXFdemobean* in this example.
- From the **Dataformat** list, select **POJO** as the **serviceClass** service data format.
- Press **Ctrl+S** to save your Route.

Viewing code and executing the Route


- Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```
protected void initUriMap() {
    uriMap = new java.util.HashMap<String, String>();
    uriMap.put("WebService_producer", "cxf://"
        + "http://192.168.0.212:8001/service.endpoint"
        + "?serviceClass=" + "beans.CXFdemobean" + "&dataFormat=POJO");
}
```

As shown in the code, the **cCXF** component labelled *WebService_producer* produces the Web service from an predefined bean *beans.CXFdemobean* using the endpoint URL *http://192.168.0.212:8001/service.endpoint*.

- Click the **Run** view to display it and click the **Run** button to launch the execution of your Route. You can also press **F6** to execute it.

RESULT: The service is successfully started. You can access it from a Web browser using the service endpoint URL followed by ?wsdl.

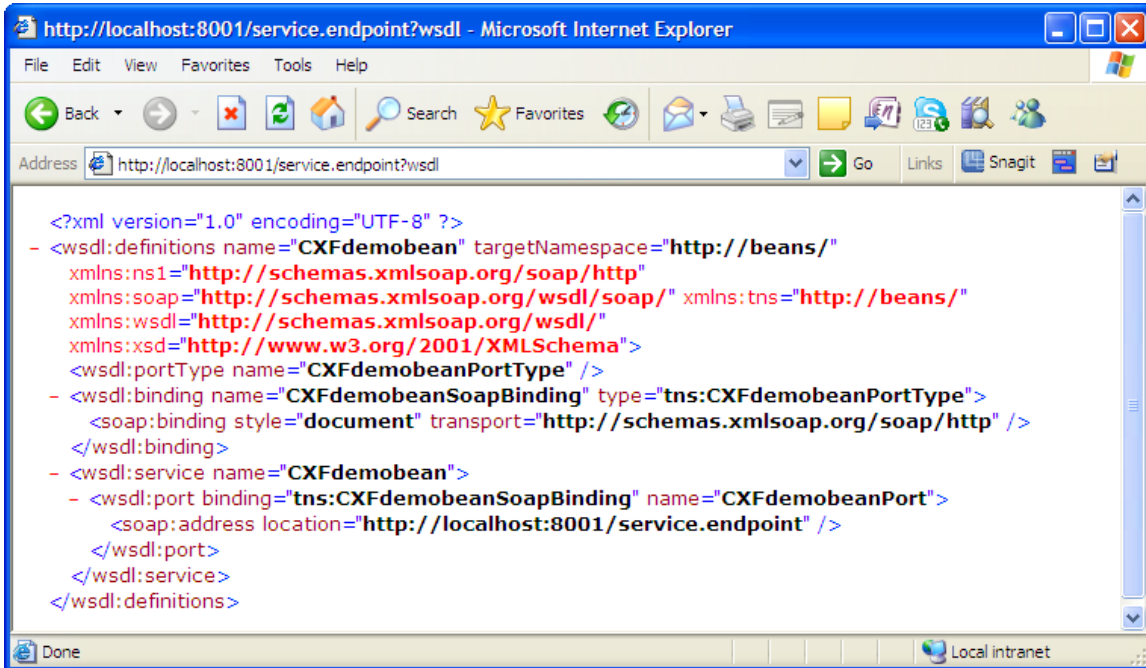


Scenario 3: Providing a Web service from a Route Resource


In this scenario, a Web service is provided from a Route Resource using a cCXF component.

Creating a Route Resource

1. From the **Repository** tree view, right-click the **Resources** node and select **Create Resource** from the context menu.

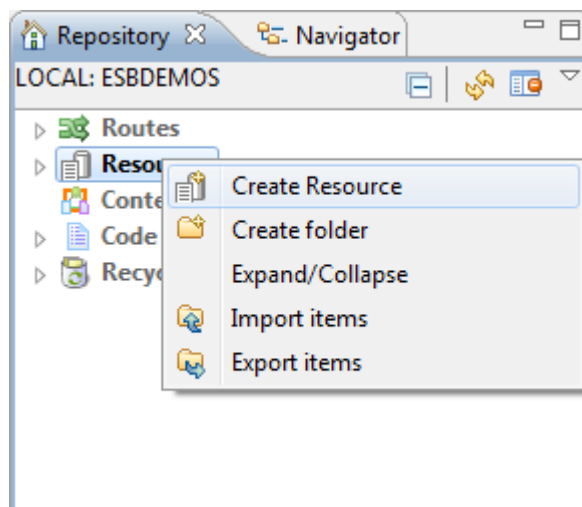

2. The **New Route Resource** wizard opens. In the **Name** field, type in a name for the Resource, for example, *DemoServiceWsdL*. Click **Finish** to close the wizard.

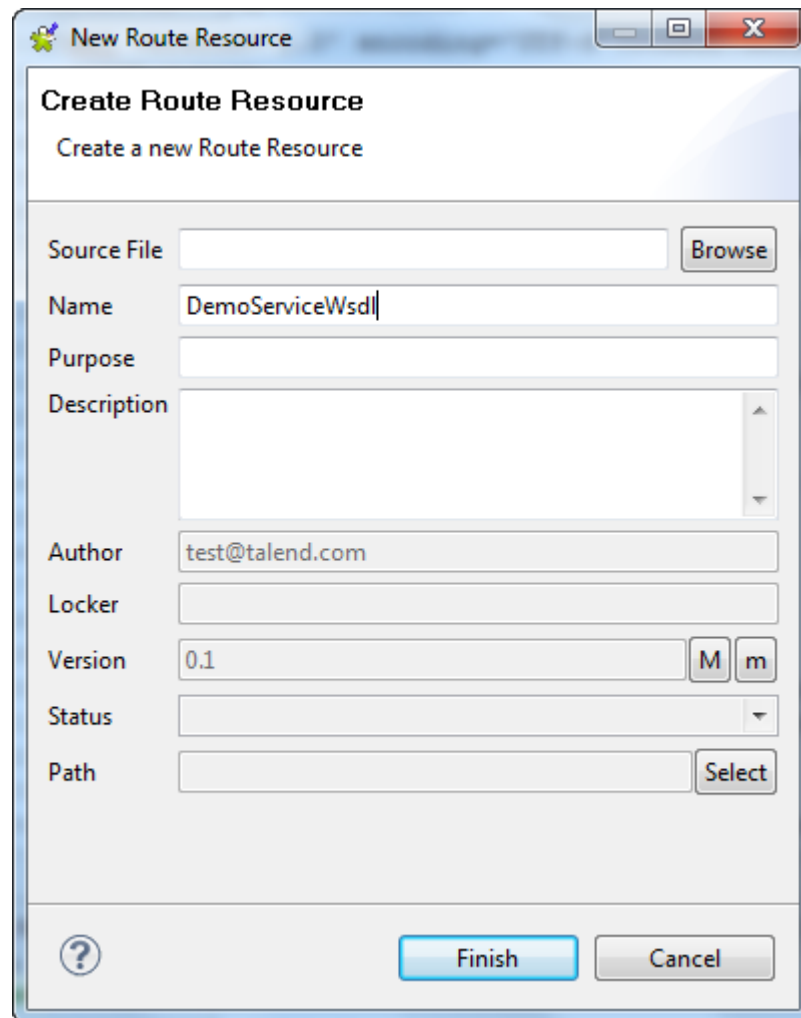

3. Browse to an existing WSDL file from the local file system and click **Finish**.
4. Press **Ctrl+S** to save your Route Resource.

Dropping and linking the components




This use case requires a **cCXF** and a **cProcessor** component.

1. From the **Palette**, expand the **Messaging** folder, and drop a **cCXF** component onto the design workspace.
2. Expand the **Processor** folder, and drop a **cProcessor** component onto the design workspace.
3. Right-click the **cCXF** component, select **Row > Route** from the contextual menu and click the **cProcessor** component.
4. Label the **cCXF** component for better identification of its functionality.

Configuring the components

In this scenario, the **cProcessor** component is used only to enable the **cCXF** component to function as a service producer. Therefore, it does not need any configuration.

1. Double-click the **cCXF** component to display its **Basic settings** view in the **Component** tab.

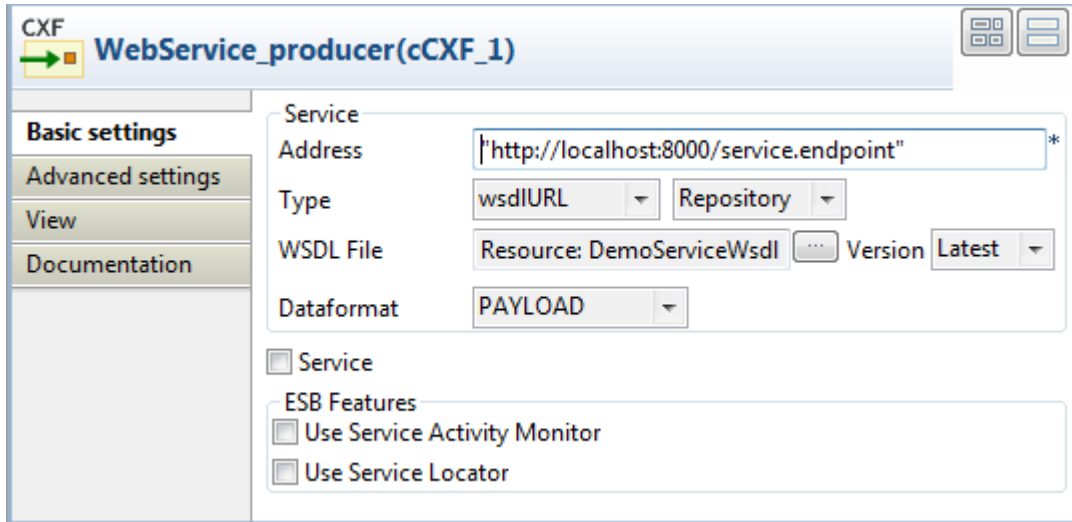

2. In the **Address** field, type in the service endpoint URL for the Web service to be provided, *http://localhost:8000/service.endpoint* in this example.
3. From the **Type** list, select **wsdlURL** and use the **Repository** property type to start the Web service from the Route Resource that we have created.
4. In the **WSDL File** field, click the [...] button and select *DemoServiceWsdll* from the Resources tree view. Click **OK** to close the wizard.
5. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route


1. Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```
protected void initUriMap() {
    uriMap = new java.util.HashMap<String, String>();
    uriMap.put("WebService_producer_cCXF_1", "cxf://"
        + "http://localhost:8000/service.endpoint" + "?wsdlURL="
        + "classpath:DemoServiceWsdll" + "&dataFormat=PAYLOAD");
}
```

As shown in the code, the **cCXF** component labelled *WebService_producer* produces the Web service from an predefined Route Resource *DemoServiceWsdll* using the endpoint URL *http://localhost:8000/service.endpoint*.

2. Click the **Run** view to display it and click the **Run** button to launch the execution of your Route. You can also press **F6** to execute it.

RESULT: The service is successfully started. You can access it from a Web browser using the service endpoint URL followed by *?wsdl*.

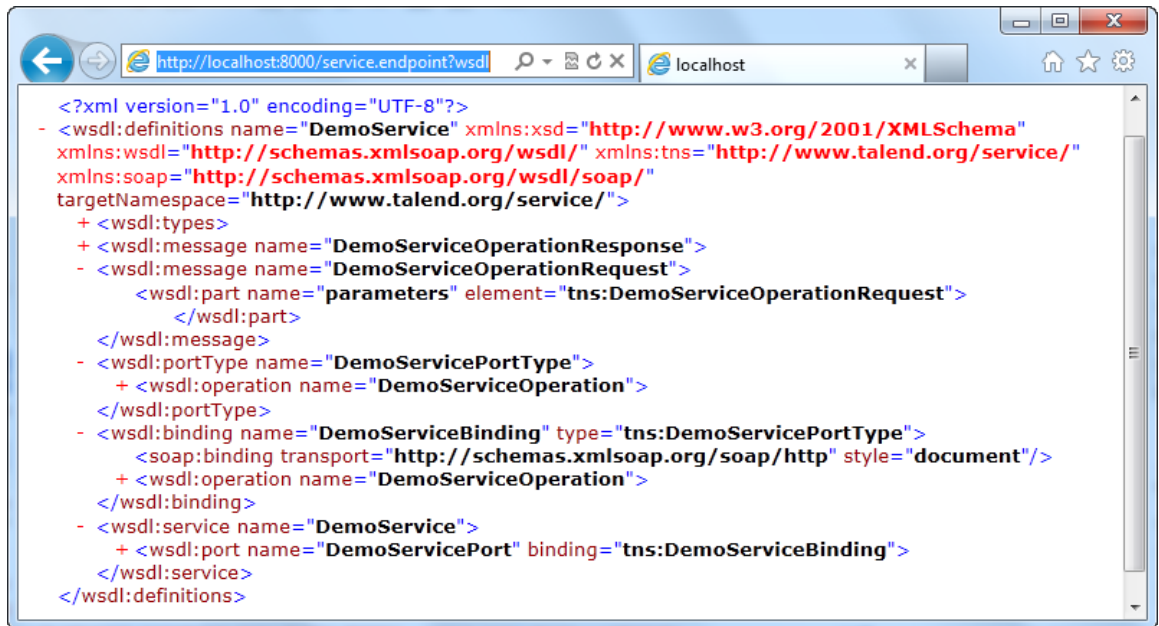A screenshot of a web browser window showing a WSDL file. The address bar contains the URL 'http://localhost:8000/service.endpoint?wsdl'. The page content is XML code for a WSDL definition named 'DemoService'. The code includes namespaces for XSD, WSDL, and TNS, and defines a service with a port named 'DemoServicePort' and a binding named 'DemoServiceBinding'. The binding is of type 'tns:DemoServicePortType' and uses a SOAP binding with transport 'http' and style 'document'. The service has two messages: 'DemoServiceOperationResponse' and 'DemoServiceOperationRequest'. The request message has a part named 'parameters' of type 'tns:DemoServiceOperationRequest'.

```
<?xml version="1.0" encoding="UTF-8"?>
- <wsdl:definitions name="DemoService" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/" xmlns:tns="http://www.talend.org/service/"
  xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
  targetNamespace="http://www.talend.org/service/">
  + <wsdl:types>
  + <wsdl:message name="DemoServiceOperationResponse">
  - <wsdl:message name="DemoServiceOperationRequest">
    <wsdl:part name="parameters" element="tns:DemoServiceOperationRequest">
    </wsdl:part>
  </wsdl:message>
  - <wsdl:portType name="DemoServicePortType">
    + <wsdl:operation name="DemoServiceOperation">
    </wsdl:portType>
  - <wsdl:binding name="DemoServiceBinding" type="tns:DemoServicePortType">
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http" style="document"/>
    + <wsdl:operation name="DemoServiceOperation">
    </wsdl:binding>
  - <wsdl:service name="DemoService">
    + <wsdl:port name="DemoServicePort" binding="tns:DemoServiceBinding">
    </wsdl:service>
  </wsdl:definitions>
```

cDataset




cDataset properties

Component Family	Messaging	
Function	The cDataset component creates a new dataset or references an existing dataset to send or receive messages.	
Purpose	The cDataset component allows you to create a new dataset or reference an existing dataset to send or receive messages.	
Basic settings	<i>Id</i>	The ID of the Dataset bean.
	<i>Produce Delay</i>	Specify a delay in milliseconds to cause producers to pause.
	<i>Consume Delay</i>	Specify a delay in milliseconds to cause consumers to pause.
	<i>Preload Size</i>	Specify how many messages should be sent before the Route completes its initialization.
	<i>Initial Delay</i>	Specify the time in milliseconds to wait before starting sending messages.
	<i>Minimum Rate</i>	Specify the least number of messages that the dataset should contain before starting sending messages.
	<i>Register new Bean</i>	Select this check box to register a new bean.
	<i>Bean Class</i>	Enter the class of the bean. This field appears when the Register new Bean check box is selected.
	<i>Arguments</i>	Set the optional arguments in the corresponding table. Click [+] as many times as required to add arguments to the table. This table appears when the Register new Bean check box is selected.
Usage	cDataset can be a start, middle, or end component of a Route.	
Limitation	n/a	

Scenario: Using cDataset to receive messages

In this scenario, a **cDataset** component is used to receive messages triggered by a **cTimer**.

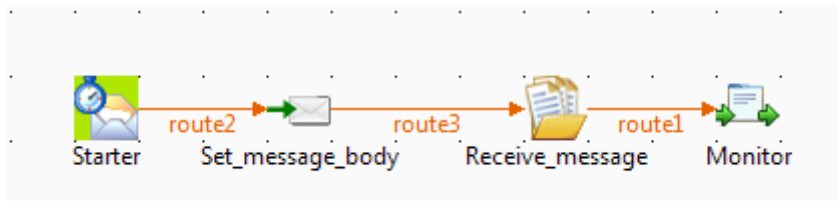


Dropping and linking the components

1. From the **Messaging** folder of the **Palette**, drag and drop a **cTimer** and a **cDataset** component onto the design workspace.


2. From the **Transformation** folder, drag and drop a **cSetBody** component onto the design workspace.
3. From the **Processor** folder, drag and drop one **cProcessor** component onto the design workspace.
4. Connect the components using **Row > Route** connections.
5. Label the components to better identify their roles in the Route, as shown above.

Configuring the components


1. Double-click the first **cTimer** component, which is labelled *Starter*, to open its **Basic settings** view in the **Component** tab.

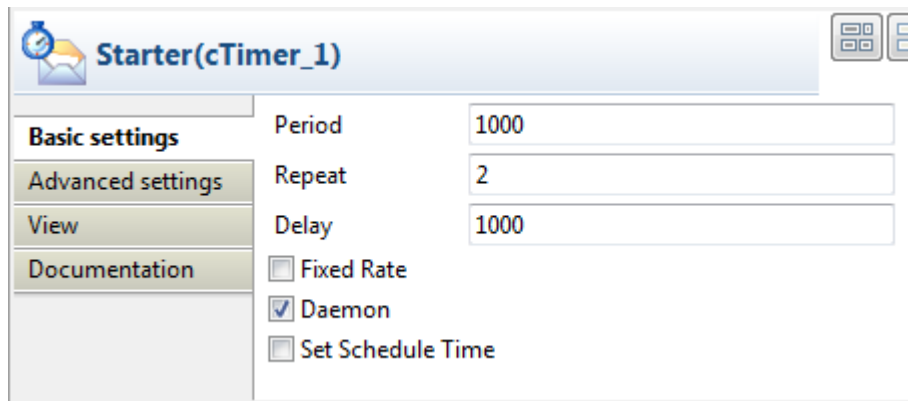

2. In the **Repeat** field, enter 2 to generate the message exchange twice. Keep the default settings of the other options.
3. Double-click the **cSetBody** component, which is labelled *Set_message_body*, to open its **Basic settings** view in the **Component** tab.

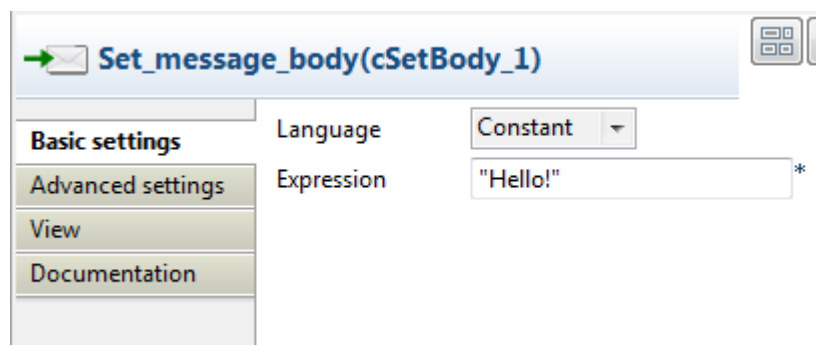


4. Select **Constant** in the **Language** list and enter "Hello!" in the **Expression** field as the message body.
5. Double-click the **cDataset** component, which is labelled *Receive_message*, to open its **Basic settings** view in the **Component** tab.

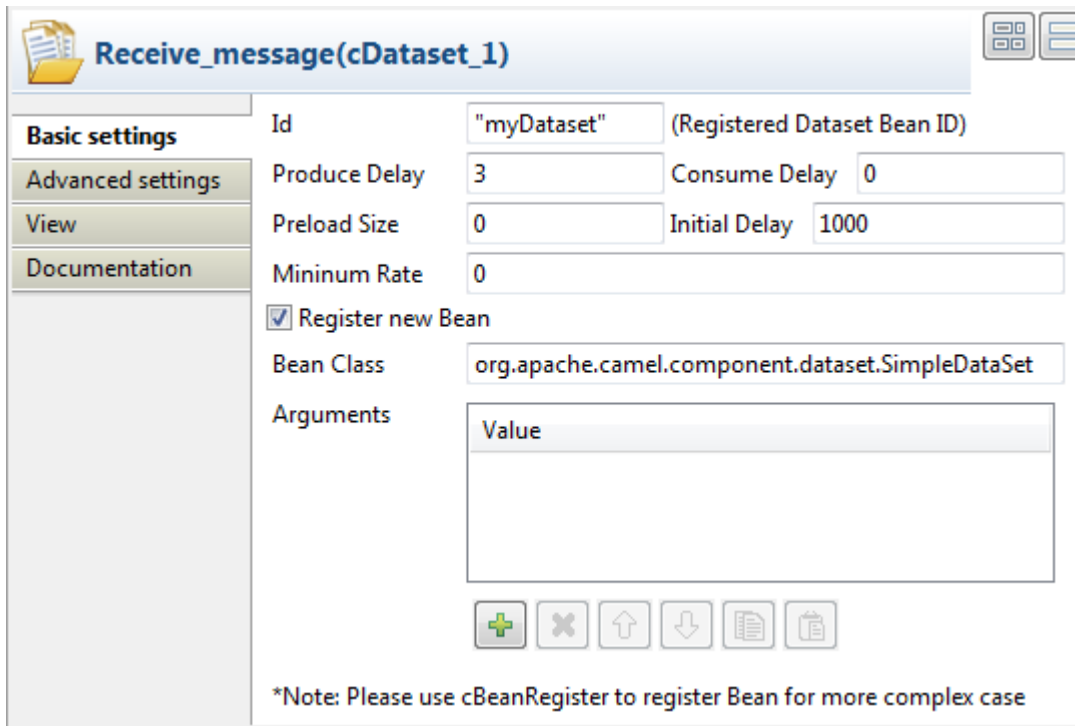

6. In the **Id** field, enter "myDataset" as the dataset bean ID. Keep the default settings of the other options.

In the **Bean Class** field, the default implementation that is shipped by Camel `org.apache.camel.component.dataset.SimpleDataSet` is set. In this use case, a new dataset bean is registered.

7. Double-click the first **cProcessor** component, which is labelled *Monitor*, to open its **Basics settings** view in the **Component** tab.

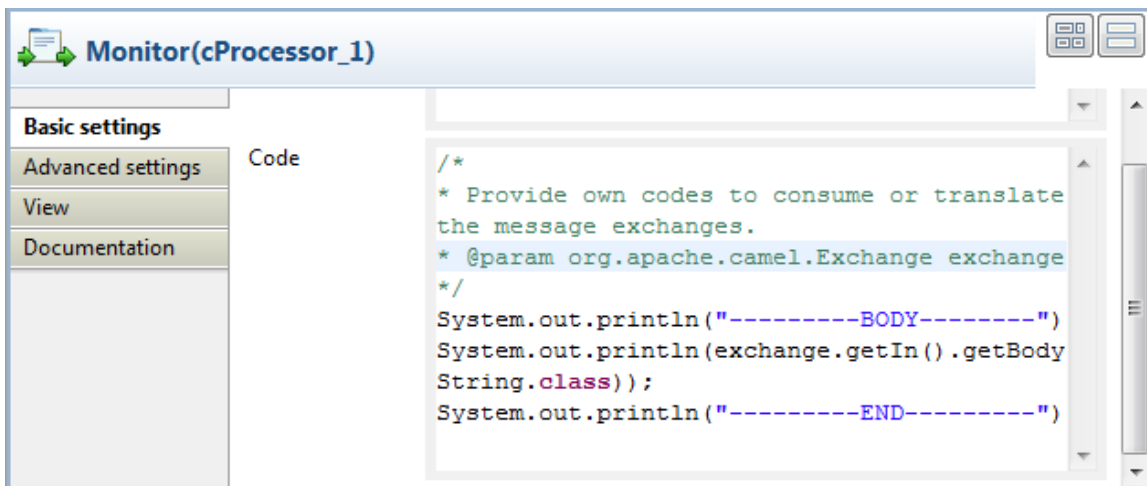

8. In the **Code** area, customize the code to show the body of the message exchanges.

```
System.out.println("-----BODY-----");
System.out.println(exchange.getIn().getBody(String.class));
System.out.println("-----END-----")
```

9. Press **Ctrl+S** to save your Route.

Viewing the code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```


public void configure() throws Exception {
    from(uriMap.get("Starter_cTimer_1"))
        .routeId("Starter_cTimer_1").setBody()
        .constant("Hello!").id("cSetBody_1")
        .to(uriMap.get("Receive_message_cDataset_1"))
        .id("cDataset_1")
        .process(new org.apache.camel.Processor() {
            public void process(
                org.apache.camel.Exchange exchange)
                throws Exception {
                /*
                 * Provide own codes to consume or translate the
                 * message exchanges.
                 *
                 * @param org.apache.camel.Exchange exchange
                 */
                System.out.println("-----BODY-----");
                System.out.println(exchange.getIn().getBody(
                    String.class));
                System.out.println("-----END-----");
            }
        })
        .id("cProcessor_1");
}

```

As shown in the code, the Route is built from the Starter_cTimer_1 endpoint, set the message body as "Hello!" by cSetBody_1, routed .to cDataset_1, and then processed by cProcessor_1.

2. Press **F6** to execute the Route.

RESULT: The message body is displayed twice in the execution console.

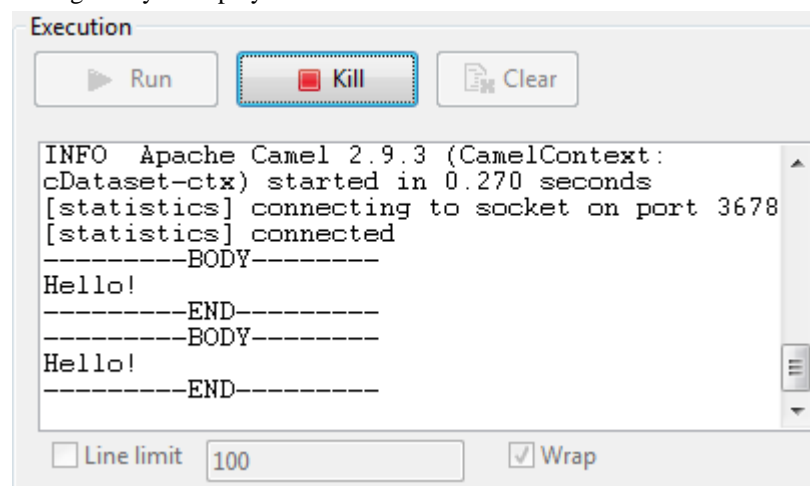

cFile



cFile properties

Component Family	Messaging	
Function	cFile provides access to file systems.	
Purpose	cFile allows files to be processed by any other Camel components or messages from other components to be saved to disk.	
Basic settings	<i>Path</i>	Path to the file or files to be accessed or saved.
	<i>Parameters/Noop</i>	Select this check box to keep the file or files in the original folder after being read.
	<i>Parameters/Flatten</i>	Select this check box to flatten the file name path to strip any leading paths. This allows you to consume recursively into sub-directories, but when you, for example, write the files to another directory, they will be written in a single directory.
	<i>Parameters/AutoCreate</i>	Select this check box to create the directory specified in the Path field automatically if it does not exist.
	<i>Parameters/BufferSize(kb)</i>	Write buffer sized in bytes.
	<i>Encoding</i>	Specify the encoding of the file, ISO-8859-15 , UTF-8 , or CUSTOM .
	<i>FileName</i>	The name of the file to be processed. Use this option if you want to consume only a single file in the specified directory.
Advanced settings	<i>Advanced</i>	Set the optional arguments in the corresponding table. Click [+] as many times as required to add arguments to the table. Then click the corresponding Value field and enter a value. See the site http://camel.apache.org/file2.html for available URI options.
Usage	cFile can be a start, middle or end component in a Route.	
Limitation	n/a	

Scenario: Reading files from one directory and writing them to another

In this scenario, an input cFile component is configured to visit a local file directory and send the files in the directory to an output cFile component which writes the files in another directory.




Dropping and linking the components


1. From the **Palette**, expand the **Messaging** folder and select the **cFile** component. Drop one as the input component and another as the output component onto the design workspace.
2. Right-click the input **cFile** component, select **Row > Route** in the contextual menu and click the output **cFile** component.
3. Label the components to better identify their respective functionality.

Configuring the components

1. Double-click the input **cFile** component to display its **Basic settings** view in the **Component** tab.

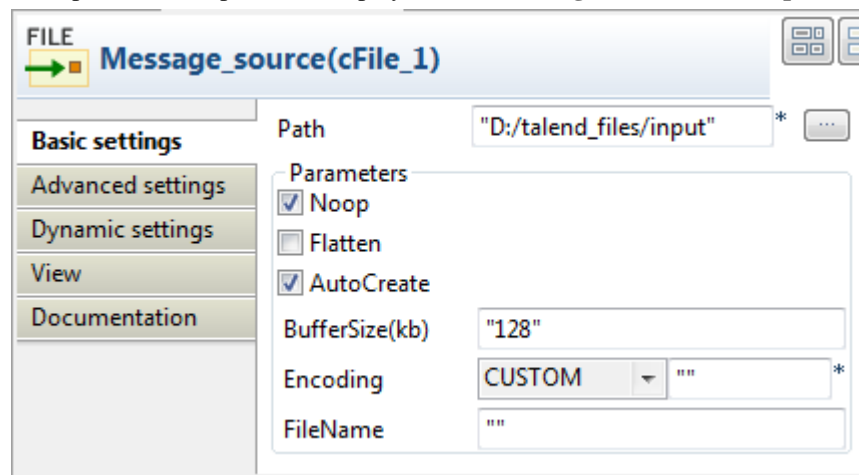

2. In the **Path** field, browse to or enter the input file path, and leave the other parameters as they are.
3. Double-click the output **cFile** component to display its **Basic settings** view in the **Component** tab.

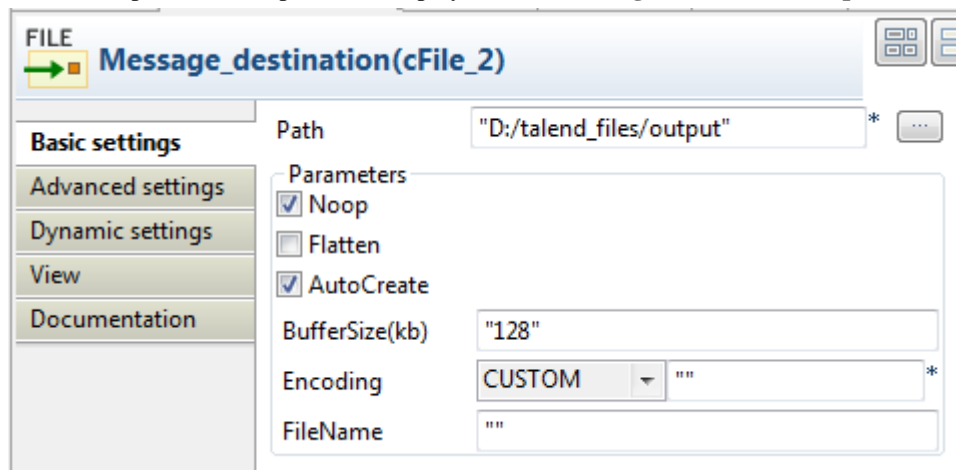

4. In the **Path** field, browse to or enter the output file path, as shown above. Leave the other parameters as they are.
5. Press **Ctrl+S** to save your route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Message_source")).routeId(
                "Message_source").to(
                uriMap.get("Message_destination"))
                .id("cFile_2");
        }
    };
    getCamelContexts().get(0).addRoutes(routeBuilder);
}
```

As shown in the code, a message route is built from one endpoint to another.

2. Click the **Run** view to display it and click the **Run** button to launch the execution of your Route. You can also press **F6** to execute it.

RESULT: The input files are written to specified output directory.

cFtp



cFtp properties

Component Family	Messaging	
Function	cFtp provides access to remote file systems over the FTP, FTPS and SFTP protocols.	
Purpose	cFtp allows data exchange over remote file systems.	
Basic settings	<i>Parameters/type</i>	Select the file transfer protocol, ftp or sftp , ftps .
	<i>Parameters/server</i>	Type in the remote server address to be accessed.
	<i>Parameters/port</i>	Type in the port number to be accessed.
	<i>Parameters/username</i>	Type in the user authentication information.
	<i>Parameters/password</i>	Type in the user authentication information.
	<i>Parameters/directory</i>	Enter the directory you want to access on the remote server. If not specified, the root directory will be accessed.
Advanced settings	<i>Advanced</i>	Set the optional arguments in the corresponding table. Click [+] as many times as required to add arguments to the table. Then click the corresponding Value field and enter a value. See the site http://camel.apache.org/ftp.html for available URI options.
Usage	cFtp can be a start, middle or end component in a Route.	
Limitation	n/a	

Related scenario:

No scenario is available for this component yet.

cHttp



cHttp properties

Component Family	Messaging	
Function	cHttp provides Http-based endpoints for consuming external Http resources, i.e. as a client to call external servers using Http.	
Purpose	cHttp is designed to build a client endpoint to call external Http resources using Http.	
Basic settings	<i>Uri</i>	The URI of the Http resource to call.
	<i>Method</i>	List of the Http request methods.
	<i>Get</i>	Retrieve the information identified by the request URI: Parameters: click the [+] button to add lines as needed and define the key and value in the table. Encoder Charset: enter the encoder charset in the field.
	<i>Post</i>	Request that the origin server accept the entity enclosed in the request as a new subordinate of the resource identified by the request URI: Plain Text: select the Content-Type from <i>text/plain</i> , <i>text/html</i> , <i>text/xml</i> , <i>application/x-www-form-urlencoded</i> , <i>application/xml</i> , <i>application/json</i> , or <i>other...</i> (specify the Content-Type in the next field that appears when <i>other...</i> is selected), and type in the text in the Content box as the request message. Form Style: click the [+] button to add lines as needed and define the key and value in the Parameters table. Also, enter the encoder charset in the Encoder Charset field. Use Message Body: use the incoming message body as the Http request. Select the Content-Type from <i>text/plain</i> , <i>text/html</i> , <i>text/xml</i> , <i>application/x-www-form-urlencoded</i> , <i>application/xml</i> , <i>application/json</i> , or <i>other...</i> (specify the Content-Type in the next field that appears when <i>other...</i> is selected),
	<i>Put</i>	Request that the enclosed entity be stored under the supplied request URI. Plain Text: select the Content-Type from <i>text/plain</i> , <i>text/html</i> , <i>text/xml</i> , <i>application/x-www-form-urlencoded</i> , <i>application/xml</i> , <i>application/json</i> , or <i>other...</i> (specify the Content-Type in the next field that appears when <i>other...</i> is selected), and type in the text in the Content box as the request message. Form Style: click the [+] button to add lines as needed and define the key and value in the Parameters table. Also, enter the encoder charset in the Encoder Charset field. Use Message Body: use the incoming message body as the Http request. Select the Content-Type from <i>text/plain</i> , <i>text/html</i> , <i>text/xml</i> , <i>application/x-www-form-urlencoded</i> , <i>application/xml</i> , <i>application/json</i> , or <i>other...</i> (specify the Content-Type in the next field that appears when <i>other...</i> is selected),
	<i>Delete</i>	Request that the origin server delete the resource identified by the request URI.

		<p>Parameters: click the [+] button to add lines as needed and define the key and value in the table.</p> <p>Encoder Charset: enter the encoder charset in the field.</p>
	<i>Head</i>	<p>Identical to GET except that the server MUST NOT return a message body in the response:</p> <p>Parameters: click the [+] button to add lines as needed and define the key and value in the table.</p> <p>Encoder Charset: enter the encoder charset in the field.</p>
	<i>Options</i>	Represent a request for information about the communication options available on the request/response chain identified by the request URI.
	<i>Trace</i>	Invoke a remote, application-layer loop-back of the request message.
Advanced settings	<i>Headers</i>	Click the [+] button to add lines as needed and define the key and value for headers.
Usage	cHttp provides Http based endpoints for consuming external Http resources, i.e. as a client to call external servers using Http.	
Limitation		

Scenario: Retrieving the content of a remote file

In this scenario, **cHttp** is used to request the body of a weather condition definition file that is available at <http://wsf.cdyne.com/WeatherWS/Weather.asmx>.


Dropping and linking the components

- Drop the following components from the **Palette** onto the workspace: **cMessagingEndpoint**, **cSetBody**, **cHttp** and **cProcessor**, labelled as **STARTER**, **HTTP_REQUEST_BODY**, **GET_WEATHER_DESCRIPTION** and **PRINT_RESPONSE** respectively.
- Link the components using a **Row > Route** connection.




Configuring the components

- Double-click **cMessagingEndpoint** to open its **Basic settings** view in the **Component** tab.

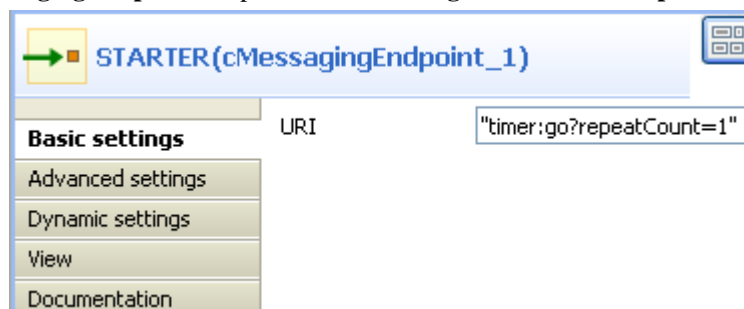


- In the **URI** field, enter `timer:go?repeatCount=1` to define a timer for starting message exchanges. In this example, only one message exchange will be carried out due to the setting of `repeatCount=1`.
- Double-click **cSetBody** to open its **Basic settings** view in the **Component** tab.

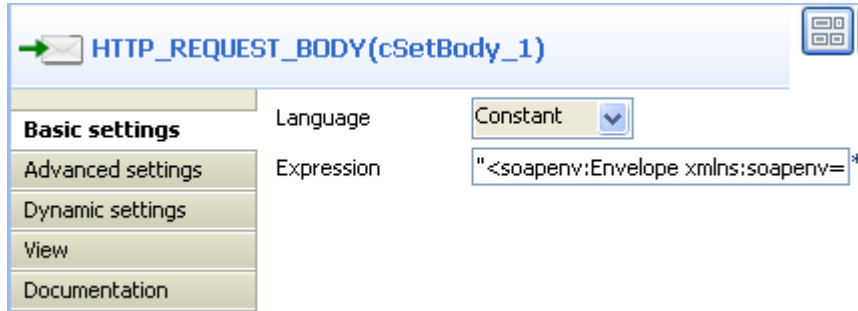


- In the **Language** field, select *Constant*.
- In the **Expression** field, enter the following as the body of the request message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:weat="http://ws.cdyne.com
/WeatherWS/"><soapenv:Header/><soapenv:Body><weat:GetWeatherDefinitionInformation/
></soapenv:Body></soapenv:Envelope>
```

- Double-click **cHttp** to open its **Basic settings** view in the **Component** tab.

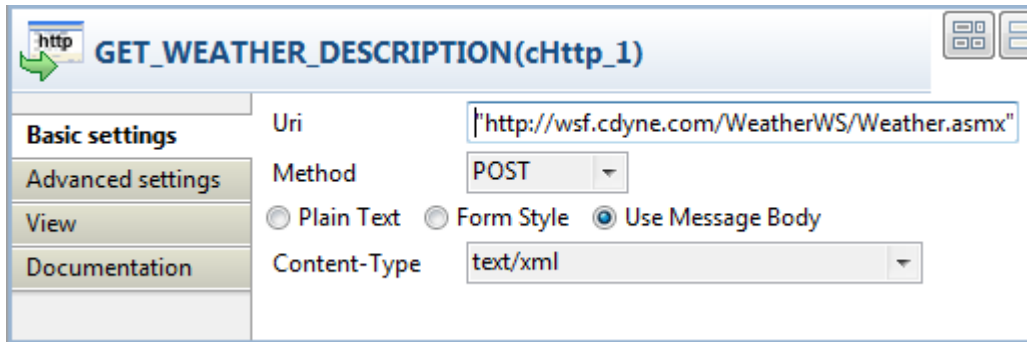


- In the **Uri** field, enter the location of the file to fetch, `http://wsf.cdyne.com/WeatherWS/Weather.asmx` in this example.
- Select *POST* in the **Method** list and then the **Use Message Body** radio button. Select *text/xml* in the **Content-Type** list.
- Click **Advanced settings** for further setup.

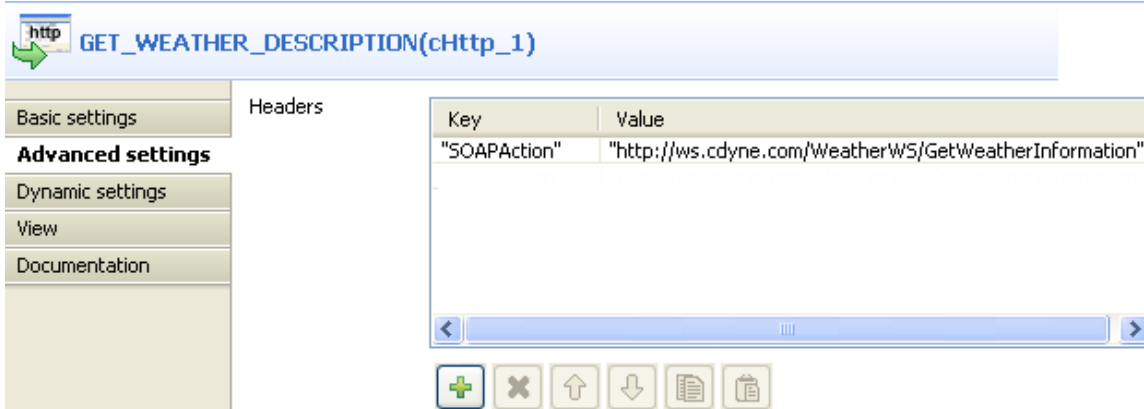

- Click the **[+]** button to add a line in the **Headers** table.

Type in SOAPAction and `http://ws.cdyne.com/WeatherWS/GetWeatherInformation` for the **Key** and **Value** fields.

11. Double-click **cProcessor** to open its **Basic settings** view in the **Component** tab.

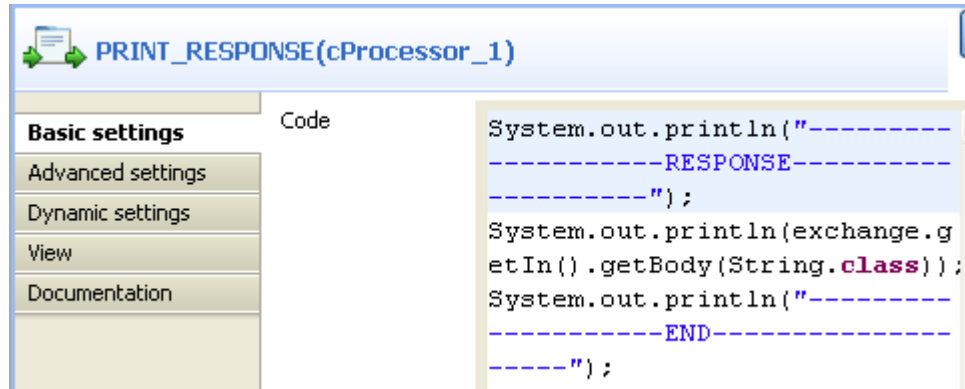

12. In the **Code** area, enter the following to print the response from the remote website, i.e. the body of the desired file:

```
System.out.println("-----RESPONSE-----");
System.out.println(exchange.getIn().getBody(String.class));
System.out.println("-----END-----");
```

13. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to check the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("STARTER"))
                .routeId("STARTER")
                .setBody()
                .constant(
                    "<soapenv:Envelope xmlns:soapenv=\"http://schemas.xmlsoap.org/soap/envel
                .id("cSetBody_1")
                .setHeader("CamelHttpMethod", constant("POST"))
                .setHeader("Content-Type",
                    constant("text/xml;charset=UTF-8"))
                .setHeader(
                    "SOAPAction",
                    constant("http://ws.cdyne.com/WeatherWS/GetWeatherInformation"))
                .to(uriMap.get("GET_WEATHER_DESCRIPTION"))

                .id("cHttp_1").process(
                    new org.apache.camel.Processor() {
                        public void process(
                            org.apache.camel.Exchange exchange)
                            throws Exception {
                            System.out
                                .println("-----RESPONSE-----");
                            System.out.println(exchange
                                .getIn().getBody(
                                    String.class));
                            System.out
                                .println("-----END-----");
                        }
                    }
                ).id("cProcessor_1");
        }
    };
}
```

As shown above, the message exchange starts from the endpoint STARTER, gets its body set to `<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:weat="http://ws.cdyne.com/WeatherWS/"><soapenv:Header/><soapenv:Body><weat:GetWeatherDefinitionInformation/></soapenv:Body></soapenv:Envelope>` at `cSetBody_1`, and then is sent out to the specified website by `cHttp_1`. Finally, the response is printed out via `cProcessor_1`.

2. Press **F6** to execute the Route.

```
[statistics] connecting to socket on port 3992
[statistics] connected
-----RESPONSE-----
<?xml version="1.0" encoding="utf-8"?><soap:Envelope
xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"><soap:Body><GetWeat
herInformationResponse
xmlns="http://ws.cdyne.com/WeatherWS/"><GetWeatherInformationRes
ult><WeatherDescription><WeatherID>1</WeatherID><Description>Thu
nder
Storms</Description><PictureURL>http://ws.cdyne.com/WeatherWS/Im
ages/thunderstorms.gif</PictureURL></WeatherDescription><Weather
Description><WeatherID>2</WeatherID><Description>Partly
ription><WeatherID>37</WeatherID><Description>AM
CLOUDS</Description><PictureURL>http://ws.cdyne.com/WeatherWS/Im
ages/partlycloudy.gif</PictureURL></WeatherDescription></GetWeat
herInformationResult></GetWeatherInformationResponse></soap:Body
></soap:Envelope>
-----END-----
```

As shown above, the retrieved file defines up to 37 weather conditions with detailed description.

cJMS




cJMS properties

Component Family	Messaging	
Function	cJMS allows messages to be sent to, or consumed from, a JMS Queue or Topic.	
Purpose	cJMS is used to send messages to, or consume messages from, a JMS Queue or Topic.	
	<i>URI/Type</i>	Select the messaging type, either queue or topic .
	<i>URI/Destination</i>	Type in a name for the JMS queue or topic.
	<i>ConnectionFactory</i>	Click the three-dot button and select a JMS connection factory to be used for handling messages or enter the name of the corresponding cJMSThroughputFactory component directly in the field.
Advanced settings	<i>URI Options</i>	Set the optional arguments in the corresponding table. Click [+] as many times as required to add arguments to the table. Then click the corresponding value field and enter a value. See the site http://camel.apache.org/jms.html for available URI options.
Usage	cJMS can be a start, middle or end component in a Route.	
Limitation	n/a	

Scenario 1: Sending and receiving a message from a JMS queue

In this scenario, a **cJMS** component sends messages from the local file system to a message queue in one sub-route, and the messages are then consumed by another **cJMS** component in the other sub-route.

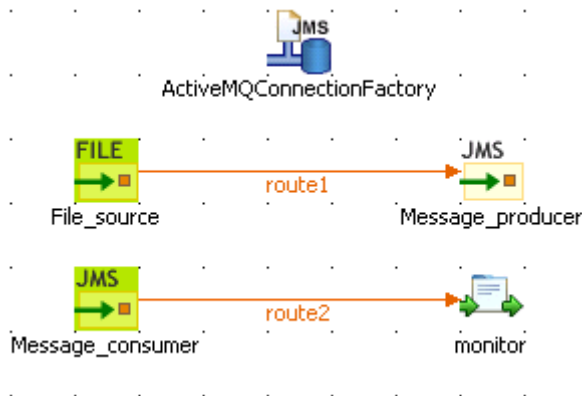


Dropping and linking the components

1. From the **Palette**, expand the **Context** folder, and drop a **cJMSThroughputFactory** component onto the design workspace to specify the JMS connection factory for handling messages.

2. From the **Messaging** folder, drop one **cFile** and two **cJMS** components onto the design workspace.
3. From the **Processor** folder, drop a **cProcessor** component onto the design workspace.
4. Connect the **cFile** component to a **cJMS** component using a **Row > Route** connection as the message producer sub-route.
5. Connect the other **cJMS** component to the **cProcessor** component using a **Row > Route** connection as the message consumer sub-route.
6. Label the components properly for better identification of their functionalities.

Configuring the components


1. Double-click the **cJMSTransactionFactory** component to display its **Basic settings** view in the **Component** tab.

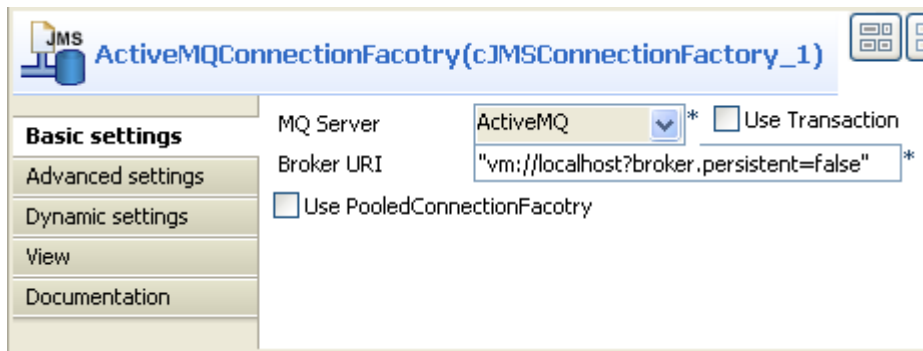

2. From the **MQ Server** list, select an MQ server. In this use case, we use the default ActiveMQ server to handle the messages.

In the **Broker URI** field, type in the URI of the message broker. Here we simply use the default URI "vm://localhost?broker.persistent=false".


3. In the message producer sub-route, double-click the **cFile** component to display its **Basic settings** view.

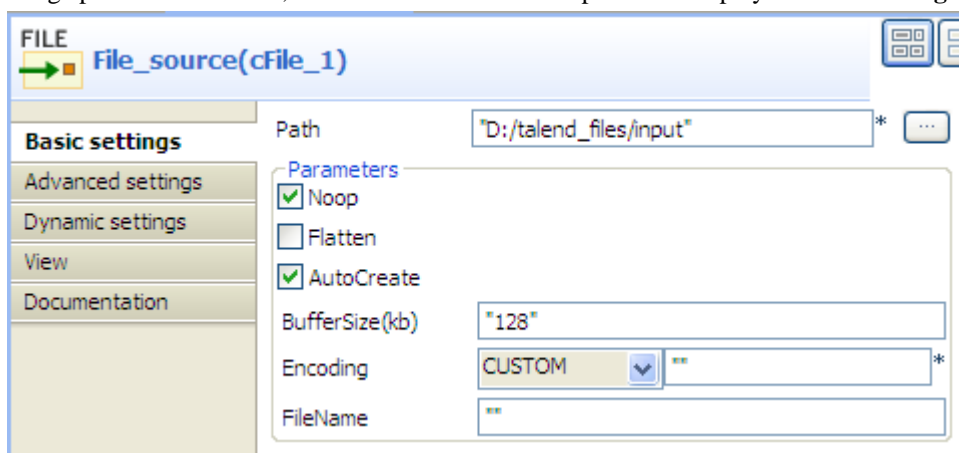

4. Define the properties of the **cFile** component.

In this use case, simply specify the path to the folder that holds the source file to be sent as electronic message, and leave the other parameters as they are.


5. Double-click the **cJMS** component labeled *Message_producer* to display its **Basic settings** view.

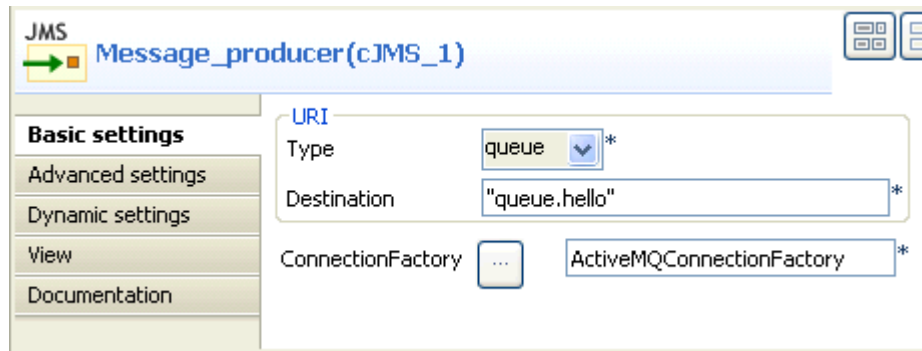


- From the **Type** list, select **queue** to send the messages to a JMS queue.

In the **Destination** field, type in a name for the JMS queue, "queue.hello" in this use case.


Double-click the [...] button next to **ConnectionFactory**. Select the JMS connection factory that you have just configured in the dialog box and click **OK**. You can also enter the name of the **cJMSTypeConnectionFactory** component directly in the field.

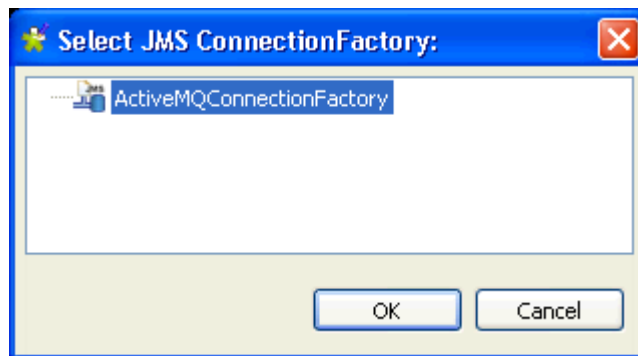

- Switch to the message consumer sub-route, and double click the **cJMS** component labeled *Message_consumer* to display its **Basic settings** view.

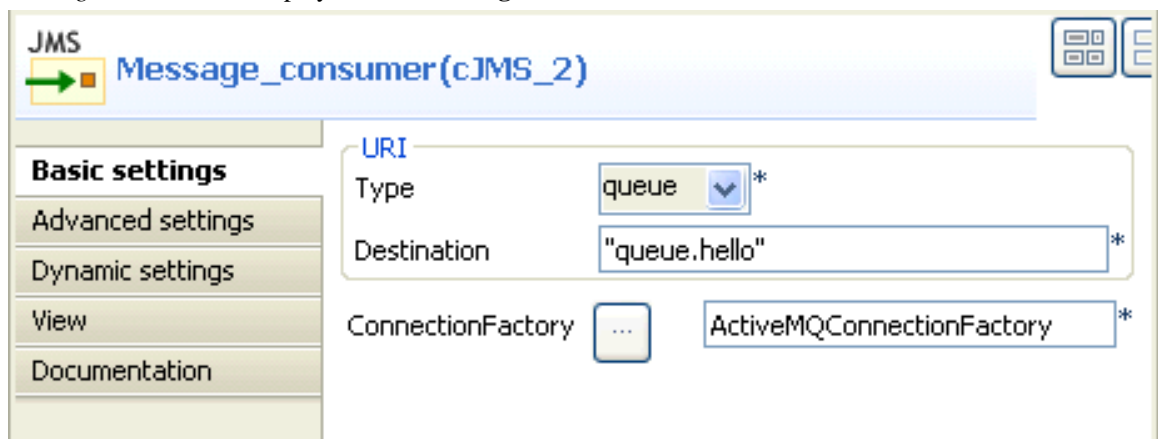

- Configure the message consumer using exactly the same parameters as in the message producer.
- Double-click the **cProcessor** component to display its **Basic settings** view.

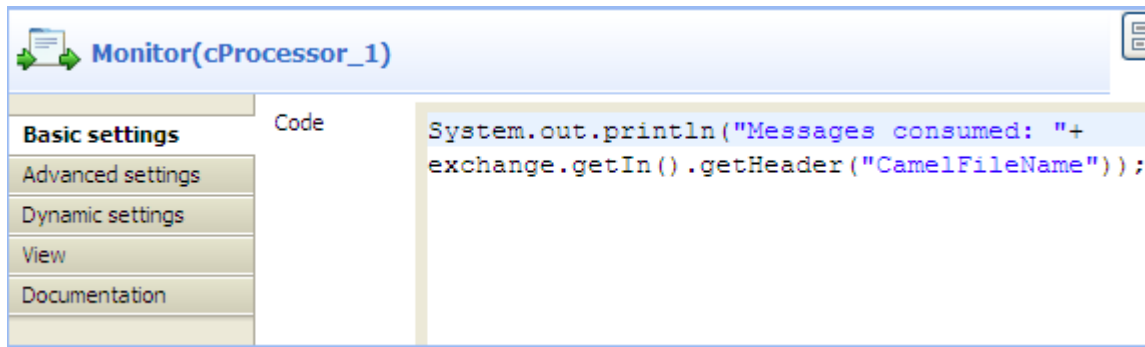

- In the **Code** area, customize the code as shown below to display the file names of the consumed messages on the **Run** console.

```
System.out.println("Message consumed: "+
exchange.getIn().getHeader("CamelFileName"));
```

- Press **Ctrl+S** to save your Routes.

Viewing code and executing the Route

- Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("File_source")).routeId("File_source")
                .to(uriMap.get("Message_producer"))
                .id("cJMS_1");
            from(uriMap.get("Message_consumer")).routeId(
                "Message_consumer").process(
                new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                            System.out.println("Message consumed: "
                                + exchange.getIn().getHeader(
                                    "CamelFileName"));
                        }
                }
            );
        }
    }.id("cProcessor_1");
};


getCamelContexts().get(0).addRoutes(routeBuilder);

typeConverterRegistry = camelContext.getTypeConverterRegistry();
javax.jms.ConnectionFactory jmsConnectionFactory = null;
jmsConnectionFactory = new org.apache.activemq.ActiveMQConnectionFactory(
    "vm://localhost?broker.persistent=false");
camelContext.addComponent("cJMSConnectionFactory1",
    org.apache.camel.component.jms.JmsComponent
        .jmsComponent(jmsConnectionFactory));
```

In the partially shown code, a message route is built from the `File_source` to the `Message_producer` which then sends the message to a message queue via a broker identified by `vm://localhost?broker.persistent=false`. The message from the `Message_consumer` is processed by `cProcessor_1`.

- Click the **Run** button in the **Run** view to launch the execution of your Route. You can also press **F6** to execute it.

RESULT: The message is received by the consumer, as shown on the **Run** console.

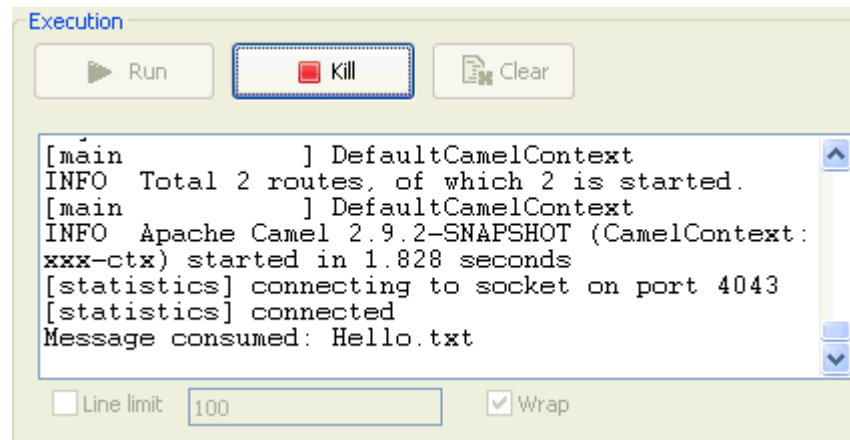

```


Execution
[main] DefaultCamelContext
INFO Total 2 routes, of which 2 is started.
[main] DefaultCamelContext
INFO Apache Camel 2.9.2-SNAPSHOT (CamelContext:
xxx-ctx) started in 1.828 seconds
[statistics] connecting to socket on port 4043
[statistics] connected
Message consumed: Hello.txt
  
```

Scenario 2: Setting up a JMS local transaction

In this scenario, a local transaction with three steps is performed to send, test and consume a JMS message:

- The first Route is used to send a "hello world!" message to feed the *queue.hello* JMS queue.
- The second Route is used to test the received JMS message. This message is redelivered six times to the *queue.hello* queue and is then moved to the *Dead Letter* JMS queue. The Route is programmed to throw an exception every time an exchange is processed by the Route.
- The last Route is used to consume the "hello world!" message from the *Dead Letter* JMS queue.

Sending a message to the *queue.hello* JMS queue

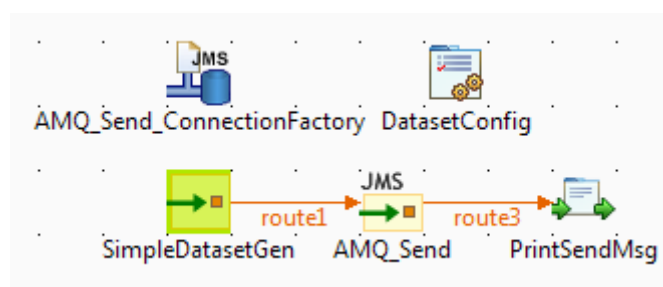


Dropping and linking the components

- From the **Palette**, drop the five following components onto the design workspace: one **cJMSSessionFactory**, one **cConfig**, one **cMessagingEndpoint**, one **cJMS** and one **cProcessor** component.
- Connect the **cMessagingEndpoint** component to the **cJMS** using a **Row > Route** connection.
- Connect the **cJMS** component to the **cProcessor** component using a **Row > Route** connection.

Configuring the components

1. Double-click the **cJMSSConnectionFactory** component labelled *AMQ_Send_ConnectionFactory* to display its **Basic settings** view in the **Component** tab.

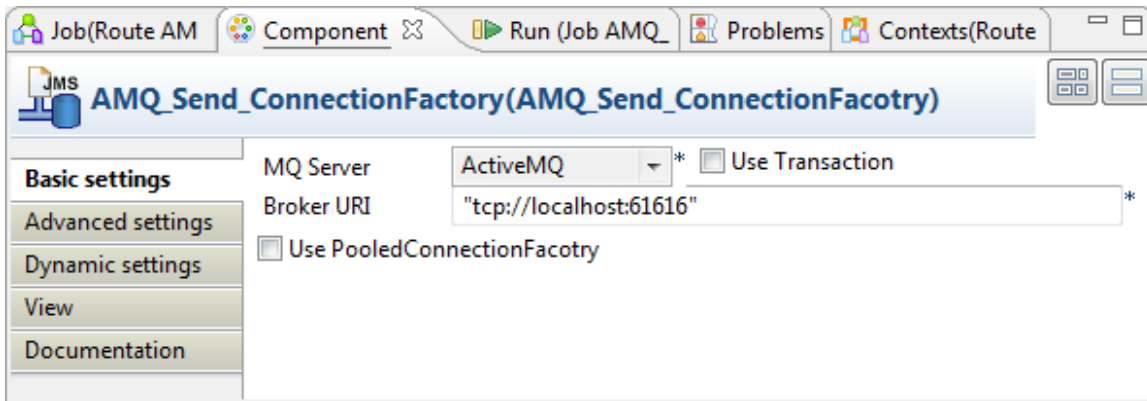


2. From the **MQ Server** list, select an MQ server. In this use case, we use the default ActiveMQ server to handle the messages.
3. In the **Broker URI** field, type in Active MQ's default URI of the localhost server: *"tcp://localhost:61616"*.



When using ActiveMQ to handle messages between different Routes, you need to launch the ActiveMQ server before executing the Routes. For more information on installing and launching ActiveMQ server, see the Apache Web site <http://activemq.apache.org/index.html>.

4. Double-click the **cConfig** component, which is labelled *DatasetConfig*, to display its **Basic settings** view in the **Component** tab and set its parameters.

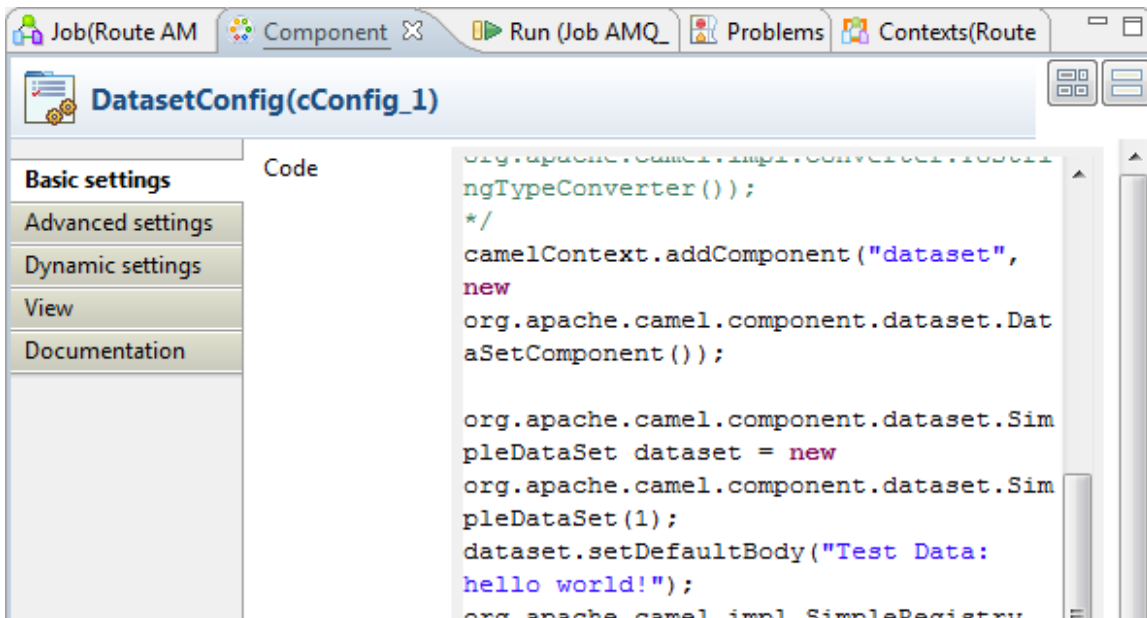


5. Write a piece of code in the **Code** field to register the dataset instance *hello* into the registry, as shown below.


```

org.apache.camel.component.dataset.SimpleDataSet dataset = new
org.apache.camel.component.dataset.SimpleDataSet(1);
dataset.setDefaultBody("Test Data: hello world!");
org.apache.camel.impl.SimpleRegistry registry = new
org.apache.camel.impl.SimpleRegistry();
    registry.put("hello", dataset);
camelContext.setRegistry(registry);
    
```


- Double-click the **cMessagingEndpoint** component, which is labelled *SimpleDatasetGen*, to display its **Basic settings** view in the **Component** tab, and set its parameters.

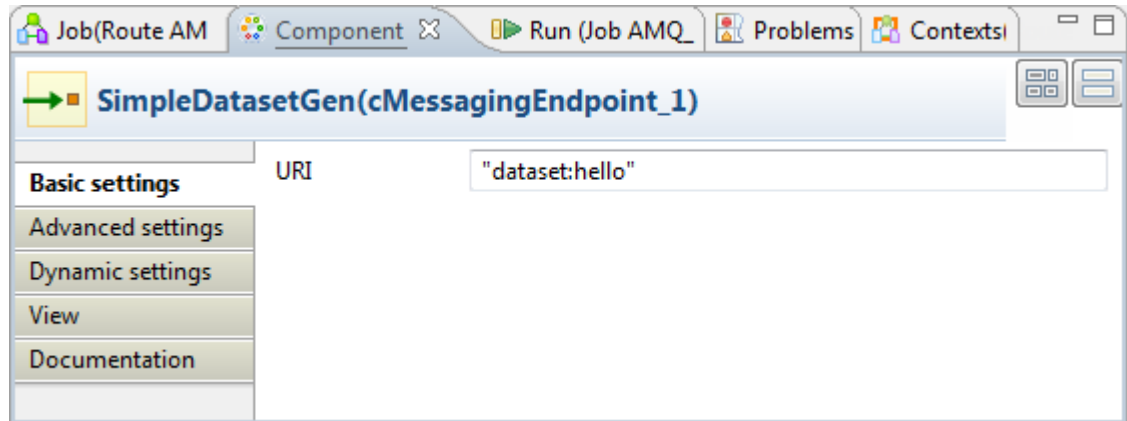


- In the **URI** field, enter *dataset:hello* between the quotation marks.
- Double-click the **cJMS** component labeled *AMQ_Send* to display its **Basic settings** view.

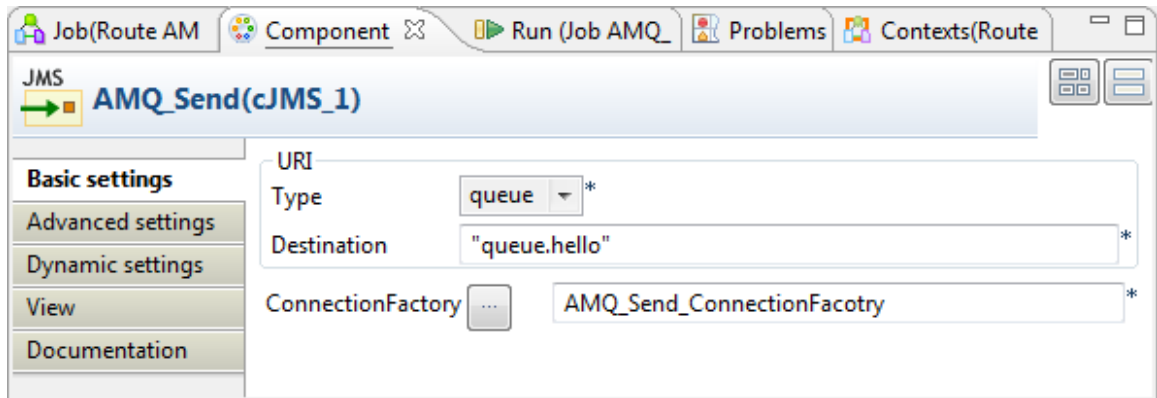

- From the **Type** list, select **queue** to send the message to a JMS queue.

In the **Destination** field, type in a name for the JMS queue, *"queue.hello"* in this use case.

Double-click the [...] button next to **ConnectionFactory**. Select the JMS connection factory that you have just configured in the dialog box and click **OK**. You can also enter the name of the **cJMSTConnectionFacotry** component directly in the field.

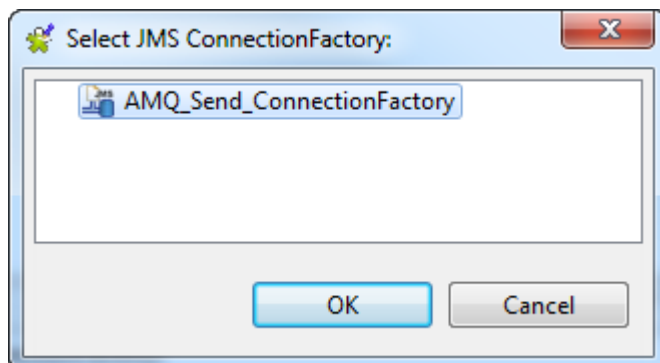

- Double-click the **cProcessor** component labelled *PrintSendMsg* to display its **Basic settings** view in the **Component** tab, and customize the code in the **Code** area to display the sent message intercepted on the console.


```
System.out.println("AMQ Send: "+
```

```
exchange.getIn().getBody(String.class));
```


Executing the Route

- Click the **Run** button in the **Run** view to launch the execution of your Route. You can also press **F6** to execute it.

RESULT: One "hello world!" message is sent to the JMS Queue, as shown in the **Run** console.

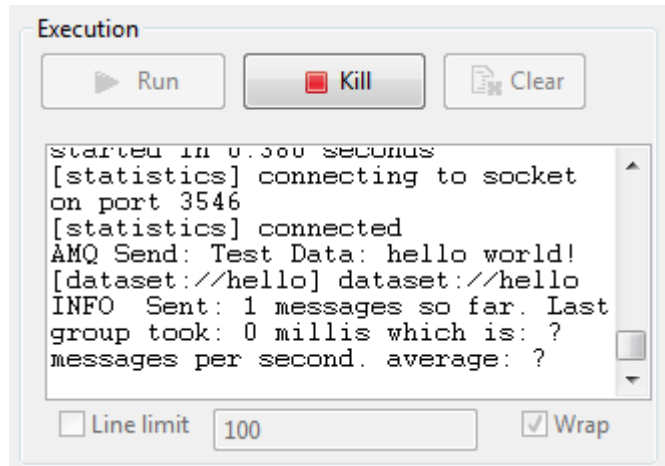

Testing the received message

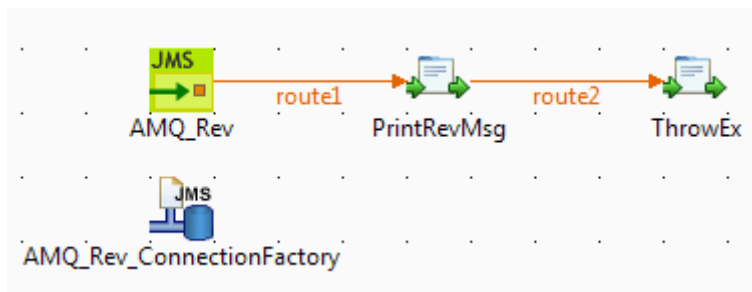


Dropping and linking the components

- From the **Palette**, drop the four following components onto the design workspace: one **cJMS**, two **cProcessor** components and one **cJMSConnectionFactory**.
- Connect the **cJMS** component to the first **cProcessor** using a **Row > Route** connection.
- Connect the first **cProcessor** component to the second **cProcessor** component using a **Row > Route** connection.

Configuring the components


- Double-click the **cJMSConnectionFactory** component labelled *AMQ_Rev_ConnectionFactory* to display its **Basic settings** view in the **Component** tab.

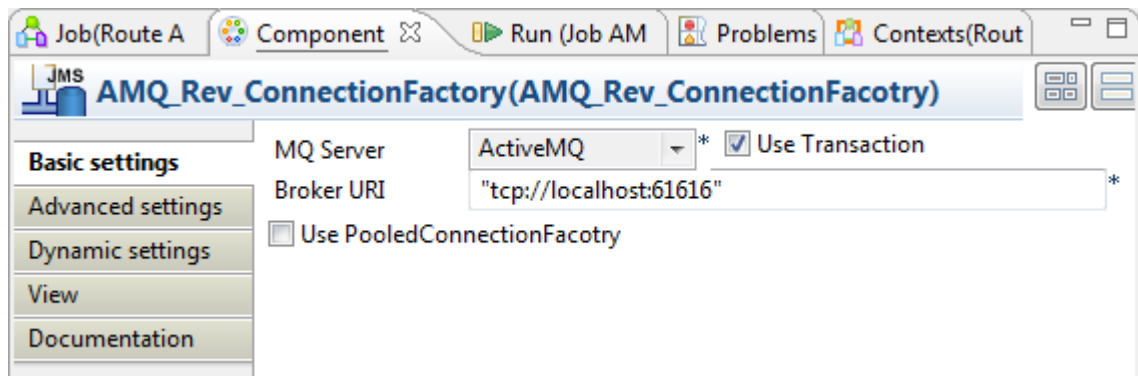

- From the **MQ Server** list, select an MQ server. In this use case, we use the default ActiveMQ server to handle the messages.

Select the **Use transaction** check box.


- In the **Broker URI** field, type in Active MQ's default URI of the localhost server: `"tcp://localhost:61616"`.
- Double-click the **cJMS** component labeled *AMQ_Rev* to display its **Basic settings** view.

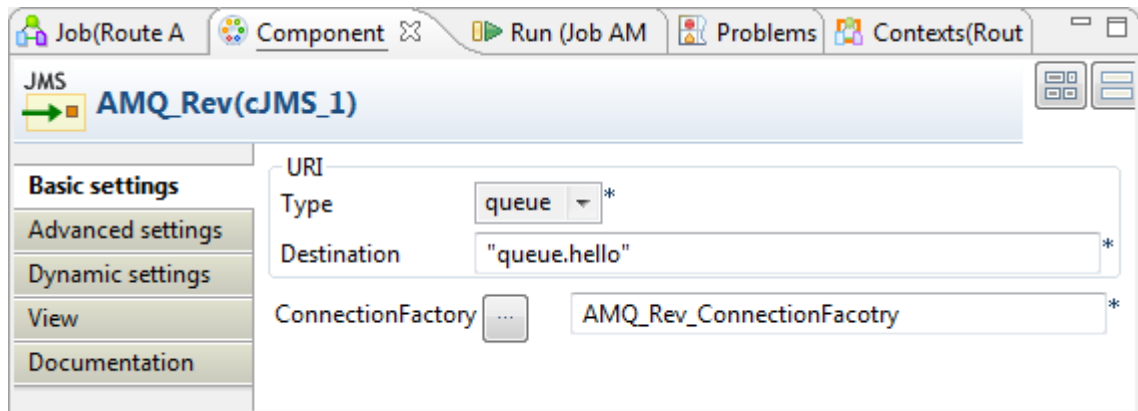

- From the **Type** list, select **queue** to send the messages to a JMS queue.

In the **Destination** field, type in a name for the JMS queue, `"queue.hello"` in this use case.

Double-click the [...] button next to **ConnectionFactory**. Select the JMS connection factory that you have just configured in the dialog box and click **OK**. You can also enter the name of the **cJMSConnectionFactory** component directly in the field.

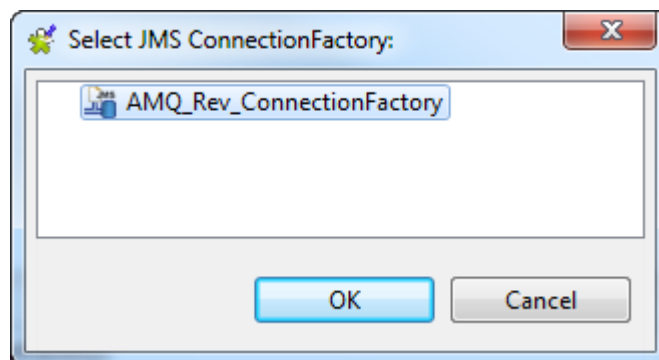

- Double-click the first **cProcessor** component labeled *PrintRevMsg* to display its **Basic settings** view in the **Component** tab, and customize the code in the **Code** area to display the received message intercepted on the console.

```
System.out.println("AMQ Receive: "+
```

```
exchange.getIn().getBody(String.class));
```

7. Double-click the second **cProcessor** component labelled *ThrowEx* to display its **Basic settings** view in the **Component** tab, and customize the code in the **Code** area to throw the *Force fail* exception every time an exchange is processed by the route.


```
throw new Exception("Force fail")
```

Executing the Route

- Click the **Run** button in the **Run** view to launch the execution of your Route. You can also press **F6** to execute it.

RESULT: The "hello world!" message is tested and a rollback transaction is performed. Once the message redelivery attempts exceeds six times, the pending message is sent to the *Dead Letter JMS* Queue.

Consuming the message from the *DeadLetter JMS* queue

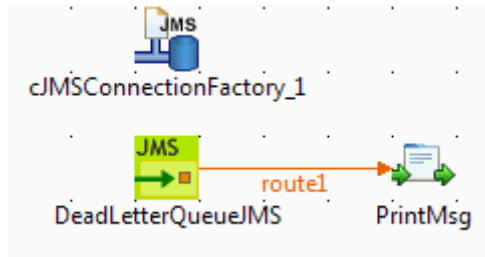


Dropping and linking the components

1. From the **Palette**, drop the three following components onto the design workspace: one **cJMSConnectionFactory**, one **cJMS** and one **cProcessor** component.
2. Connect the **cJMS** component to the **cProcessor** component using a **Row > Route** connection.


Configuring the components

1. Double-click the **cJMSConnectionFactory** component to display its **Basic settings** view in the **Component** tab.

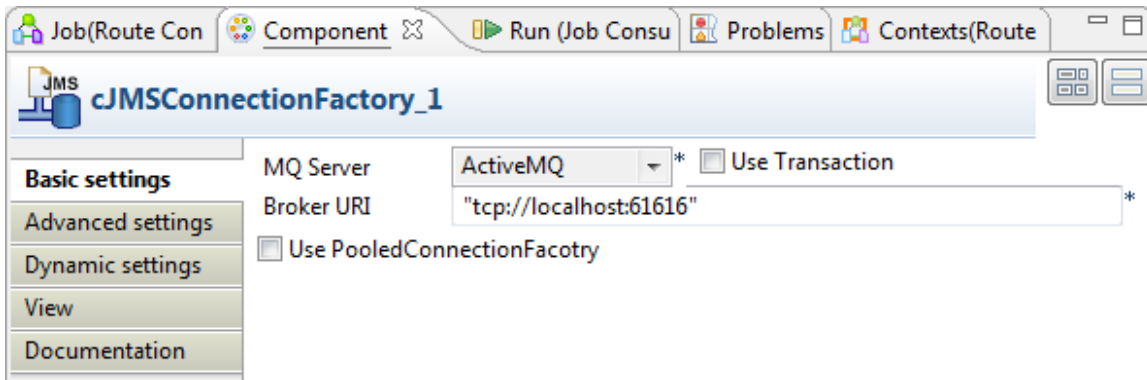

2. From the **MQ Server** list, select an MQ server. In this use case, we use the default ActiveMQ server to handle the messages.
3. In the **Broker URI** field, type in Active MQ's default URI of the localhost server: "tcp://localhost:61616".


4. Double-click the **cJMS** component labeled *DeadLetterQueueJMS* to display its **Basic settings** view.

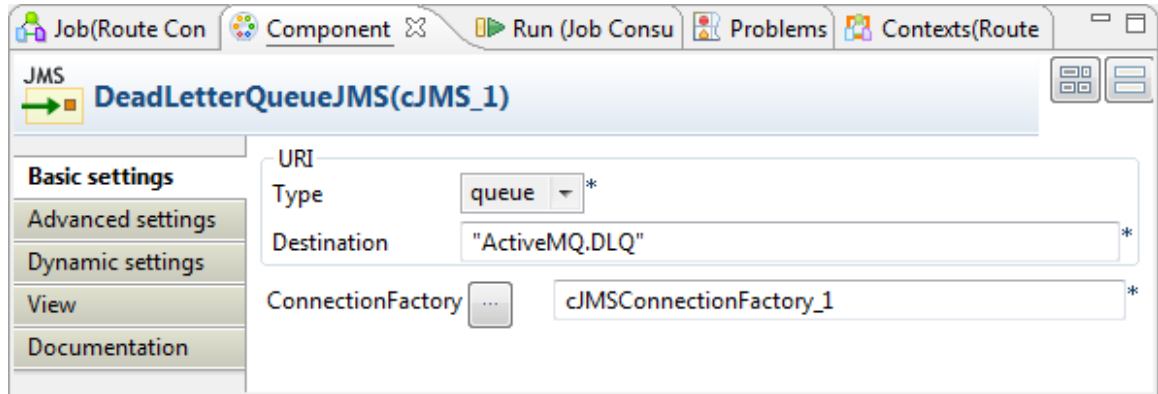

5. From the **Type** list, select **queue** to send the messages to a JMS queue.

In the **Destination** field, type in a name for the JMS queue, *ActiveMQ.DLQ* in this use case (the default *Dead Letter Queue* in ActiveMQ).

Double-click the [...] button next to **ConnectionFactory**. Select the JMS connection factory that you have just configured in the dialog box and click **OK**. You can also enter the name of the **cJMSConnectionFactory** component directly in the field.

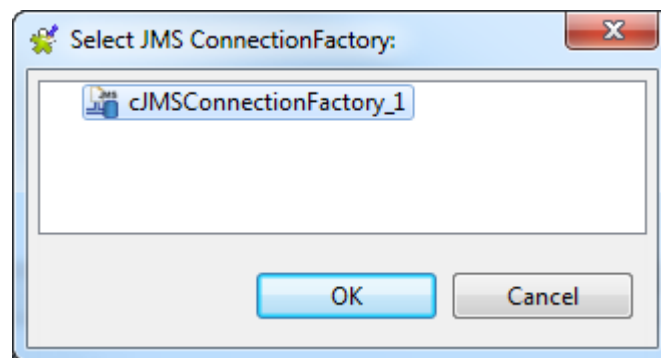


6. Double-click the **cProcessor** component labelled *PrintMsg* to display its **Basic settings** view in the **Component** tab, and customize the code in the **Code** area to display the received message intercepted on the console.

```
System.out.println("AMQ Receive: "+
exchange.getIn().getBody(String.class));
```

Executing the Route

- Click the **Run** button in the **Run** view to launch the execution of your Route. You can also press **F6** to execute it.

RESULT: The *"hello world!"* message that was in the *Dead Letter* queue is consumed, as shown in the **Run** console.

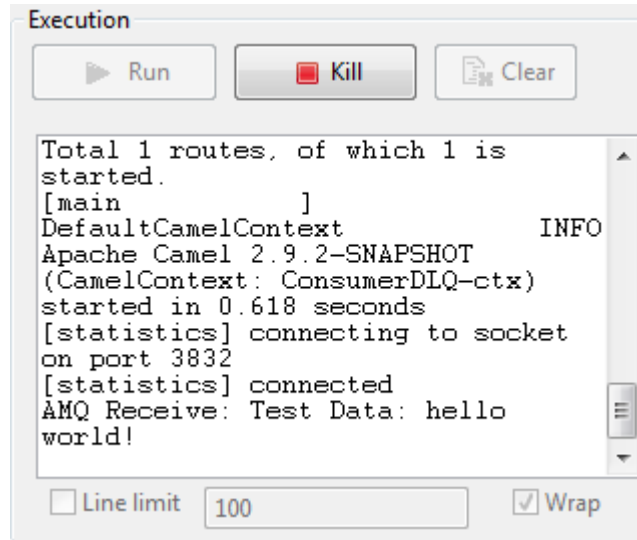

Scenario 3: Sending and receiving a scheduled delivery of messages from a JMS Queue using Camel Quartz


This scenario will show you how to use the Camel Quartz component to provide a scheduled delivery of messages from a JMS Queue.

To do this, we will build two Routes, a message producer Route and a consumer Route. We will implement the Quartz component in the producer Route to send scheduled messages to a JMS Queue. The messages are then consumed by the consumer Route.

In this use case, we will use Apache ActiveMQ as the message broker. We need to launch the ActiveMQ server before executing the Route. For more information about installing and launching ActiveMQ server, see the site <http://activemq.apache.org/index.html>.

Building the producer Route

Dropping and linking the components

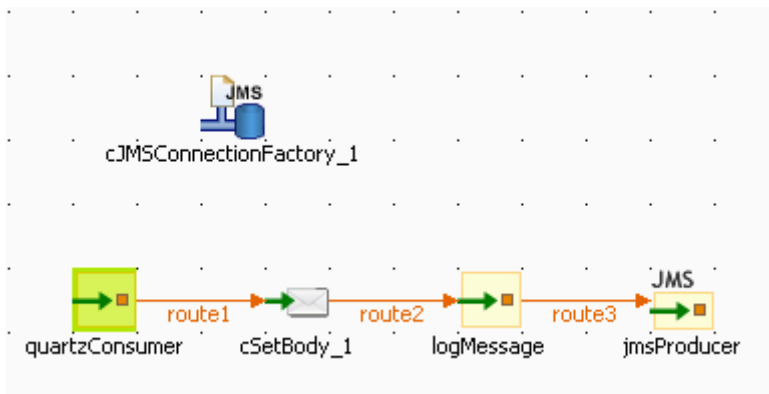


1. From the **Palette**, drag and drop a **cJMSConnectionFactory**, a **cJMS**, a **cSetBody**, and two **cMessagingEndpoint** components onto the design workspace.

- Label the components for better identification of their roles and link them with the **Row > Route** connection as shown above.

Configuring the components

- Double-click the **cJMSSConnectionFactory** component to display its **Basic settings** view in the **Component** tab.

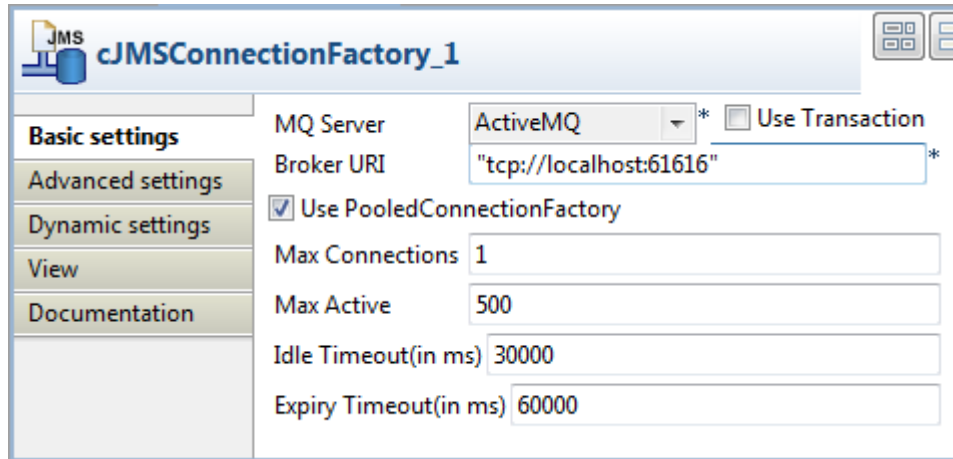


- From the **MQ Server** list, select **ActiveMQ** to handle messages.


In the **Broker URI** field, type in the URI of the local Active MQ server, `tcp://localhost:61616`.


Select the **Use PooledConnectionFactory** check box and keep the default settings.

- Double-click the **quartzConsumer** component to open its **Basic settings** view in the **Component** tab.

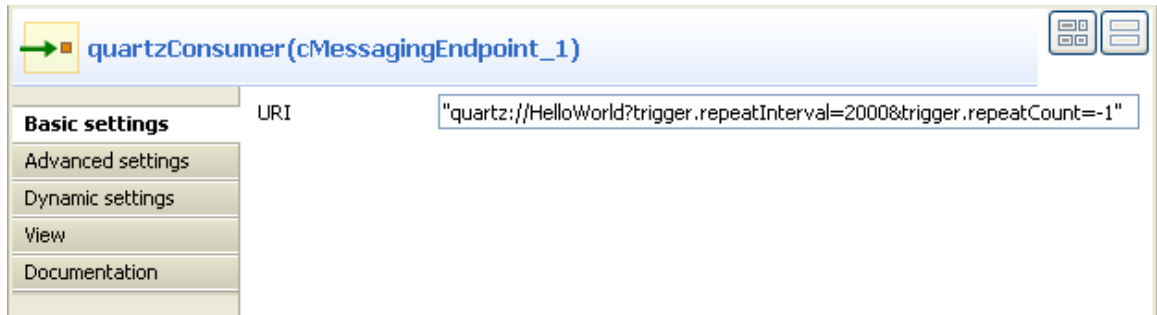


- In the **URI** field, enter the code `quartz://HelloWorld?trigger.repeatInterval=2000&trigger.repeatCount=-1` to define a timer for starting message exchanges. In this use case, we want the message to be delivered endlessly between an interval of two seconds. For more information about Quartz, see the site <http://camel.apache.org/quartz.html>.

- Click the **Advanced settings** view. Click  at the bottom of the **Dependencies** list to add a row and select `quartz` from the drop-down list. For more information about the Quartz component, see the site <http://camel.apache.org/quartz.html>.

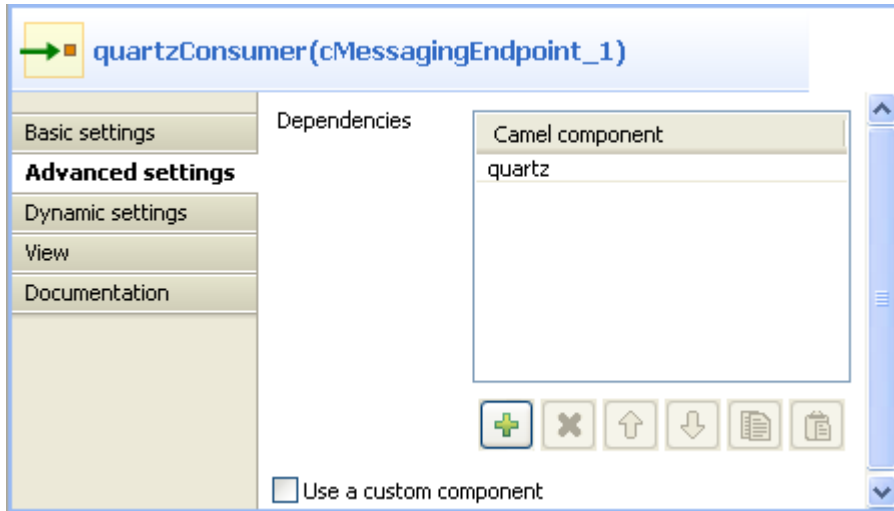


6. Double-click the **cSetBody** component to open its **Basic settings** view in the **Component** tab.

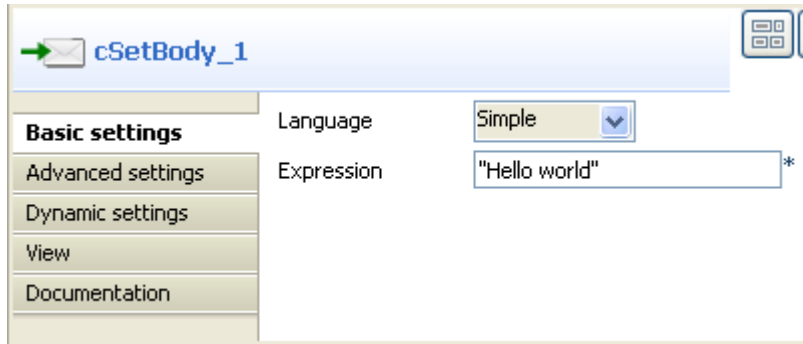


7. Select **Simple** from the **Language** list box and type in "Hello world" in the **Expression** field.

8. Double-click the **logMessage** component to open its **Basic settings** view in the **Component** tab.

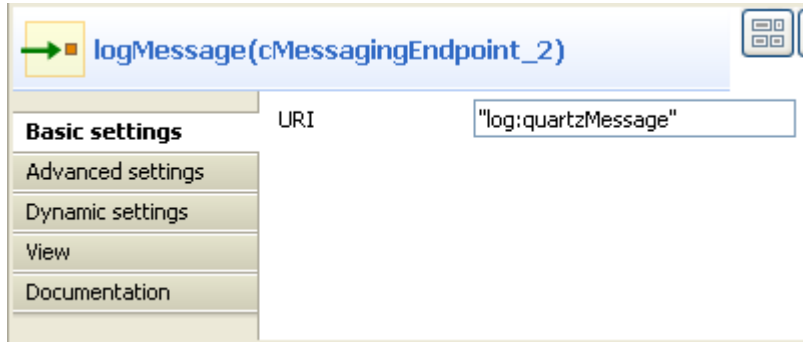

9. In the **URI** field, enter "log:quartzMessage" where the message exchanges are logged.

10. Double-click the **jmsProducer** component to display its **Basic settings** view in the **Component** tab.

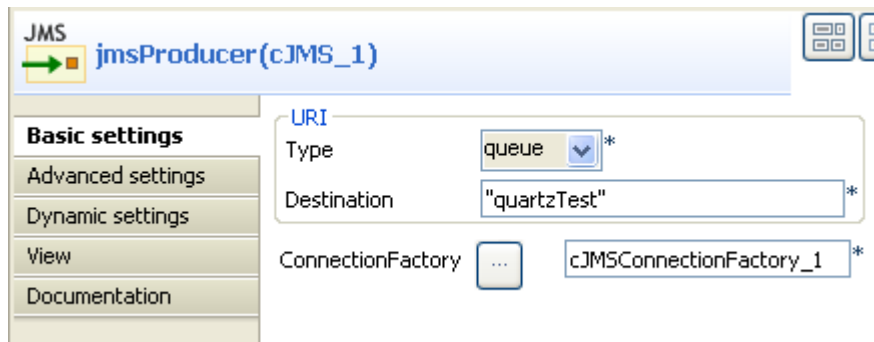

- From the **Type** list, select **queue** to send the messages to a JMS queue.

In the **Destination** field, type in a name for the JMS queue, "quartzTest" in this use case.

In the **ConnectionFactory** field, enter the name of the JMS connection factory that you have just configured.

- Press **Ctrl+S** to save your Route.

Viewing the code and executing the Route


- Click the **Code** tab at the bottom of the design workspace to check the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("quartzConsumer")).routeId(
                "quartzConsumer").setBody().simple(
                "Hello world").id("cSetBody_1").to(
                uriMap.get("logMessage")).id(
                "cMessagingEndpoint_2").to(
                uriMap.get("jmsProducer")).id("cJMS_1");
        }
    };
    getCamelContexts().get(0).addRoutes(routeBuilder);
}
```

As shown above, the message flow from quartzConsumer is given a payload by cSetBody_1 and then sent to logMessage and jmsProducer.


- Press **F6** to execute the Route.

RESULT: The logs of the message exchange are printed in the console.

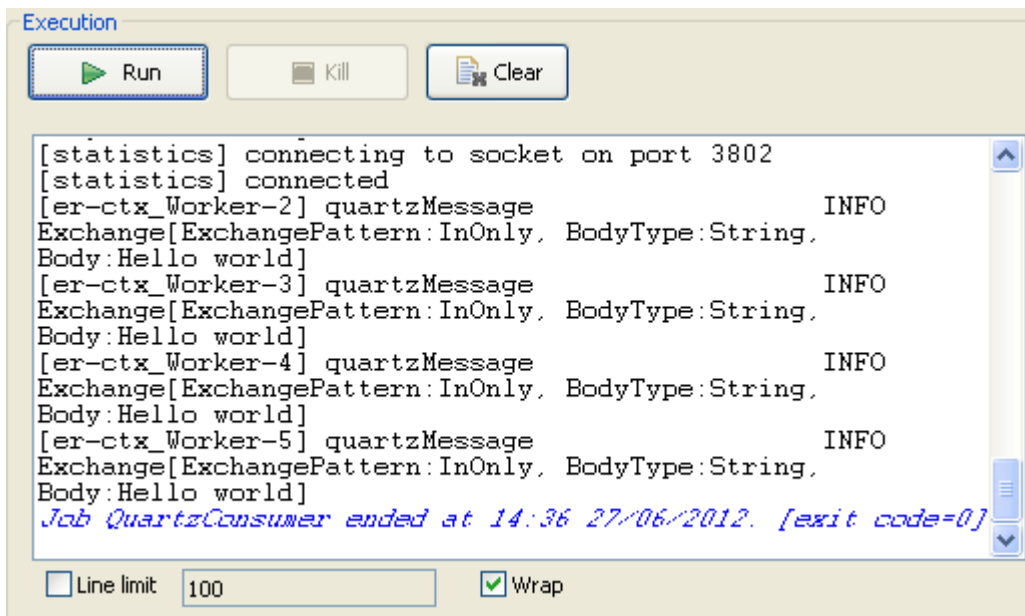

Building the consumer Route


Dropping and linking the components

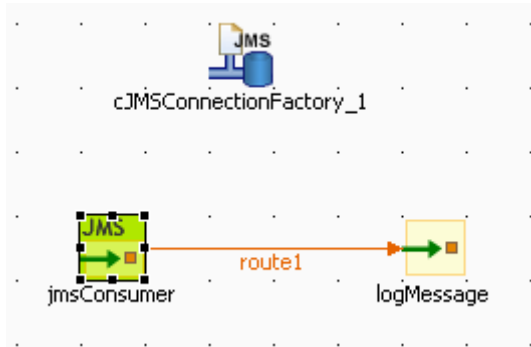


1. From the **Palette**, drag and drop a **cJMSConnectionFactory**, a **cJMS**, and a **cMessagingEndpoint** component onto the design workspace.
2. Label the components for better identification of their roles and link them with the **Row > Route** connection as shown above.

Configuring the components

1. Double-click the **cJMSConnectionFactory** component to display its **Basic settings** view in the **Component** tab.

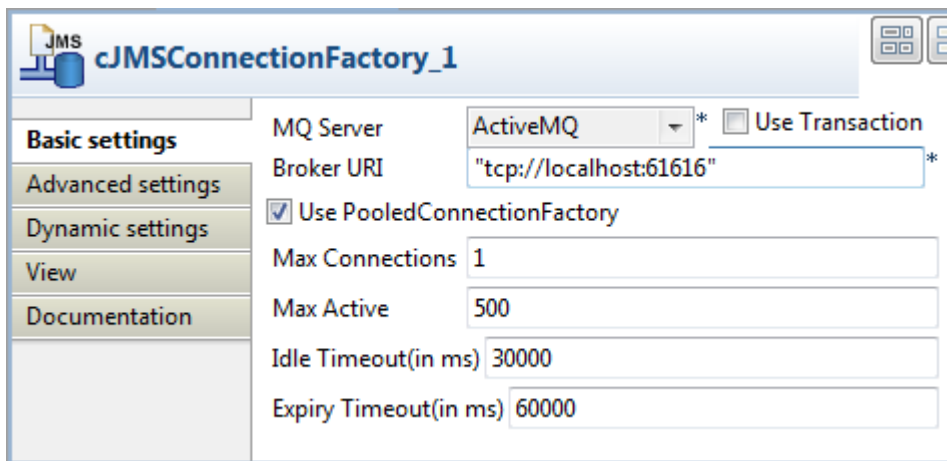


2. Configure the **cJMSConnectionFactory** component the same as in the producer Route.
3. Double-click the **jmsConsumer** component to display its **Basic settings** view in the **Component** tab.

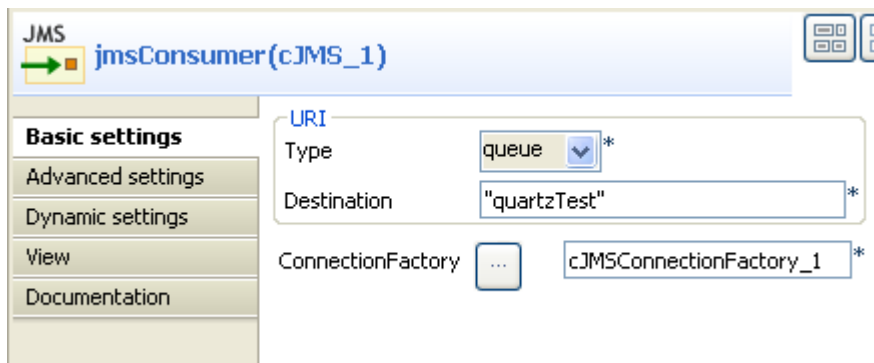

4. Configure the **jmsConsumer** component the same as the **jmsProducer** component in the producer Route to consume the messages in the defined queue "quartzTest".

- Double-click the **logMessage** component to open its **Basic settings** view in the **Component** tab.

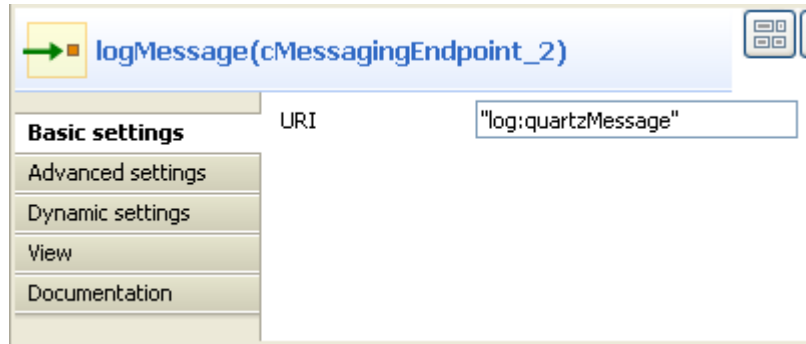

- In the **URI** field, enter "log:quartzMessage" where the message exchanges are logged.
- Press **Ctrl+S** to save your Route.

Viewing the code and executing the Route


- Click the **Code** tab at the bottom of the design workspace to check the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("jmsConsumer")).routeId("jmsConsumer")
                .to(uriMap.get("logMessage")).id(
                    "cMessagingEndpoint_1");
        }
    };
    getCamelContexts().get(0).addRoutes(routeBuilder);
}
```

As shown above, the message flow is routed from `jmsConsumer` to `logMessage`.

- Press **F6** to execute the Route.

RESULT: The logs of the message exchange are printed in the console.

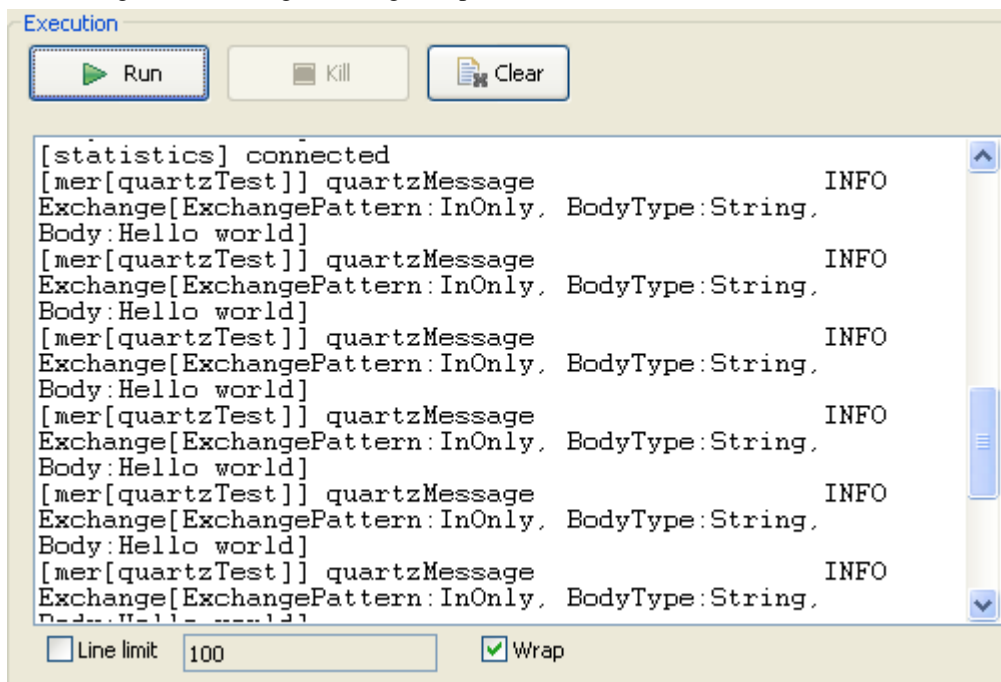

cMail



cMail Properties

Component family	Messaging	
Function	cMail is designed to send or receive mails.	
Purpose	Sends or receives mails in a route.	
Basic settings	<i>Protocols</i>	List of protocols for sending or receiving mails.
	<i>Host</i>	Host name of the mail server.
	<i>Port</i>	Port number of the mail server.
	<i>UserName and Password</i>	Login authentication data.
	<i>Subject</i>	Subject of the mail being sent.
	<i>Content Type</i>	The mail content type.
	<i>From</i>	The mail sender.
	<i>To</i>	The mail receivers.
	<i>CC</i>	The CC recipients of the mail. Separate multiple email addresses with a comma.
	<i>BCC</i>	The BCC recipients of the mail. Separate multiple email addresses with a comma.
Advanced settings	<i>Arguments</i>	Click the [+] button to add lines as needed in the Arguments table. Then, enter the name and value of an argument.
Usage	When used as a start component, cMail is intended to receive mails. Otherwise, it is intended to send mails.	
Limitation	n/a	


Scenario: Using cMail to send and receive mails

This scenario includes two routes. The first one sends a mail while the second receives it.


Now we build a route to send a mail.

Mail sending

- Drop the components from the **Palette** onto the workspace: **cFile**, **cMail** and **cProcessor**, respectively labelled as **Mail_to_send**, **Send_Mail** and **Mail_Sent**.
- Link the components using a **Row > Route** connection.

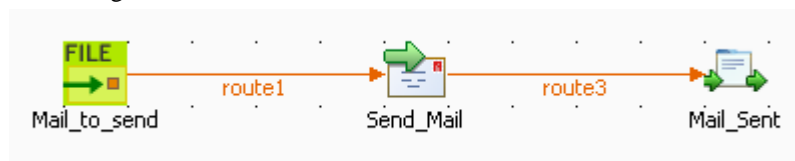


- Double-click **cFile** to open its **Basic settings** view in the **Component** tab.

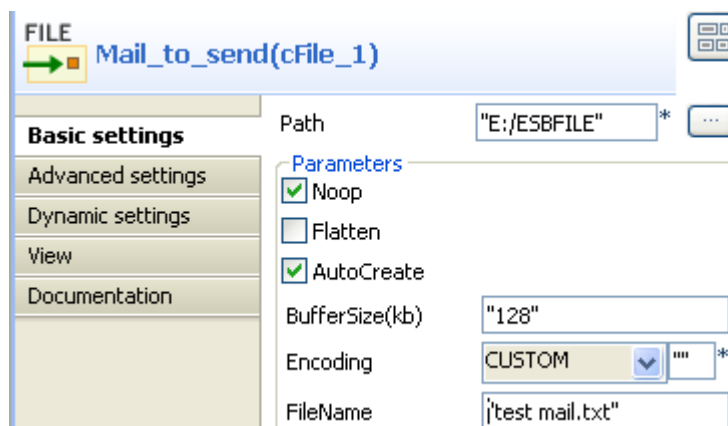

4. Click the [...] button next to the **Path** field to select the folder that has the file to send.
5. In the **FileName** field, enter the name of the file to send, *test mail.txt* in this use case. Keep the default setup of other items.

The content of this file is *test mail body*.

6. Double-click **cMail** to open its **Basic settings** view in the **Component** tab.

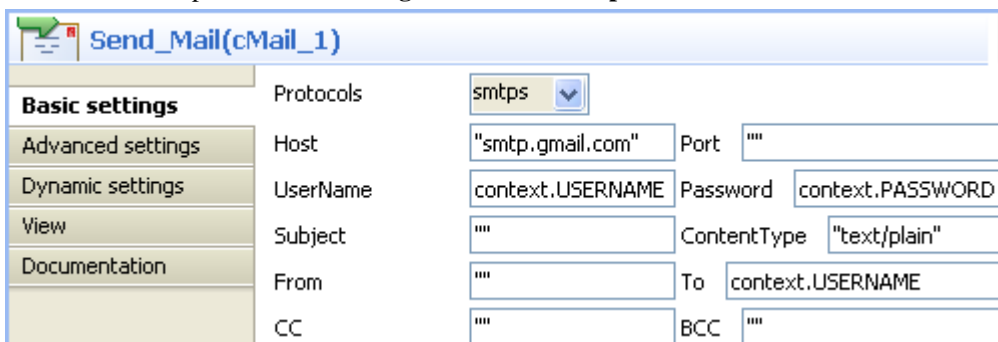

7. In the **Protocols** list, select *smtps*.


In the **Host** field, type in the host name of the smtp server, *smtp.gmail.com* in this use case.

In the **UserName** and **Password** fields, enter the login authentication credentials, which are in the form of context variables in this example. For more information about context variable setup, see *Talend Open Studio for ESB User Guide*.

Keep the default setting of the **ContentType** field, i.e. *text/plain*.

In the **To** field, enter the receiver of the mail, which is also in the form of context variable in this example.

8. Double-click **cProcessor** to open its **Basic settings** view in the **Component** tab.

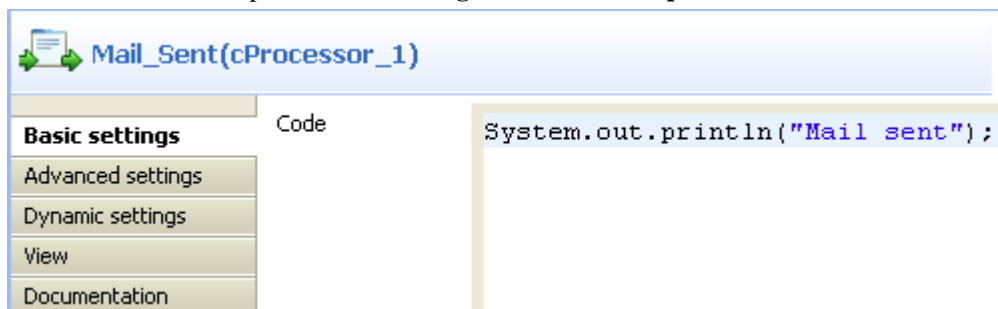

9. In the **Code** box, enter the code below to give a prompt after the mail is sent.

```
System.out.println("Mail sent");
```

10. Save the route and press **F6** to run.

```
[statistics] connecting to socket on port 3612
[statistics] connected
Mail sent
```

As shown above, the mail has been sent out successfully.


Now we build a route to receive the mail.

Mail receiving


- Drop the components from the **Palette** onto the workspace: **cMail** and **cProcessor**, respectively labelled as **Receive_Mail** and **Mail_Body**.
- Link the components using a **Row > Route** connection.



3. Double-click **cMail** to open its **Basic settings** view in the **Component** tab.

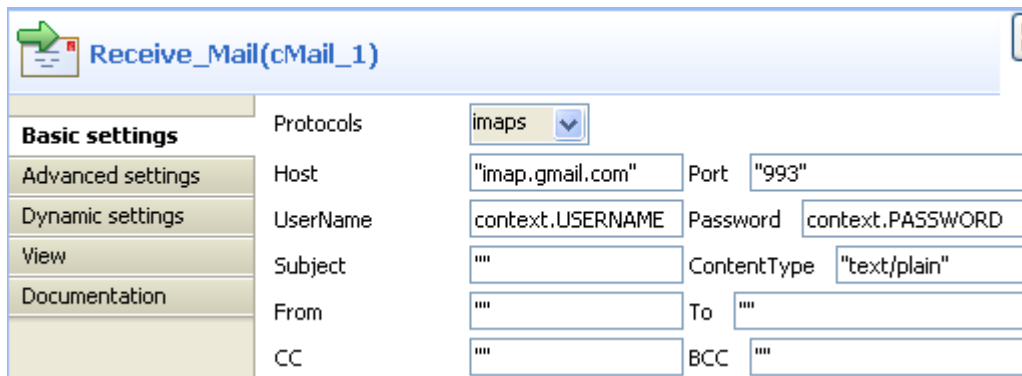

- In the **Protocols** list, select *imaps*.
- In the **Host** field, type in the host name of the imap server, *imap.gmail.com* in this use case.
- In the **Port** field, type in the port number, *993* in this use case.
- In the **UserName** and **Password** fields, enter the login authentication credentials, which are in the form of context variables in this example. For more information about context variable setup, see *Talend Open Studio for ESB User Guide*.
- Keep the default setting of the **ContentType** field, i.e. *text/plain*.
- Double-click **cProcessor** to open its **Basic settings** view in the **Component** tab.

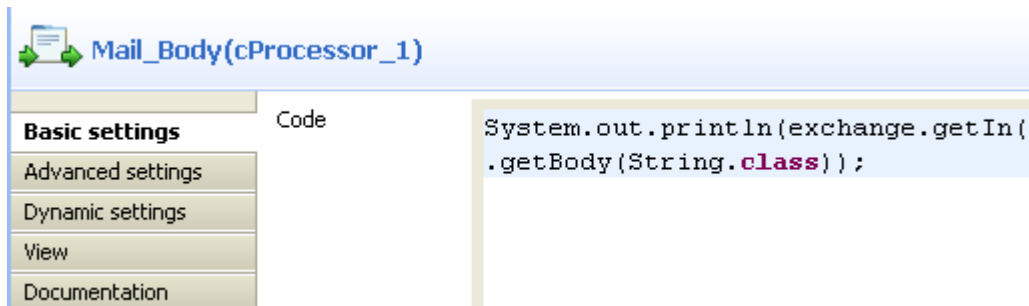

10. In the **Code** box, enter the code below to print the mail body.

```
System.out.println(exchange.getIn().getBody(String.class));
```

11. Save the route and press **F6** to run.


```
[statistics] connecting to socket on port 3915  
[statistics] connected  
test mail body
```

As shown above, the mail has been received and its content is *test mail body*.

cMessagingEndpoint



cMessagingEndpoint properties

Component Family	Messaging	
Function	cMessagingEndpoint allows two applications to communicate by either sending or receiving messages, one endpoint can not do both.	
Purpose	cMessagingEndpoint sends or receives messages.	
Basic settings	<i>URI</i>	<p>URI of the messages to send or receive. It can be of different format:</p> <ul style="list-style-type: none"> -File: "file:/", -Database: "jdbc:/", -Protocols: "ftp:/", "http/" -etc. <p>You can add parameters to the URI using the generic URI syntax, for example:</p> <p>"file:/directoryName?option=value&option=value"</p> <p>For more information on the different components that can be used in cMessagingEndpoint, see Apache Camel's Website: http://camel.apache.org/components.html.</p>
Advanced settings	<i>Dependencies</i>	<p>By default, the camel core supports the following components: bean, browse, class, dataset, direct, file, language, log, mock, properties, ref, seda, timer, vm.</p> <p>To use other components, you have to provide the dependencies corresponding to those components in the cMessagingEndpoint component. To do so:</p> <p>Click the plus button to add new lines in the Camel component list. In the line added, select the component you want to use in cMessagingEndpoint. For more information about the commonly used Camel components, see section Commonly used Camel components.</p>
	<i>Use a custom component</i>	<p>If you want to use a custom component, select this check box and click the three-dot button to upload a jar file with your own component.</p> <p> All the transitive dependencies of this custom component should be included in the jar file.</p>
Usage	This component can be used as sending and/or receiving message endpoint according to its position in the Route.	
Limitation	n/a	

Commonly used Camel components

The following table lists the most commonly used Camel components that can be called by **cMessagingEndpoint**.

Component / ArtifactId / URI	Description
ActiveMQ / activemq-camel activemq:[topic:]destinationName	For JMS Messaging with Apache ActiveMQ
Atom / camel-atom atom:uri	Working with Apache Abdera for atom integration, such as consuming an atom feed.
Bean / camel-core bean:beanName[?method=someMethod]	Uses the Camel Bean Binding to bind message exchanges to beans in the Camel Registry. Is also used for exposing and invoking POJO (Plain Old Java Objects).
Cache / camel-cache cache://cachename[?options]	The cache component facilitates creation of caching endpoints and processors using EHCACHE as the cache implementation.
Class / camel-core class:className[?method=someMethod]	Uses the Camel Bean Binding to bind message exchanges to beans in the Camel Registry. Is also used for exposing and invoking POJOs (Plain Old Java Objects).
Context / camel-context context:camelContextId localEndpointName	Used to refer to endpoints within a separate CamelContext to provide a simple black box composition approach so that routes can be combined into a CamelContext and then used as a black box component inside other routes in other CamelContexts
Crypto (Digital Signatures) crypto:sign:name[?options], crypto:verify:name[?options]	Used to sign and verify exchanges using the Signature Service of the Java Cryptographic Extension.
CXF / camel-cxf cxf:address[?serviceClass=...]	Working with Apache CXF for web services integration
CXF Bean / camel-cxf cxf:bean name	Process the exchange using a JAX WS or JAX RS annotated bean from the registry. Requires less configuration than the above CXF Component
CXF RS / camel-cxf cxfrs:address[?resourcesClasses=...]	Working with Apache CXF for REST services integration
Direct / camel-core direct:name	Synchronous call to another endpoint from same CamelContext
Event / camel-spring event://default, spring-event://default	Working with Spring ApplicationEvents
Exec / camel-exec exec://executable[?options]	For executing system commands
File / camel-core file://nameOfFileOrDirectory	Sending messages to a file or polling a file or directory.
Flatpack / camel-flatpack flatpack:[fixed delim]:configFile	Processing fixed width or delimited files or messages using the FlatPack library
Freemarker / camel-freemarker freemarker:someTemplateResource	Generates a response using a Freemarker template
FTP / camel-ftp ftp://host[:port]/fileName	Sending and receiving files over FTP.
FTP / camel-ftp (FTPS) ftps://host[:port]/fileName	Sending and receiving files over FTP Secure (TLS and SSL).
HL7 mina:tcp://hostname[:port]	For working with the HL7 MLLP protocol and the HL7 model using the HAPI library.

Component / ArtifactId / URI	Description
HTTP4 / camel-http4 http4://hostname[:port]	For calling out to external HTTP servers using Apache HTTP Client 4.x
Mail / camel-mail imap://hostname[:port]	Receiving email using IMAP
Jasypt / camel-jasypt jasypt: uri	Simplified on-the-fly encryption library, integrated with Camel.
JCR / camel-jcr jcr://user:password@repository/path/to/node	Storing a message in a JCR (JSR-170) compliant repository like Apache Jackrabbit
JDBC / camel-jdbc jdbc:dataSourceName?options	For performing JDBC queries and operations
Jetty / camel-jetty jetty:url	For exposing services over HTTP
JMS / camel-jms jms:[topic:]destinationName	Working with JMS providers
JMX / camel-jmx jmx://platform?options	For working with JMX notification listeners
JPA / camel-jpa jpa://entityName	For using a database as a queue via the JPA specification for working with OpenJPA , Hibernate or TopLink
Jsch / camel-jsch scp://localhost/destination	Support for the scp protocol.
Log / camel-core log:loggingCategory[?level=ERROR]	Uses Jakarta Commons Logging to log the message exchange to some underlying logging system like log4j
Lucene / camel-lucene lucene:searcherName:insert [?analyzer=<analyzer>]	Uses Apache Lucene to perform Java-based indexing and full text based searches using advanced analysis/tokenization capabilities
Mail / camel-mail mail://user-info@host:port	Sending and receiving email
Mock / camel-core mock:name	For testing routes and mediation rules using mocks
Mail / camel-mail pop3://user-info@host:port	Receiving email using POP3 and JavaMail
MyBatis / camel-mybatis mybatis://statementName	Performs a query, poll, insert, update or delete in a relational database using MyBatis
Properties / camel-core properties://key[?options]	The properties component facilitates using property placeholders directly in endpoint uri definitions.
Quartz / camel-quartz quartz://groupName/timerName	Provides a scheduled delivery of messages using the Quartz scheduler
Ref / camel-core ref:name	Component for lookup of existing endpoints bound in the Camel Registry.
RMI / camel-rmi rmi://host[:port]	Working with RMI

Component / ArtifactId / URI	Description
RSS / camel-rss rss:uri	Working with ROME for RSS integration, such as consuming an RSS feed.
SEDA / camel-core seda:name	Asynchronous call to another endpoint in the same Camel Context
Servlet / camel-servlet servlet:uri	For exposing services over HTTP through the servlet which is deployed into the Web container.
FTP / camel-ftp (SFTP) sftp://host[:port]/fileName	Sending and receiving files over SFTP (FTP over SSH).
Mail / camel-mail smtp://user-info@host[:port]	Sending email using SMTP and JavaMail
SMPP / camel-smpp smpp://user-info@host[:port]?options	To send and receive SMS using Short Messaging Service Center using the JSMPP library
SNMP / camel-snmp snmp://host[:port]?options	Polling OID values and receiving traps using SNMP via SNMP4J library
Spring Integration / camel-spring-integration spring-integration: defaultChannelName	The bridge component of Camel and Spring Integration
SQL / camel-sql sql:select * from table where id=#	Performing SQL queries using JDBC
SSH / camel-ssh ssh:[username[:password]@]host [:port][?options]	For sending commands to a SSH server
Stub stub:someOtherCamelUri	Allows you to stub out some physical middleware endpoint for easier testing or debugging
Test / camel-spring test:expectedMessagesEndpointUri	Creates a Mock endpoint which expects to receive all the message bodies that could be polled from the given underlying endpoint
Timer / camel-core timer://name	A timer endpoint
Velocity / camel-velocity velocity:someTemplateResource	Generates a response using an Apache Velocity template
VM / camel-core vm:name	Asynchronous call to another endpoint in the same JVM
XQuery Endpoint/ camel-saxon xquery:someXQueryResource	Generates a response using an XQuery template
XSLT / camel-spring xslt:someTemplateResource	Generates a response using an XSLT template
Zookeeper zookeeper://host:port/path	Working with ZooKeeper cluster(s)

Scenario 1: Moving files from one message endpoint to another

This scenario uses two **cMessagingEndpoint** components to read and move files from one endpoint to another.




Dropping and linking the components

1. From the **Messaging** folder of the **Palette**, drag and drop two **cMessagingEndpoint** components onto the design workspace, one as the message sender and the other as the message receiver, and label them *Sender* and *Receiver* respectively to better identify their roles in the Route.
2. Right-click the component labeled *Sender*, select **Row** > **Route** in the menu and drag to the *Receiver* to link them together with a route link.

Configuring the components and connections

1. Double-click the component labeled *Sender* to open its **Basic settings** view in the **Component** tab.
2. In the **URI** field, type in the URI of the messages you want to route.

As we are handling files, type in `"file:///"` and the path to the folder containing the files.

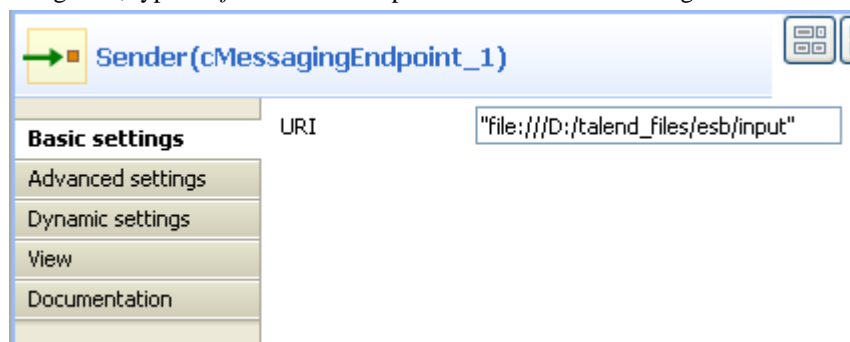

3. Double-click the component labeled *Receiver* to open its **Basic settings** view in the **Component** tab.
4. In the **URI** field, type in the URI of the folder where you want to route your message.

As we are handling files, type in `"file:///"` and the path to the folder to which the files will be sent.



5. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. To have a look at the generated code, click the **Code** tab at the bottom of the design workspace.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Sender")).routeId("Sender").to(
                uriMap.get("Receiver").id(
                    "cMessagingEndpoint_2");
        }
    };
    getCamelContexts().get(0).addRoutes(routeBuilder);
}
```

The code shows the `from` and `.to` corresponding to the two endpoints: `from` for the sending one and `.to` for the receiving one.

2. In the **Run** view, click the **Run** button to launch the execution of your Route.

You can also press **F6** to execute it.

RESULT: The files are moved from their original folder to the target one. Furthermore, a new **.camel** folder is created in the source folder containing the consumed files. This is Camel's default behavior. Thus, the files will not be processed endlessly but they are backed up in case of problems.

Scenario 2: Sending files to another message endpoint

This scenario accesses FTP service and transfers files from one endpoint to another.



Dropping and linking components

1. From the **Messaging** folder of the **Palette**, drag and drop two **cMessagingEndpoint** components onto the design workspace, one as the message sender and the other as the message receiver, and label them *Sender* and *Receiver* respectively to better identify their roles in the Route.
2. Right-click the component labeled *Sender*, select **Row** > **Route** in the menu and drag to the *Receiver* to link them together with a route link.


Configuring the components and connections

1. Double-click the component labeled *Sender* to display its **Basic settings** view in the **Component** tab.
2. In the **URI** field, type in the URI of the message you want to route.

Here, we are using an FTP component: `ftp://indus@degas/remy/camel` with URI specific parameters authenticating the FTP connection: `?username=indus&password=indus`.




3. For the FTP component to work in Camel, click the **Advanced settings** tab of **cMessagingEndpoint**, click the **[+]** button to add a Camel component in the **Dependencies** table, and select *ftp* from the **Camel component** list to activate the FTP component.

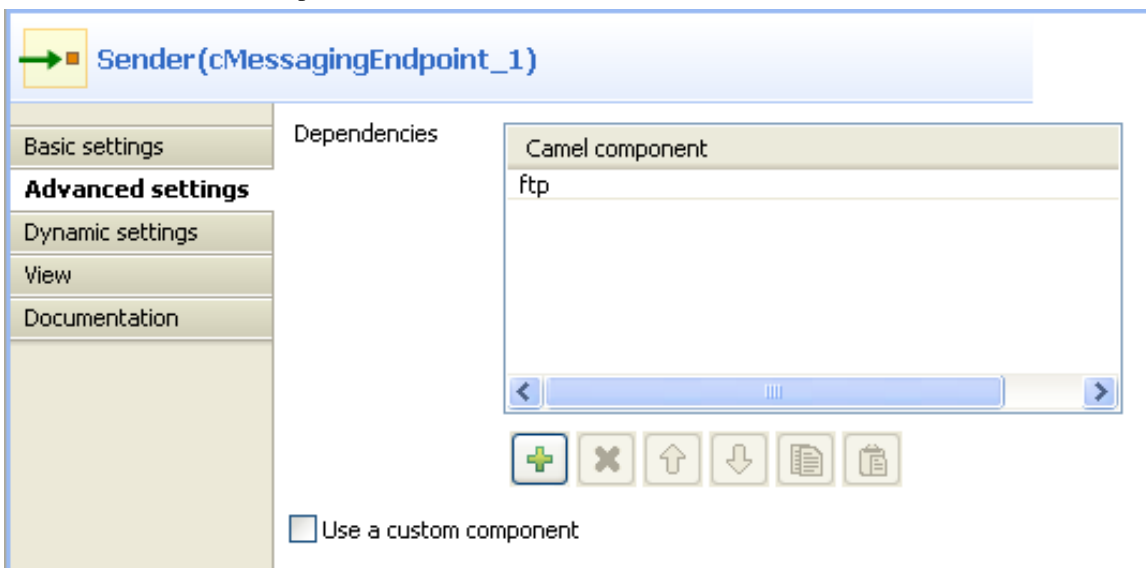

4. Double-click the component labeled *Receiver* to open its **Basic settings** view in the **Component** tab.
5. In the **URI** field, type in the URI of the folder to which you want your message to be routed.

As we are handling files, type in `"file:///"` and the path to the folder to which the files will be sent.

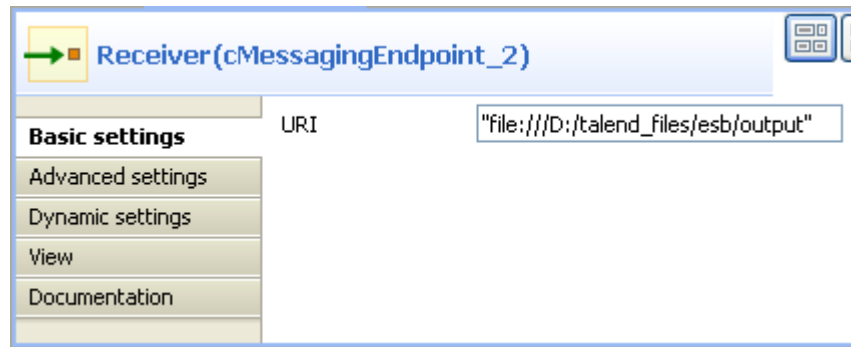

6. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. To have a look at the generated code, click the **Code** tab at the bottom of the design workspace.

```
protected void initUriMap() {
    uriMap = new java.util.HashMap<String, String>();
    uriMap.put("Sender",
        "ftp://indus@degas/remy/camel?username=indus&password=indus");
    uriMap.put("Receiver", "file:///D:/talend_files/esb/output");
}

public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Sender")).routeId("Sender").to(
                uriMap.get("Receiver").id(
                    "cMessagingEndpoint_2");
        }
    };
    getCamelContexts().get(0).addRoutes(routeBuilder);
}
```

In this part of code, we can see a route represented by `from` and `.to`, corresponding to the sending and receiving endpoints.

2. In the **Run** view, click the **Run** button to launch the execution of your Route.

You can also press **F6** to execute it.

RESULT: The message is sent (copied) to the receiving endpoint.

Scenario 3: Using an Xquery endpoint to filter messages


In this scenario, we will use a **cMessagingEndpoint** component to call a Route Resource as an Xquery parser to extract messages from the local file system.

The following sample XML file is used in this scenario:


```
<people>
  <person id="8">
    <firstName>Ellen</firstName>
    <lastName>Ripley</lastName>
    <city>Washington</city>
  </person>
  <person id="9">
    <firstName>Peter</firstName>
    <lastName>Green</lastName>
    <city>London</city>
  </person>
</people>
```

Creating a Route Resource

1. From the repository tree view, right-click the **Resources** node and select **Create Resource** from the context menu.

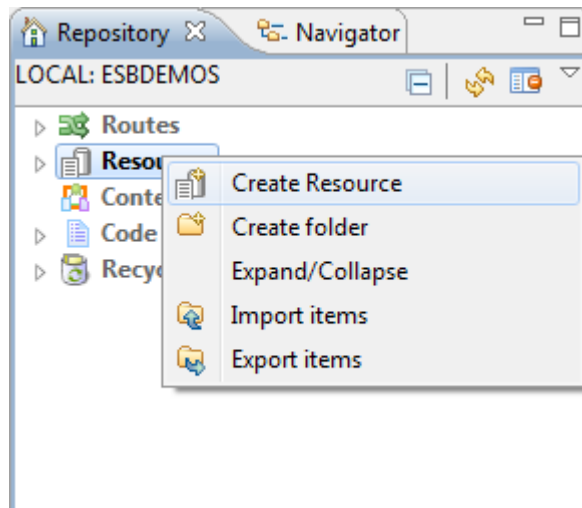

2. The **New Route Resource** wizard opens. In the **Name** field, type in a name for the Resource, for example, *SampleXquery*. Click **Finish** to close the wizard.

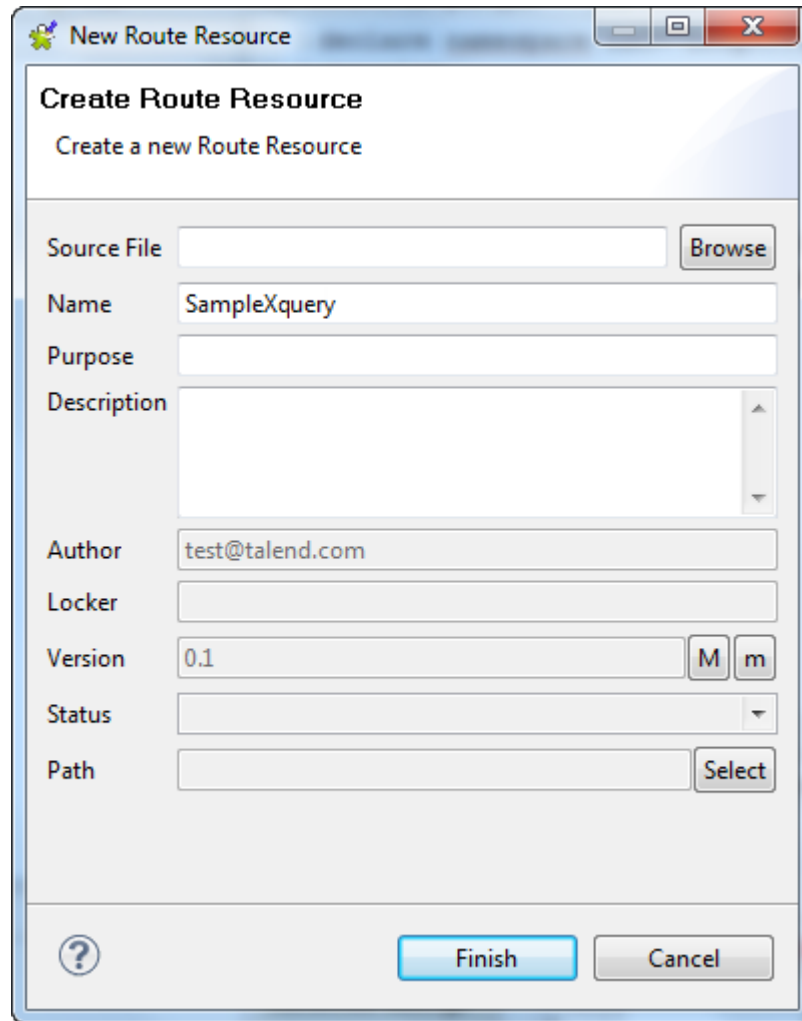

3. Enter the following code in the editor to extract the *firstName* and *lastName* of all the *person* elements.


```

declare namespace ns0="http://com.sap/b" ;
<people>
{
for $p in /people//person
return
    <person>
    <firstName>{$p/firstName/text()}</firstName>
    <lastName>{$p/lastName/text()}</lastName>
    </person>
}
</people>

```

4. Press **Ctrl+S** to save your Route Resource.


Dropping and linking the components

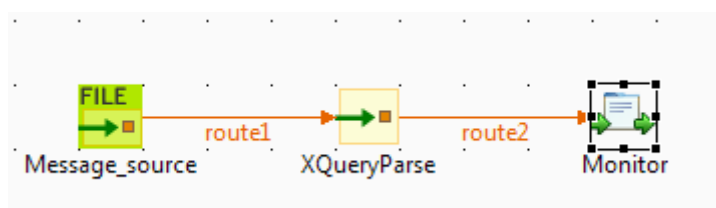


1. From the **Messaging** folder of the **Palette**, drag and drop a **cFile** and a **cMessagingEndpoint** component onto the design workspace.
2. From the **Processor** folder, drag and drop a **cProcessor** component onto the design workspace.
3. Link the components with the **Row > Route** connection as shown above.
4. Label the components for better identification of their functionality.

Configuring the components and connections


1. Double-click the **cFile** component to open its **Basic settings** view in the **Component** tab.

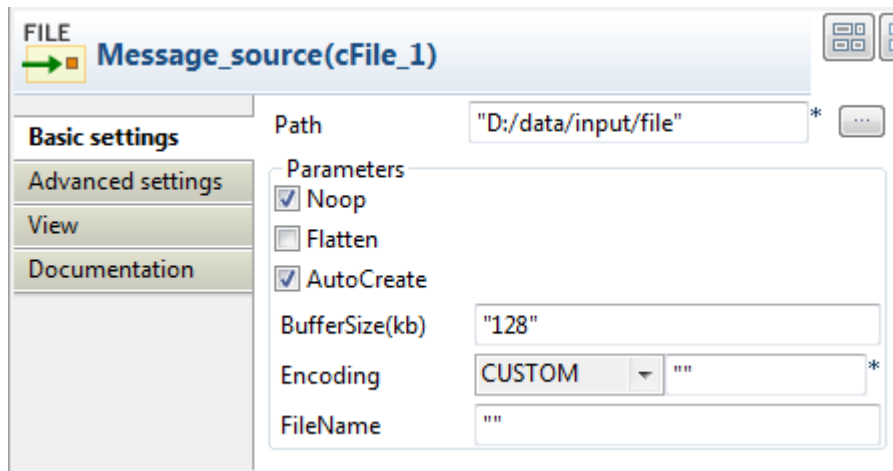


2. In the **Path** field, specify the path where the source file *people.xml* is located.
3. Right-click the Route from the repository tree view and select **Manage Route Resources** from the context menu.

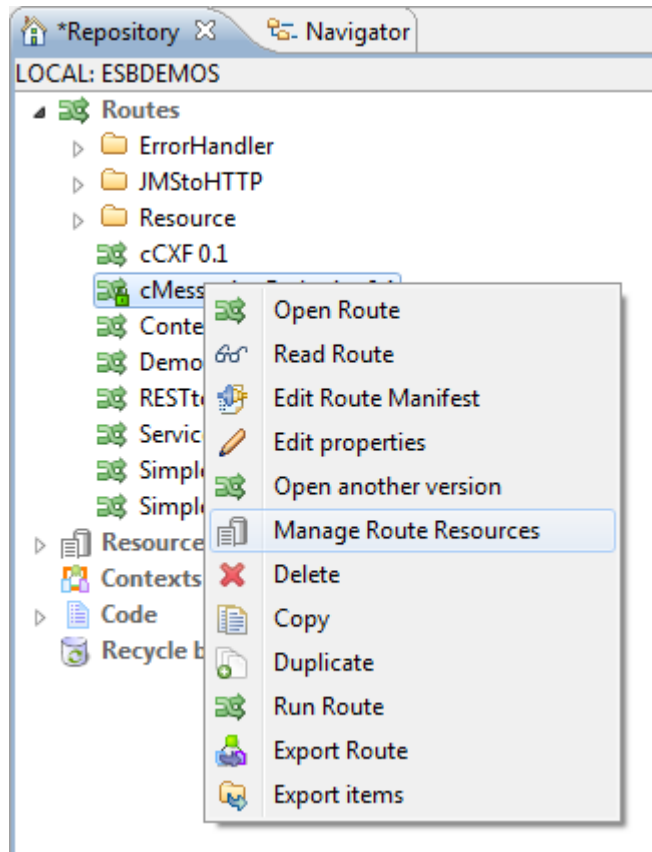


The **Manage Route Resources** wizard is opened.

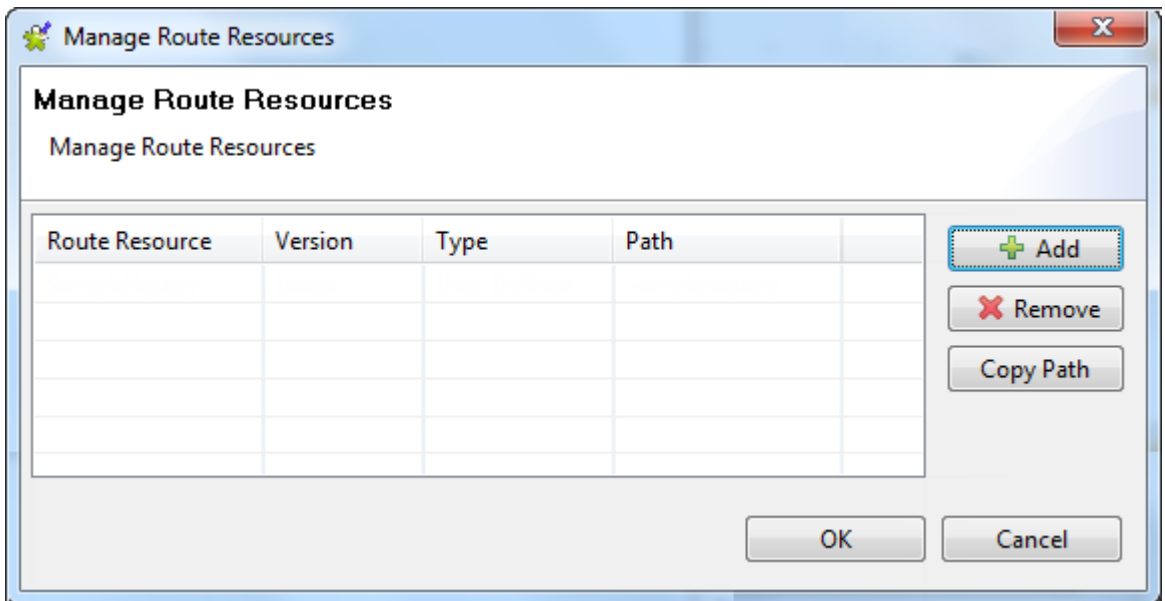


4. In the **Manage Route Resources** wizard, click **Add** and select *SampleXquery* from the Resources tree view in the dialog. Click **OK**.

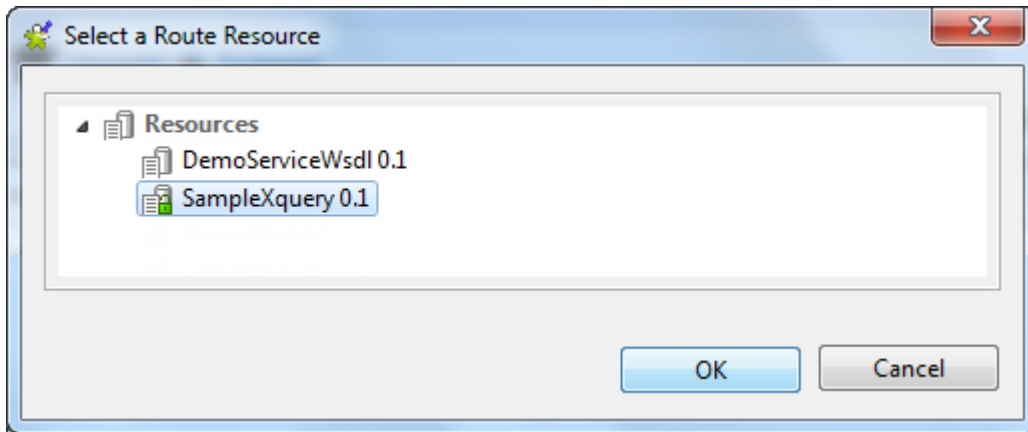


The *SampleXquery* Route Resource is added in the table of the **Manage Route Resources** wizard.

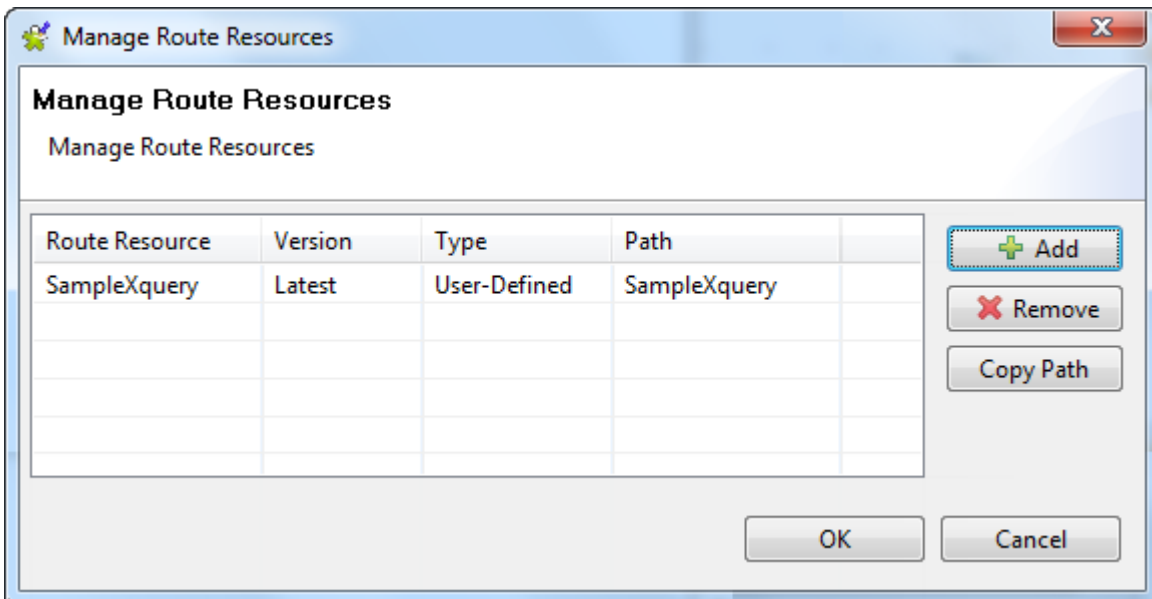


5. Select the *SampleXquery* from the Route Resources list and click **Copy Path**. Click **OK** to close the wizard.
6. Double click the **cMessagingEndpoint** component to display its **Basic settings** view in the **Component** tab.

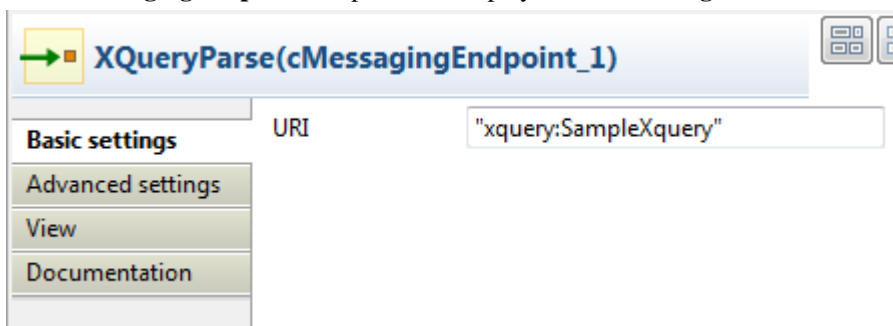

7. In the **URI** field, enter *xquery:* and paste the path of the Route Resource *SampleXquery* that we just copied in double quotation marks.
8. Click the **Advanced settings** tab, add the Camel component **saxon** in the **Dependencies** list. For more information about **Xquery**, see Apache Camel's Website: <http://camel.apache.org/xquery-endpoint.html>.

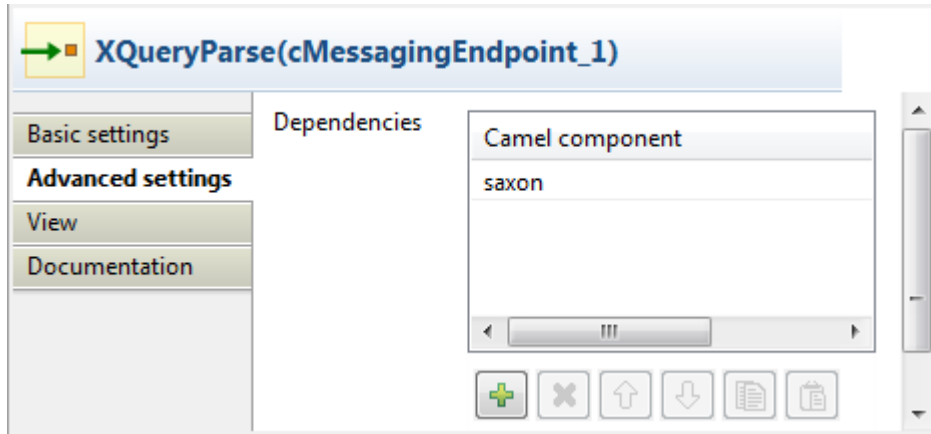

9. Double-click the **cProcessor** component to open its **Basic settings** view in the **Component** tab.

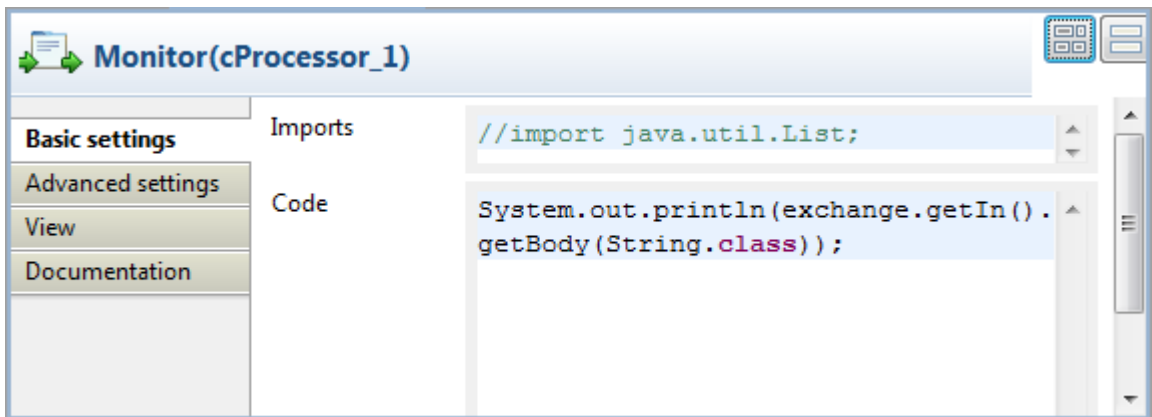

10. In the **Code** area, enter the following code to display the messages intercepted on the console:

```
System.out.println(exchange.getIn().getBody(String.class));
```

11. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. To have a look at the generated code, click the **Code** tab at the bottom of the design workspace.

```


public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Message_source_cFile_1"))
                .routeId("Message_source_cFile_1")
                .to(uriMap
                    .get("XQueryParse_cMessagingEndpoint_1"))
                .id("cMessagingEndpoint_1")
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                            System.out
                                .println("People in London:\n"
                                    + exchange
                                        .getIn()
                                        .getBody(
                                            String.class));
                                }
                })
                .id("cProcessor_1");
        }
    };
}

```

As shown in the code above, the message is routed from Message_source_cFile_1 .to cMessagingEndpoint_1 and then processed by cProcessor_1.

2. In the **Run** view, click the **Run** button to launch the execution of your Route. You can also press **F6** to execute it.

RESULT: The *firstName* and *lastName* of all the *person* elements of the source file is printed in the console.

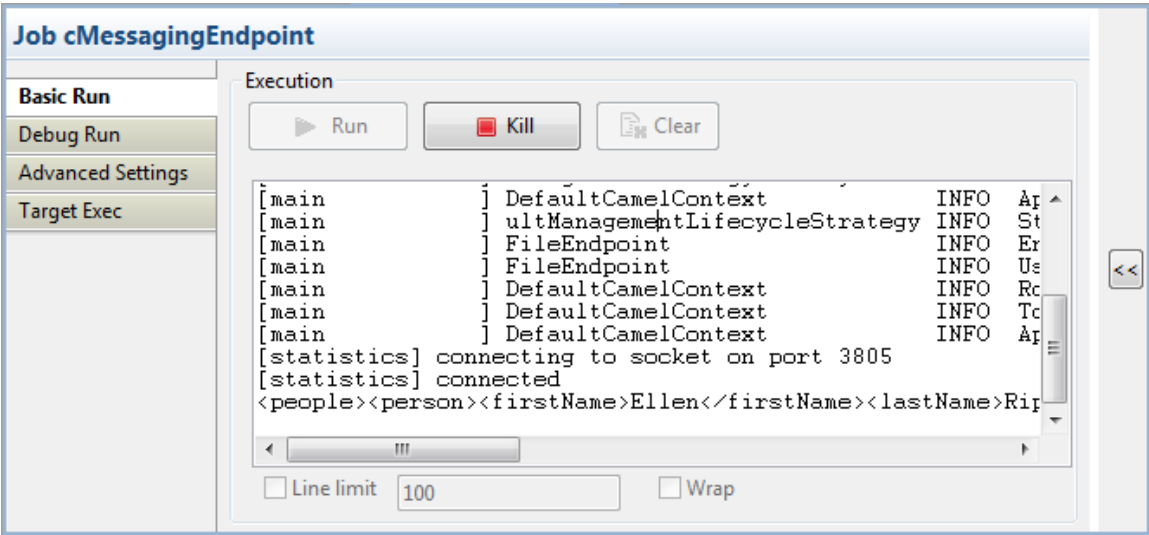

cTimer



cTimer properties

Component Family	Messaging	
Function	The cTimer component generates message exchanges when a timer triggers.	
Purpose	The cTimer component allows you to schedule message exchanges.	
Basic settings	<i>Period</i>	Fill this field with an integer (in milliseconds) to generate message exchanges every period.
	<i>Repeat</i>	Specifies a maximum limit of message exchange numbers. A value of zero or negative will generate message exchanges forever.
	<i>Delay</i>	The number of milliseconds to wait before the first message exchange is generated. This option should not be used with the Set Schedule Time option.
	<i>Fixed Rate</i>	Select this check box to generate message exchanges at regular intervals, separated by the specified period.
	<i>Daemon</i>	Specify whether the thread associated with the timer endpoint runs as a daemon.
	<i>Set Schedule Time</i>	Select this check box to specify the time that the first message exchange should be generated. In the Time field, enter the time using the pattern <code>yyyy-MM-dd HH:mm:ss</code> or <code>yyyy-MM-dd 'T' HH:mm:ss</code> .
Usage	cTimer can only be used as a start component in a Route.	
Limitation	n/a	

Related Scenario:

For a related scenario, see [section *Scenario: Using cDataset to receive messages.*](#)



Miscellaneous components

This chapter details the major components that you can find in **Miscellaneous** family from the **Palette** of the **Mediation** perspective of *Talend Open Studio for ESB*.

The **Miscellaneous** family groups components that cover the needs such as iterating a Route or stopping a Route.

cLog



cLog properties

Component Family	Miscellaneous	
Function	cLog logs message exchanges to the underlying logging mechanism. Apache Camel provides the regular logger and the throughput logger. The default logger logs every exchange. The throughput logger logs exchanges on a group basis. By default regular logging is used.	
Purpose	cLog is used to log message exchanges.	
	<i>Level</i>	Select a logging level from DEBUG , ERROR , INFO , OFF , TRACE , or WARN .
	<i>Use default output log message</i>	Select this option to use the default output log message provided by the underlying logging mechanism.
	<i>Options / None</i> (For default output log message only)	Select this option to take no action on the log message.
	<i>Options / Specifies a group size for throughput logging</i> (For default output log message only)	Select this option to use throughput logging and specify a group size for the throughput logging. Size: Enter an integer that specifies a group size for throughput logging.
	<i>Options / Group message stats by time interval (in millis)</i> (For default output log message only)	Select this option to use throughput logging and group message statistics. Interval: Specify the time interval (in milliseconds) by which the message statistics will be grouped. Delay: Set the initial delay (in milliseconds) for message statistics.
	<i>Options / Format the log output</i> (For default output log message only)	Select this option to format the log output. Click [+] as many times as required to add arguments to the table. Then click the corresponding value field and enter a value. See the site http://camel.apache.org/log.html for available options.
	<i>Specify output log message</i>	Select this option to specify the output log message. Message: Use Simple language to construct a dynamic message which gets logged.
Usage	cLog is used as a middle or end component in a Route.	
Limitation	n/a	

Related scenario:

For a related scenario, see [section Scenario: Routing messages according to a criterion](#).

cLoop



cLoop properties

Component Family	Miscellaneous	
Function	cLoop allows you to process a message or messages a number of times and possibly in different ways.	
Purpose	cLoop is used to process a message or messages repetitively.	
Basic settings	<i>Loop Type</i>	<p>Select a type of loop to be carried out: Expression, Header, or Value.</p> <p>Expression: Use an expression to determine the loop count.</p> <p>Header: Use a header to determine the loop count.</p> <p>Value: Use an argument to set the loop count.</p>
		When using Expression: In the Language field, select the language of the expression you want to use to determine the loop count between Constant , EL , Groovy , Header , Javascript , JoSQL , JXPath , MVEL , None , OGNL , PHP , Property , Python , Ruby , Simple , SpEL , SQL , XPath , XQuery . Type in the expression in the Expression field.
		When using Header: Enter the name of the header that you want to use to determine the loop count in header field.
		When using Value: Enter an integer you want to set as the loop count in the value field.
Usage	cLoop can be a middle component in a Route.	
Limitation	n/a	

Related scenario:

No scenario is available for this component yet.

cStop



cStop properties

Component Family	Miscellaneous
Function	cStop stops the Route to which it is connected.
Purpose	cStop stops the Route to which it is connected.
Usage	cStop is not a start component, but it can be a middle or end component in a Route.
Limitation	n/a

Related scenario:

For a related scenario, see [section *Scenario: Intercepting several routes and redirect them in a single new route*](#) of [section *Intercept*](#).



Processor components

This chapter details the major components that you can find in **Processor** family from the **Palette** of the **Mediation** perspective of *Talend Open Studio for ESB*.

The **Processor** family groups components that help you to perform all types of processing tasks on message flows such monitoring the message sent or received, setting the message exchange mode, controlling the delivery time, and so on.

cBean



cBean properties

Component Family	Processor	
Function	cBean invokes a Java bean that is stored in the Code node of the Repository or registered by a cBeanRegister .	
Purpose	cBean allows you to invoke a Java bean that is stored in the Code node of the Repository or registered by a cBeanRegister .	
Basic settings	<i>Reference</i>	Select this option to reference a Java bean registered by a cBeanRegister . In the Id field that appears, enter the Id of the Java bean.
	<i>New Instance</i>	Select this option to invoke a Java bean that is stored in the Code node of the Repository . In the Bean class field that appears, enter the name of the bean class. For more information about creating and using Java Beans, see <i>Talend Open Studio for ESB User Guide</i> .
	<i>Specify the method</i>	Select this check box to enter the name of a method to be included in the bean.
Usage	cBean can be a start, middle or end component in a Route.	
Limitation	n/a	

Related Scenario

For a related scenario, see:

- **cConvertBodyTo**: [section Scenario: Converting the body of an XML file into an org.w3c.dom.Document.class.](#)

cDelayer




cDelayer properties

Component Family	Processor	
Function	The cDelayer component delays the delivery of messages.	
Purpose	The cDelayer component allows you to set a latency in message routing.	
Basic settings	<i>Time to wait (in ms)</i>	Fill this field with an integer (in milliseconds) to define the time to wait before sending the message to the subsequent endpoint.
Usage	This component is usually used in the middle of a Route.	
Limitation	n/a	

Scenario: Using cDelayer to delay message routing

In this scenario, a **cDelayer** component is used to delay the routing of each message to the target endpoint by 20 seconds.

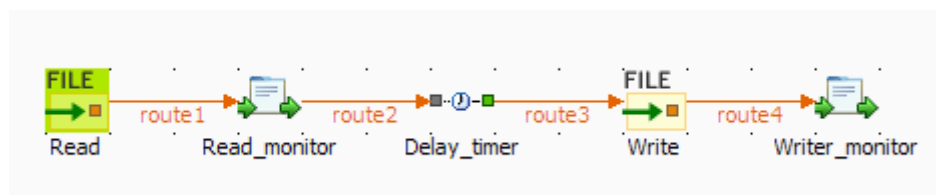


Dropping and linking the components

This use case requires one **cDelayer** component, two **cFile** components, and two **cProcessor** components.


1. From the **Messaging** folder of the **Palette**, drop two **cFile** components onto the design workspace, one to read files from a local folder and the other to write the files to another local folder.
2. From the **Processor** folder of the **Palette**, drop two **cProcessor** components onto the design workspace, one next to the reading component to monitor messages read from the source file folder, and the other next to the writing component to monitor messages written to the target file folder.
3. From the **Processor** folder of the **Palette**, drop one **cDelayer** component onto the design workspace, between the message reading monitor component and the message writing component.
4. Connect the components using **Row > Route** connections.
5. Label the components to better identify their roles in the Route, as shown above.

Configuring the components

1. Double-click the first **cFile** component, which is labelled *Read*, to open its **Basic settings** view in the **Component** tab.

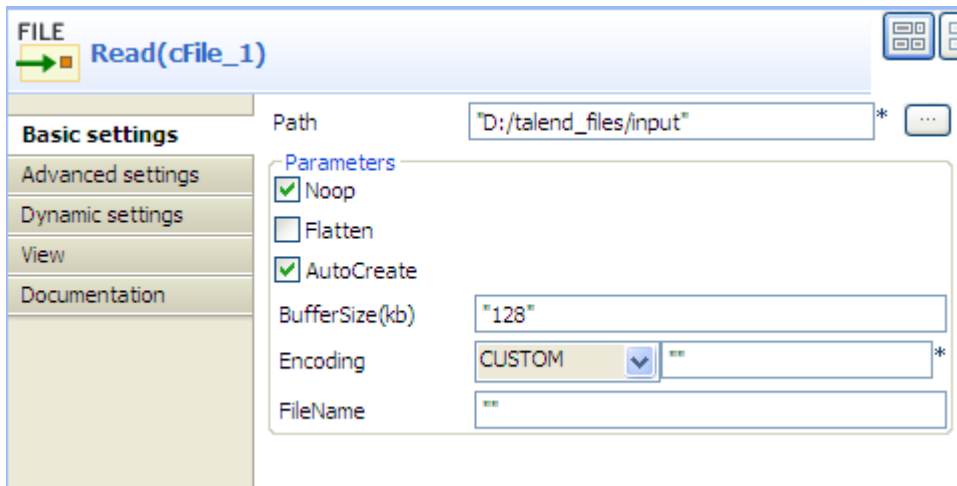

2. In the **Path** field, enter or browse to the path to the source files, and leave the other parameters as they are.
3. Repeat these steps to define the target folder in property settings of the second **cFile** component, which is labelled *Write*.
4. Double-click the first **cProcessor** component, which is labelled *Read_monitor*, to open its **Basics settings** view in the **Component** tab.

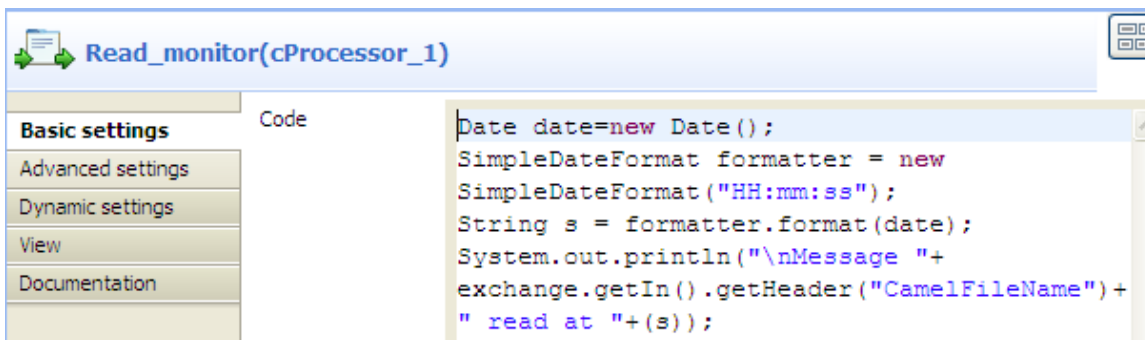


5. In the **Code** area, customize the code to display the time each message is read from the source:

```
Date date=new Date();
SimpleDateFormat formatter = new SimpleDateFormat("HH:mm:ss");
String s = formatter.format(date);
System.out.println("\nMessage "+
exchange.getIn().getHeader("CamelFileName")+
" read at "+(s));
```

6. Repeat these steps to configure the second **cProcessor** component, which is labelled *Write_monitor*, to display the time each message is written to the target:

```
Date date=new Date();
SimpleDateFormat formatter = new SimpleDateFormat("HH:mm:ss");
String s = formatter.format(date);
System.out.println("Message "+
exchange.getIn().getHeader("CamelFileName")+ " written at "+(s));
```

7. Double-click the **cDelayer** component, which is labelled *Delay_timer*, to open its **Basic settings** view in the **Component** tab.

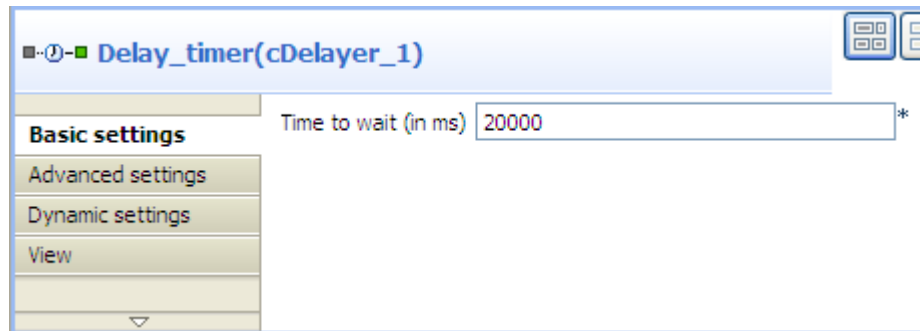

8. In the **Time to wait (in ms)** field, enter the number of milliseconds by which you want to delay message delivery. Note that the value must be a positive integer.

In this use case, we want each message to be delivered after a 20-second delay.

9. Press **Ctrl+S** to save your Route.

Viewing the code and executing the Route


1. Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Read")).routeId("Read").process(
                new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        Date date = new Date();
                        SimpleDateFormat formatter = new SimpleDateFormat(
                            "HH:mm:ss");
                        String s = formatter.format(date);
                        System.out.println("\nMessage "
                            + exchange.getIn().getHeader(
                                "CamelFileName")
                            + " read at " + (s));
                    }
                }
            ).id("cProcessor_1").delay(20000).id(
                "cDelayer_1").to(uriMap.get("Write")).id(
                "cFile_2").process(
```

As shown in the code, a 20-second delay is implemented according to `.delay(20000)` in the message routing from the `Read` endpoint to the `Write` endpoint.

2. Press **F6** to execute the Route.

RESULT: Each message read from the source folder is routed to the target folder after a 20-second delay.

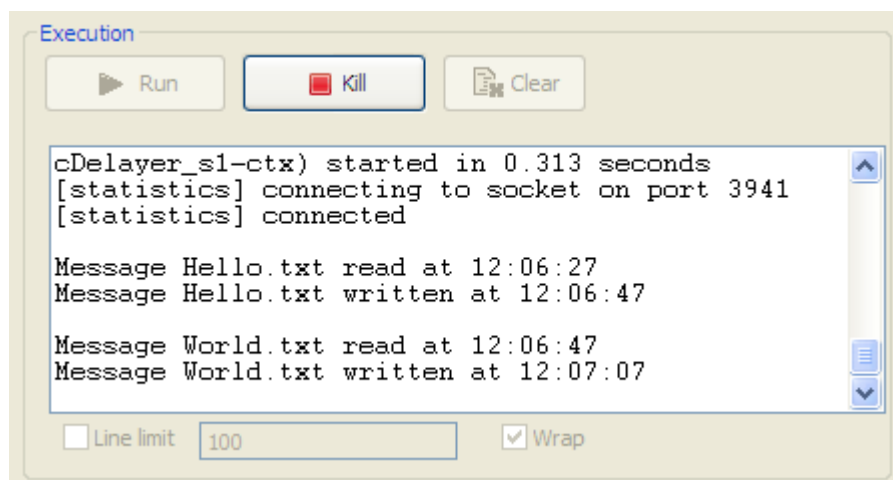

cExchangePattern




cExchangePattern properties

Component Family	Processor	
Function	cExchangePattern can be configured to indicate the message exchange mode.	
Purpose	cExchangePattern allows you to set the message exchange mode.	
Basic settings	Exchange Patterns	Select the message exchange mode from InOnly or InOptionalOut , InOut , OutIn , OutOptionalIn , RobustInOnly , RobustOutOnly .
Usage	As a middle component in a Route, cExchangePattern allows you to set the message exchange mode.	
Limitation		

Scenario: Enabling the InOut exchange pattern to get replies

In this scenario, a cExchangePattern component is used to enable the request/reply exchange pattern in the Route, so that the client can get a reply from the server.

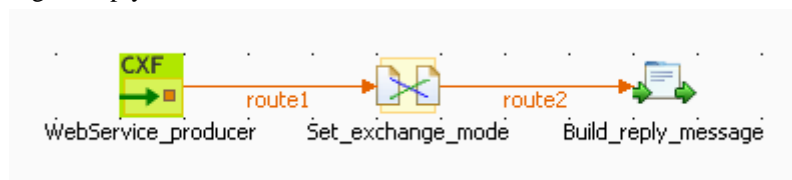

To send requests to the server side, a soapUI is needed and its configuration will be briefed in the following contents.


To build the Route, do the following.

Dropping and linking the components


1. From the **Processor** folder of the **Palette**, drag and drop a **cCXF**, a **cExchangePattern** and a **cProcessor** onto the workspace, and label them *WebService_producer*, *Set_exchange_mode* and *Build_reply_message* respectively to better identify their roles in the Route.
2. Link **cCXF** to **cExchangePattern** using a **Row > Route** connection.
3. Link **cExchangePattern** to **cProcessor** using a **Row > Route** connection.

Configuring the components


1. Double-click **cCXF** to open its **Basic settings** view in the **Component** tab.

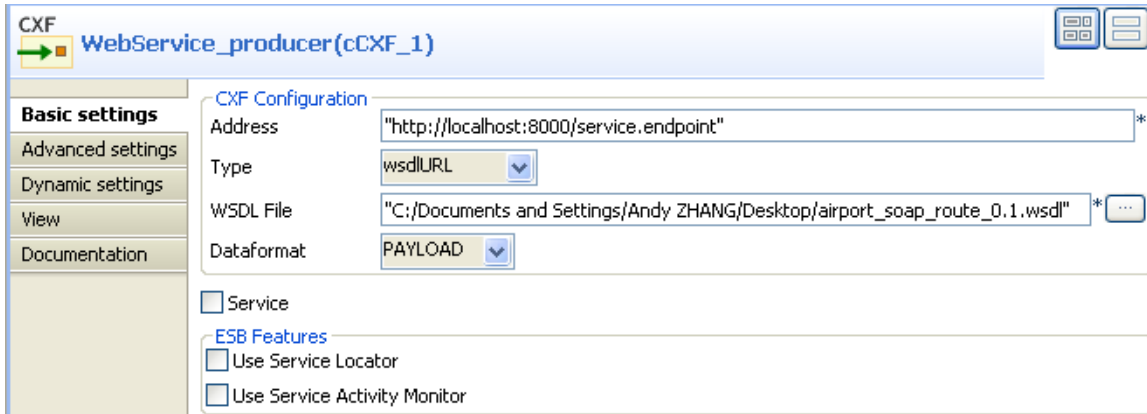

2. In the **Address** field, leave the default setting unchanged.
3. In the **Type** list, select **wsdlURL**.
4. In the **WSDL File** field, enter the URL of the wsdl file. You can also click the three-dot button to browse for it.
5. In the **Dataformat** list, select **PAYLOAD**.
6. Double-click **cExchangePattern** to open its **Basic settings** view in the **Component** tab.

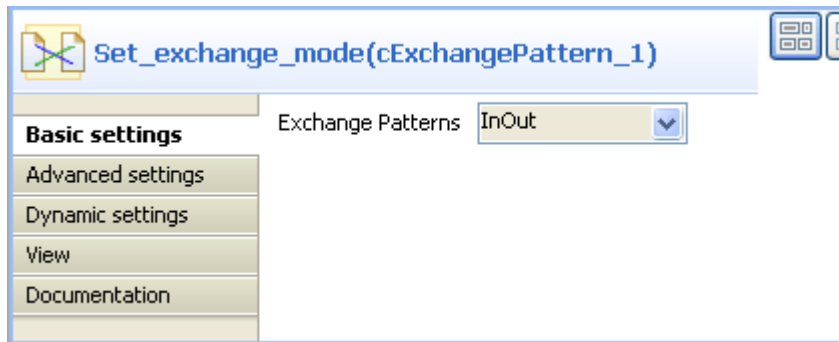

7. In the **Exchange Patterns** list, select **InOut** to enable the request/reply message exchange mode.
8. Double-click **cProcessor** to open its **Basic settings** view in the **Component** tab.

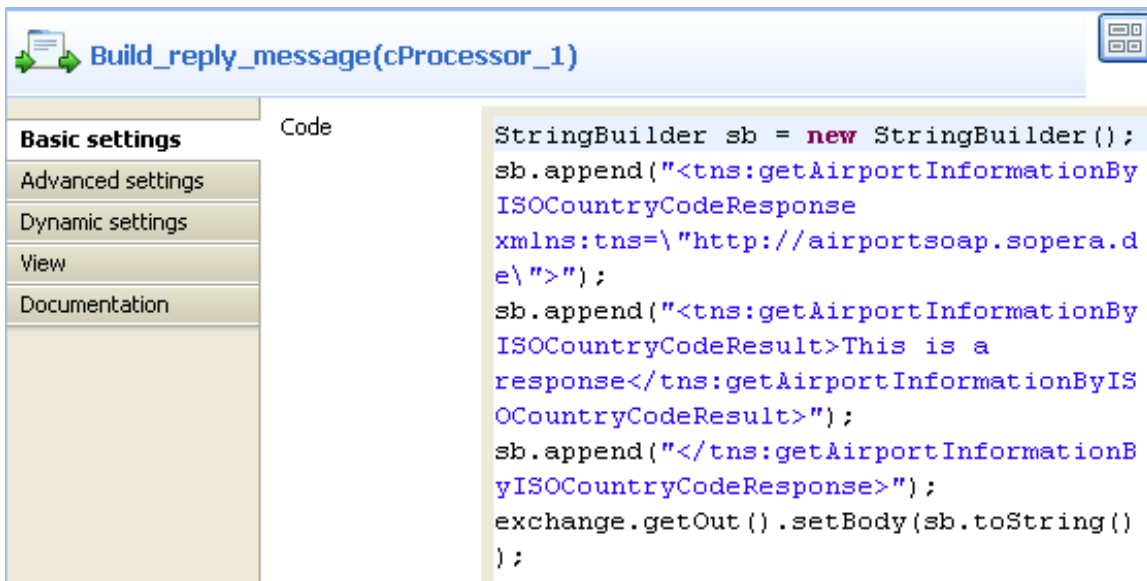

9. In the **Code** box, enter the code below.

```

StringBuilder sb = new StringBuilder();
sb.append("<tns:getAirportInformationByISOCountryCodeResponse xmlns:tns=\"http://airportsoap.sopera.de\">");
sb.append("<tns:getAirportInformationByISOCountryCodeResult>This is a response</tns:getAirportInformationByISOCountryCodeResult>");
sb.append("</tns:getAirportInformationByISOCountryCodeResponse>");
exchange.getOut().setBody(sb.toString());

```

As shown above, a string is built here and is used as a reply message of the route. It is in line with the message definition of the above wsdl file.

10. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to check the generated code.

```

public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            // CXF endpoint for WebService producer
            org.apache.camel.Endpoint endpointWebService_producer = endpoint(uriMap
                .get("WebService_producer"));
            from(endpointWebService_producer).routeId(
                "WebService_producer").setExchangePattern(
                org.apache.camel.ExchangePattern.InOut).id(
                "cExchangePattern_1").process(
                new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                            StringBuilder sb = new StringBuilder();
                            sb.append("<tns:getAirportInformationByISOCountryCodeResponse " +
                                "xmlns:tns=\"http://airportsoap.sopera.de\">");
                            sb.append("<tns:getAirportInformationByISOCountryCodeResult> " +
                                "This is a response</tns:getAirportInformationByISOCountryCodeResult>");
                            sb.append("</tns:getAirportInformationByISOCountryCodeResponse>");
                            exchange.getOut().setBody(
                                sb.toString());
                        }
                }
            ).id("cProcessor_1");
        }
    };
}

```


As shown above, the route has its message exchange pattern set as `InOut` using the method `.setExchangePattern(org.apache.camel.ExchangePattern.InOut)`. In the meantime, a string is created using `StringBuilder sb = new StringBuilder()` at `cProcessor_1` and is used as the reply message via the method `exchange.getOut().setBody(sb.toString())`.

2. Press **F6** to execute the Route.

The server Route gets started.


Creating and sending a request to the server Route and getting a reply

1. In the soapUI, create a Test project and edit a request, as illustrated below:

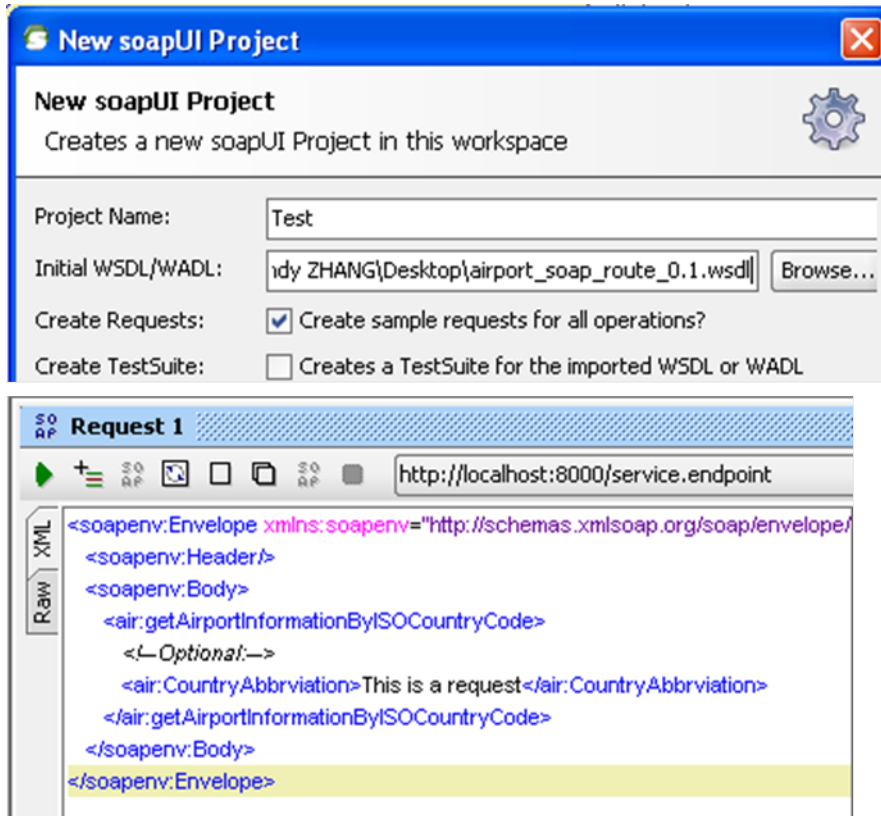

Note that the wsdl file must be same as that configured for cCXF, so that the request can be in line with the definition of the web service.

2. Send the request to the server Route and you can get the reply, as illustrated below:

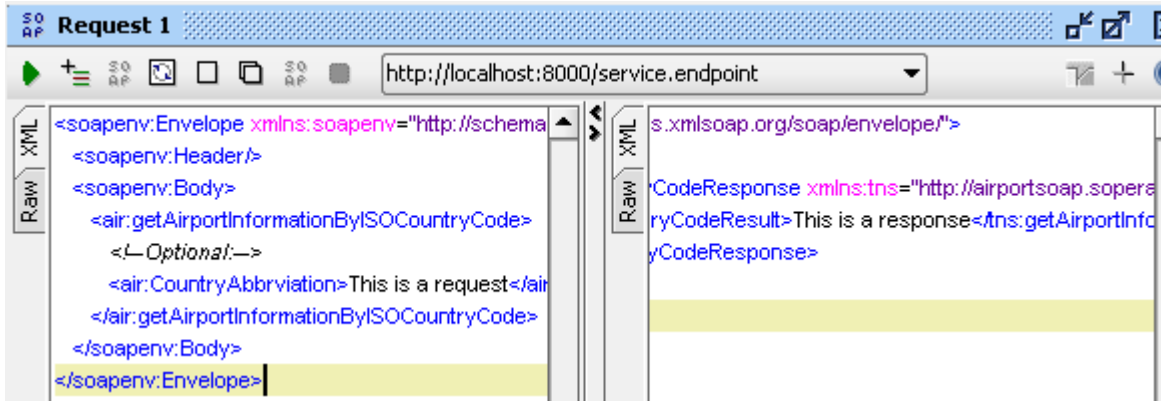

cJavaDSLProcessor



cJavaDSLProcessor properties

Component Family	Processor	
Function	cJavaDSLProcessor implements producers and consumers of message exchanges or implements a Message Translator using the Java Domain Specific Language (DSL).	
Purpose	cJavaDSLProcessor can be usable for quickly whirling up some code using Java DSL. If the code in the inner class gets a bit more complicated it is of course advised to refactor it into a separate class.	
Basic settings	<i>Code</i>	Type in the code you want to implement using Java DSL.
Usage	cJavaDSLProcessor is used as a middle or end component in a Route.	
Limitation	n/a	

Related scenario:

For a related scenario, see [section *Scenario: Wiretapping a message in a Route*](#).

cProcessor



cProcessor properties

Component Family	Processor	
Function	cProcessor implements consumers of message exchanges or implements a Message Translator.	
Purpose	cProcessor can be usable for quickly whirling up some code. If the code in the inner class gets a bit more complicated it is of course advised to refactor it into a separate class.	
Basic settings	<i>Imports</i>	Enter the Java code that helps to import, if necessary, external libraries used in the Code box.
	<i>Code</i>	Type in the Java code you want to implement.
Usage	cProcessor is used as a middle or end component in a Route.	
Limitation	n/a	

Related scenario:

For a related scenario, see [section *Scenario: Intercepting several routes and redirect them in a single new route*](#) of [section *cIntercept*](#).

cTalendJob



cTalendJob properties


Component Family	Processor	
Function	cTalendJob calls a Data Integration Job either from the repository or exported as an OSGI Bundle For ESB.	
Purpose	cTalendJob allows you to call a Data Integration Job in a Mediation Route. For more information on how to build a Job and how to export a Job as an OSGI Bundle for ESB, see <i>Talend Open Studio for ESB User Guide</i> .	
Basic settings	<i>Repository</i>	Select this option to call a Job from the Repository.
	<i>External</i>	Select this option to call a Job that is exported as an OSGI Bundle For ESB.
	<i>Job</i>	This field appears when Repository is selected. Click [...] to show the Job Designs tree view and select the Job that you want to call in your Route.
	<i>Version</i>	This field appears when Repository is selected. Select the version of the Job if more than one version of the Job is available.
	<i>Library</i>	This field appears when External is selected. Select the library you want to import from the list, or click on the [...] button to import the jar library of your Job.
	<i>Job</i>	This field appears when External is selected. Type in the name of the package and the name of your job separated by a point. For example: <code>route_project.xmlmap_0_1.tXMLMap</code> To get this naming, you can open the jar library of your Job, go to OSGI-INF > blueprint and edit the job.xml file, the naming is available in a bean node like <code><bean id="job" class="route_project.xmlmap_0_1.tXMLMap" /></code>
	<i>Context</i>	Select from the list or type in the name of the context to use to execute your Job.
Usage	cTalendJob can be a start, middle or end component in a Route.	
Limitation	n/a	

Scenario: Using camel message headers as context parameters to call a job


In this scenario, a Data Integration Job is built with a context variable defined in the **Integration** perspective. Then, a Route is established in the **Mediation** perspective with the message header defined the same as the context variable in the DI Job. Meanwhile, a **cTalendJob** component is deployed to call the DI Job and pass the value of the Route's message header to the DI Job's context variable.

Building a DI Job and exporting it as an OSGI Bundle for ESB


1. In the **Integration** perspective, drop the following components from the **Palette** onto the workspace: **tFixedFlowInput** and **tLogRow**.
2. Link the components using a **Row > Main** connection.

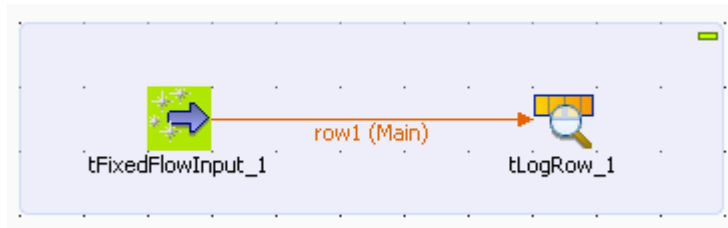

3. Double-click **tFixedFlowInput** to open its **Basic settings** view in the **Component** tab.

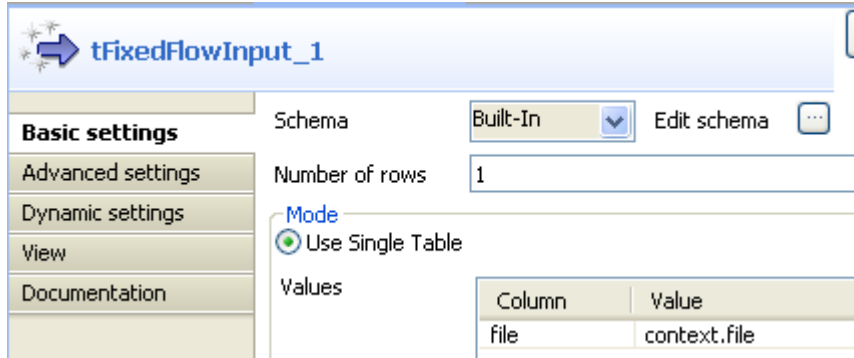

4. Click the [...] button next to **Edit schema** to open the schema editor.

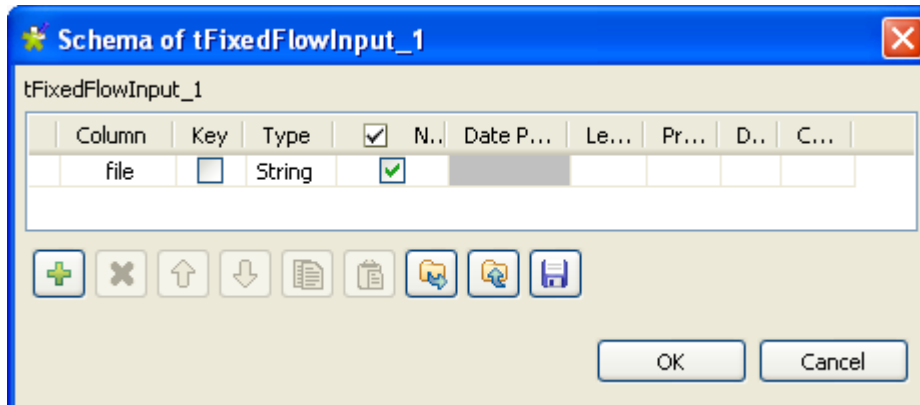

Click the [+] button to add a line.

Enter *file* as the column name and choose *String* as the data type.


Click **OK** to close the editor.

5. Select the **Use Single Table** option and enter *context.file* as the value.

Note that the context *default* with the variable *file* has been defined.

For more information about the context setup, see *Talend Open Studio for ESB User Guide*.

6. Double-click **tLogRow** to open its **Basic settings** view in the **Component** tab.

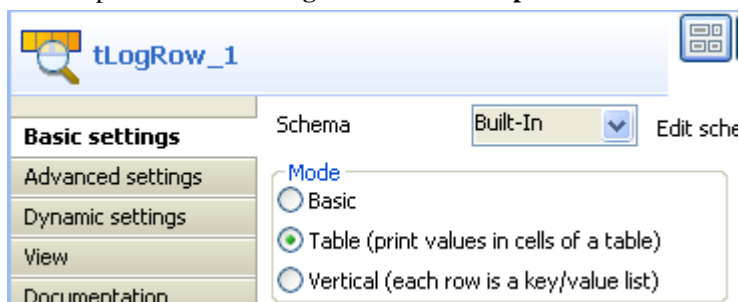


7. Select **Table** (**print values in cells of a table** for a better display).
8. Press **Ctrl+S** to save the Job.
9. Export the Job as an *OSGI Bundle for ESB*.
10. Unzip the generated jar file.

Building a Route for exchanging messages and calling the DI Job


1. In the **Mediation** perspective, drop the following components from the **Palette** onto the workspace: **cFile**, **cSetHeader** and **cTalendJob**, respectively labelled as **File_Source**, **Set_Header** and **Call_DI-Job**.
2. Link the components using a **Row > Route** connection.



3. Double-click **cFile** to open its **Basic settings** view in the **Component** tab.

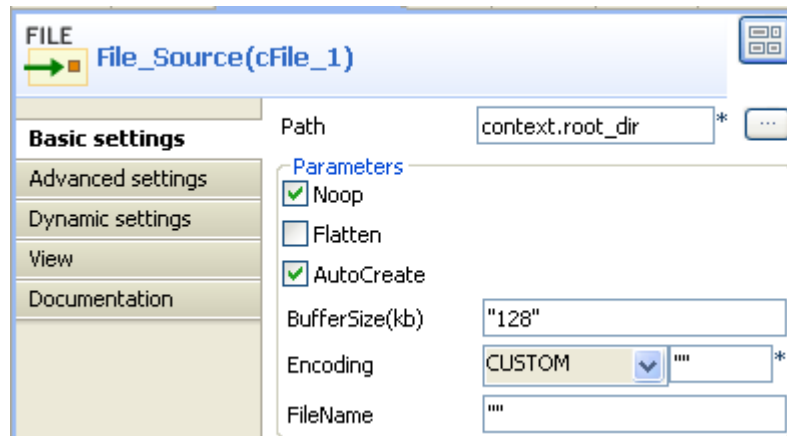

4. In the **Path** field, enter the variable `context.root_dir` to specify the file path.
Keep other default settings as they are.
For more information about the context setup, see *Talend Open Studio for ESB User Guide*.
5. Double-click **cSetHeader** to open its **Basic settings** view in the **Component** tab.

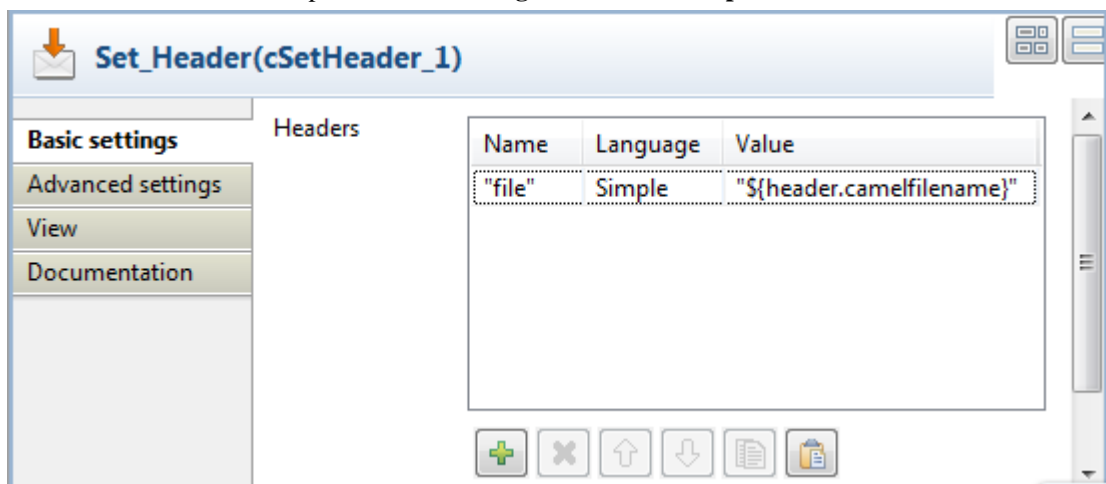


- Click **[+]** to add a row to the **Headers** table.

In the **Name** field, enter *file*, which is the same as the context variable of the DI Job.

Select *Simple* from the **Language** list.

In the **Value** field, enter *`\${header.camelfilename}`* to get the file name.

- Double-click **cTalendJob** to open its **Basic settings** view in the **Component** tab.

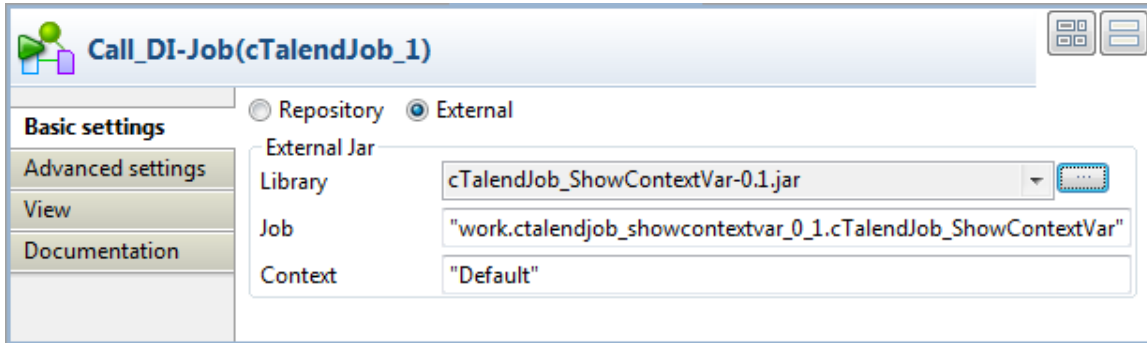

- Select the **External** option and click the **[...]** button to browse the generated jar file for the DI Job.
- Go to the unzipped folder of the above JAR file and open the *job.xml* in the *<DI_Job_JAR_Path>\OSGI-INF\blueprint* folder, *E:\cTalendJob_ShowContextVar-0.1\OSGI-INF\blueprint* in this example.

Go to the *bean* tag and copy the content of the attribute *class*, *work.ctalendjob_showcontextvar_0_1.cTalendJob_ShowContextVar* in this example.

Paste it in the **Job** field.

- Press **Ctrl+S** to save the Route.

Viewing the code and executing the Route

- Click the **Code** tab at the bottom of the design workspace to check the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("File_Source"))
                .routeId("File_Source")
                .setHeader("file")
                .simple("${header.camelfilename}")
                .id("cSetHeader_1")
                .to(
                    "talend:"
                    + "work.ctalendjob_showcontextv"
                    + "?context=" + "Default").id(
                    "cTalendJob_1");
        }
    };
}
```

As shown above, *File_Source* provides a file for the message exchange, *cSetHeader* sets a message header and uses the source file name as the header value, and finally that value is passed to *cTalendJob_1* for execution of the DI Job.

- Press **F6** to execute the Route.

- Put a file into the folder specified by *context.root_dir*, *test mail.txt* in this example.

The result below can be found.

```
[statistics] connecting to socket on port 3471
[statistics] connected
-----
| tLogRow_1 |
|-----|
| file      |
|-----|
| test mail.txt |
|-----|
```

As shown above, the source file name is displayed via **tLogRow** as the Route's message header value has been passed to the context variable of the DI Job.



Routing components




This chapter details the major components that you can find in **Routing** family from the **Palette** of the **Mediation** perspective of *Talend Open Studio for ESB*.

The **Routing** family groups components that moves messages from one endpoint to another based on a set of conditions.

cAggregate



cAggregate

Component Family	Routing	
Function	cAggregate aggregates messages together according to specified conditions.	
Purpose	cAggregate allows you to combine a number of messages together into a single message.	
Basic settings	<i>Language</i>	Select the language of the expression you want to use to filter your messages, from Constant, EL, Groovy, Header, Javascript, JoSQL, XPath, MVEL, None, OGNL, PHP, Property, Python, Ruby, Simple, SpEL, SQL, XPath, and XQuery .
	<i>Correlation expression/Expression</i>	Type in the expression that evaluates the correlation key to be used for the aggregation.
	<i>Strategy</i>	Specify a Java bean to use as the aggregation strategy.
	<i>Completion conditions/Number of messages</i>	Select this check box to specify the number of messages to aggregate per batch before the aggregation is complete.  By default, this check box is selected and the number of messages is set to 3. If you clear this check box, and at least one of the other four completion conditions is met, all the messages retrieved will be aggregated in one batch.
	<i>Completion conditions/Inactivity timeout (in milliseconds)</i>	Select this check box to specify the time (in milliseconds) that an aggregated exchange should be inactive before it is complete. This option can be set as either a fixed value or using an Expression which allows you to evaluate a timeout dynamically.  You can not use this option together with Scheduled interval . Only one of them can be used at a time.
	<i>Completion conditions/Scheduled interval (in milliseconds)</i>	Select this check box to specify a repeating period (in milliseconds) by which the aggregator will complete all current aggregated exchanges.  You cannot use this option together with Inactivity timeout . Only one of them can be used at a time.
	<i>Completion conditions/Predicate matched</i>	Select this check box to specify a predicate to indicate when an aggregated exchange is complete.
	<i>Completion conditions/Batch consumer</i>	Select this check box to aggregate all files consumed from a file endpoint in a given poll.
Advanced settings	<i>Check completion before aggregating</i>	Select this check box to check for completion when a new incoming exchange has been received. This option influences the behavior of the Predicate matched option as the exchange being passed in changes accordingly. When this option is disabled, the exchange passed in the predicate is the <i>aggregated</i> exchange which means any information you may store on the aggregated exchange from the aggregation strategy is available for the predicate. When this option is enabled, the exchange passed in the predicate is the <i>incoming</i> exchange, which means you can access data from the incoming exchange.
	<i>Close correlation group</i>	Select this check box to indicate that if a correlation key has already been completed, then any new exchanges with the same correlation key will be denied. When using this option, enter a number in

		the Maximum bound field to keep that last number of closed correlation keys.
	<i>Ignore invalid correlation key</i>	Select this check box to ignore the invalid correlation key which could not be evaluated to a value. By default Camel will throw an Exception on encountering an invalid correlation key.
	<i>Group arriving exchange</i>	Select this check box to group all aggregated exchanges into a single combined holder class that holds all the aggregated exchanges. As a result only one exchange is being sent out from the aggregator. This option can be used to combine many incoming exchanges into a single output exchange.
	<i>Use persistence</i>	Select this check box to plug in your own implementation of the repository which keeps track of the current in-flight aggregated exchanges. By default, Camel uses a memory based implementation.
	<i>Repository</i>	This field appears when the Use persistence check box is selected. The repository is AggregationRepository , HawtDBAggregationRepository , or RecoverableAggregationRepository .
		AggregationRepository : The default repository used by Camel which is a memory based implementation. Enter the name of the repository in the field.
		<p>HawtDBAggregationRepository: HawtDBAggregationRepository is an AggregationRepository which persists the aggregated messages on the fly. This ensures that you will not loose messages. With this repository selected, the following options appear:</p> <p>Use persistent file: Select this check box to store the aggregated exchanges in a file. Enter the name of the file for the persistent storage in the Persistent file field. If the file does not exists on startup, it will be created.</p> <p>Recovery/Use recovery: Select this check box to recover failed aggregated exchanges and have them resubmitted automatically. In the Recovery interval field, enter the interval (in milliseconds) to scan for failed exchanges to recover and resubmit. By default this interval is 5000 milliseconds. In the Dead letter channel field, enter an endpoint URI for a Dead Letter Channel where exhausted recovered exchanges will be moved. In the Maximum redeliveries field, enter the maximum number of redelivery attempts for a given recovered exchange.</p>
		<p>RecoverableAggregationRepository: RecoverableAggregationRepository is a JDBC based AggregationRepository which persists the aggregated messages on the fly. This ensures that you will not loose messages. Enter the name of the repository in the field.</p> <p>With this repository selected, the following options appear:</p> <p>Recovery/Use recovery: Select this check box to recover failed aggregated exchanges and have them resubmitted automatically. In the Recovery interval field, enter the interval (in milliseconds) to scan for failed exchanges to recover and resubmit. By default this interval is 5000 milliseconds. In the Dead letter channel field, enter an endpoint URI for a Dead Letter Channel where exhausted recovered exchanges will be moved. In the Maximum redeliveries field, enter the maximum number of redelivery attempts for a given recovered exchange.</p>
Usage	cAggregate is used as a middle or end component in a Route.	
Connections	<i>Aggregate</i>	Select this link to route messages to the next endpoint according to the selected aggregation strategy.
	<i>Route</i>	Select this link to route all the messages from the sender to the next endpoint.
Limitation	n/a	


Scenario: Aggregating three messages into one

In this scenario, the **cAggregate** component combines three messages from the local file system into one and prints the messages in the console. A Java bean will be used as the aggregation strategy.


Creating a Java bean as the aggregation strategy

To aggregate the messages, we will use a Java bean that will help us build an aggregation strategy.

1. From the repository tree view, expand the **Code** node and right click the **Beans** node. In the contextual menu, select **Create Bean**.

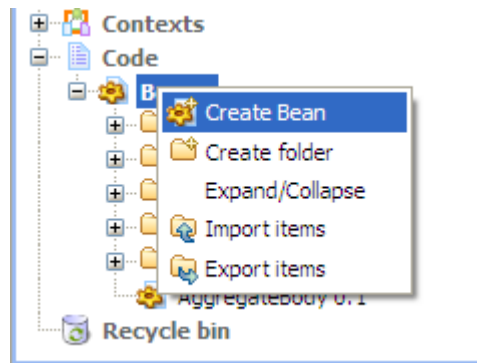

2. The **New Bean** wizard opens. In the **Name** field, type in a name for the bean, for example, *AggregateBody*. Click **Finish** to close the wizard.

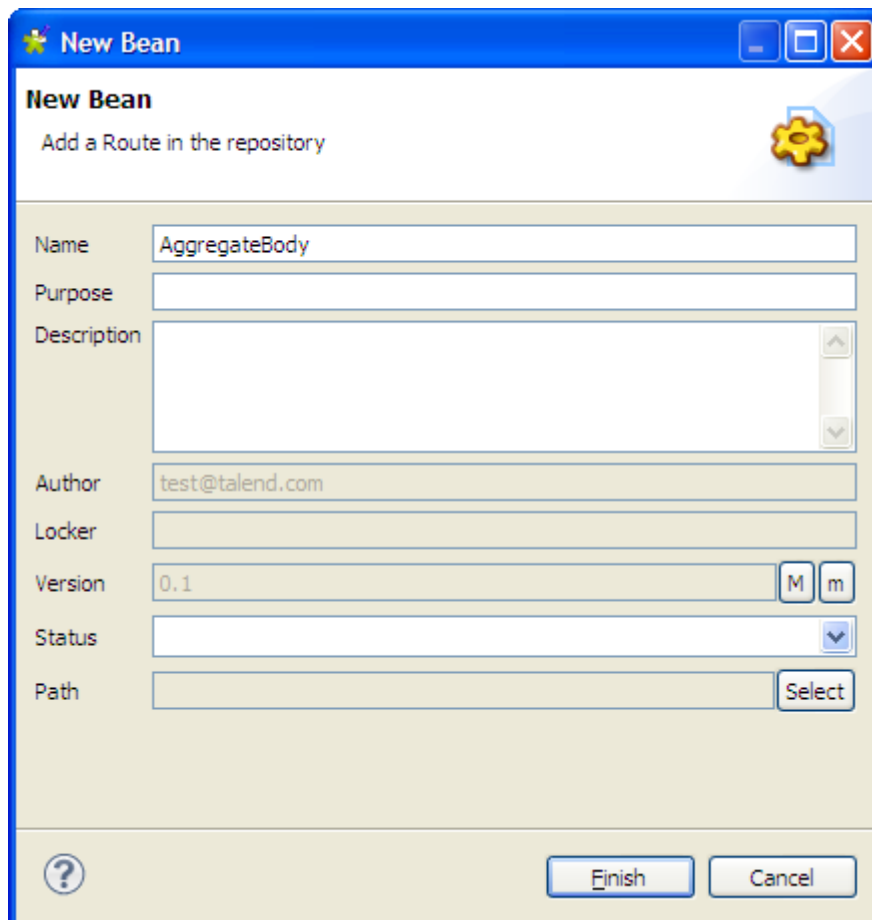

- Type in the codes as shown in the figure below. In this use case, we just want to aggregate all messages into a single message.

```
package beans;


import org.apache.camel.Exchange;
import org.apache.camel.processor.aggregate.AggregationStrategy;

public class AggregateBody implements AggregationStrategy{

    public Exchange aggregate(Exchange oldEx, Exchange newEx) {
        if(oldEx==null){
            return newEx;
        }
        String oldBody = oldEx.getIn().getBody(String.class);
        String newBody = newEx.getIn().getBody(String.class);
        newEx.getIn().setBody(oldBody+newBody);
        return newEx;
    }
}
```

- Press **Ctrl+S** to save your bean.


Dropping and linking the components

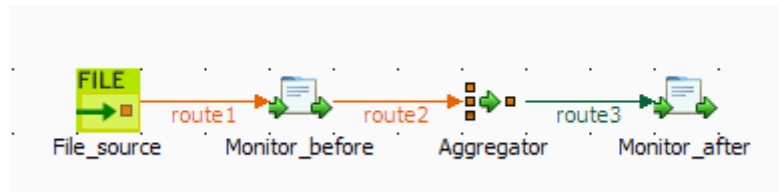

- From the **Palette**, expand the **Messaging** folder, and drop a **cFile** component onto the design workspace.
- Expand the **Routing** folder, and drop a **cAggregate** component onto the design workspace.
- Expand the **Processor** folder, and drop two **cProcessor** components onto the design workspace.
- Right-click the **cFile** component, select **Row > Route** from the contextual menu and click the first **cProcessor** component.
- Repeat this operation to connect the first **cProcessor** component to the **cAggregate** component.
- Right-click the **cAggregate** component, select **Row > Aggregate** from the contextual menu and click the second **cProcessor** component.
- Label all the components to better identify their functionality, as shown above.

Configuring the components


- Double-click the **cFile** component, which is labelled *File_source*, to display its **Basic settings** view in the **Component** tab.

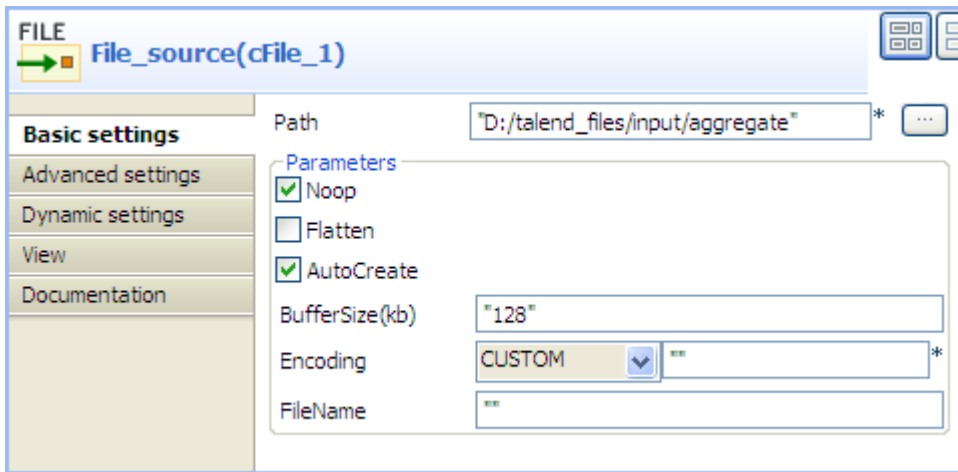

- In the **Path** field, browse to or enter the input file path, and leave the other parameters as they are.

In this scenario, there are four text files in the specified directory: *a.txt*, *b.txt*, *c.txt* and *d.txt*, the contents of which are *This is a!*, *This is b!*, *This is c!*, and *This is d!* respectively.

- Double-click the **cAggregate** component, which is labelled *Aggregator*, to display its **Basic settings** view in the **Component** tab.

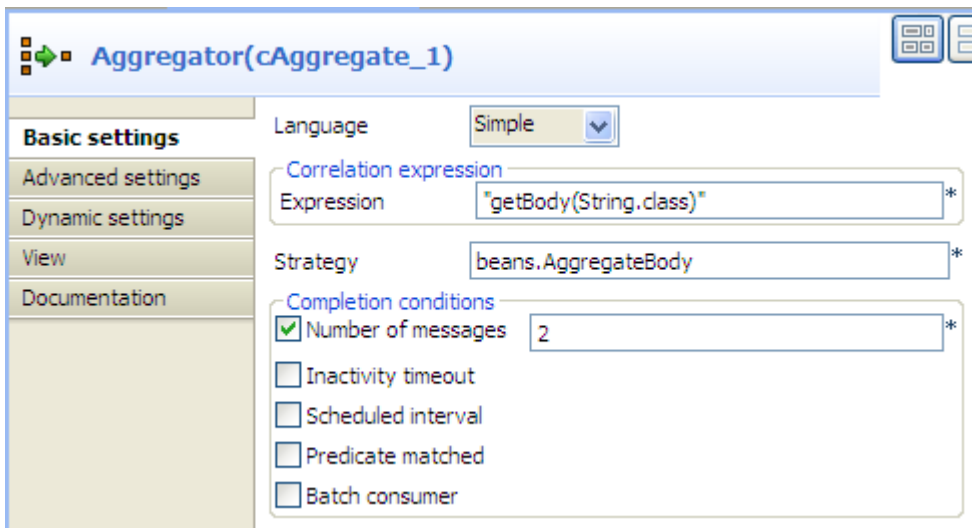


- In the **Language** field, select **Constant** or **Simple** as the expression language.

In the **Expression** field, enter the expression `"getBody(String.class)"` to retrieve the body of the message.

In the **Strategy** field, enter the name of the Java bean *AggregateBody* you just created.

Select the **Number of messages** check box and type in 2 in the field.

- Double-click the **cProcessor** component labelled *Monitor_before* to display its **Basic settings** view in the **Component** tab.

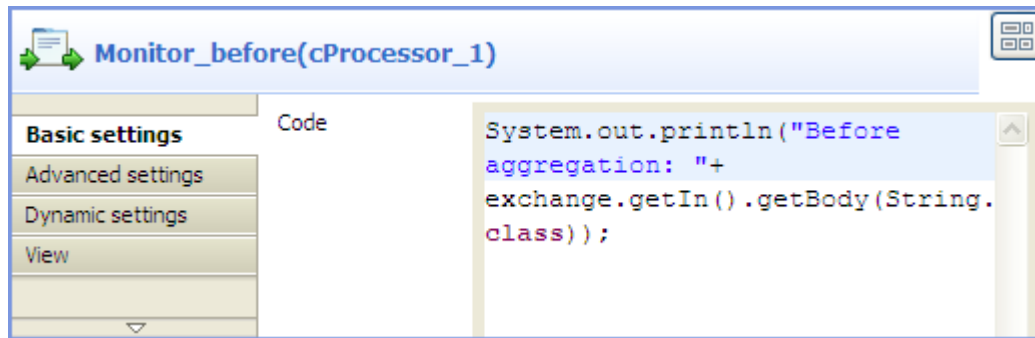

6. In the **Code** box, customize the code as follows so that the **Run** console displays the message contents before an aggregation takes place:

```
System.out.println("Before aggregation: "+
exchange.getIn().getBody(String.class));
```

7. In the same way, configure the **cProcessor** component labelled *Monitor_after* so that the Run console displays the message contents after an aggregation takes place:

```
System.out.println("After aggregation: "+
exchange.getIn().getBody(String.class));
```

8. Press **Ctrl+S** to save your route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```

public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("File_source"))
                .routeId("File_source")
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        System.out
                            .println("Before aggregation: "
                                + exchange
                                    .getIn()
                                    .getBody(
                                        String.class));
                    }
                });

            .id("cProcessor_1").aggregate(
                simple("getBody(String.class)",
                    new beans.AggregateBody())
                .completionTimeout(1000)
                .completionFromBatchConsumer().id(
                    "cAggregate_1").process(
                    new org.apache.camel.Processor() {
                        public void process(
                            org.apache.camel.Exchange exchange)
                            throws Exception {
                            System.out
                                .println("After aggregation: "
                                    + exchange
                                        .getIn()
                                        .getBody(
                                            String.class));
                        }
                    });


            .id("cProcessor_2");
        }
    };
}

```

As shown in the code, a message from the `File_source` endpoint is routed via `cProcessor_1` and then aggregated according to the condition `.aggregate`.

- Click the **Run** view to display it and click the **Run** button to launch the execution of your route. You can also press **F6** to execute it.

RESULT: The four messages are aggregated in two batches, two messages combined into one each batch.

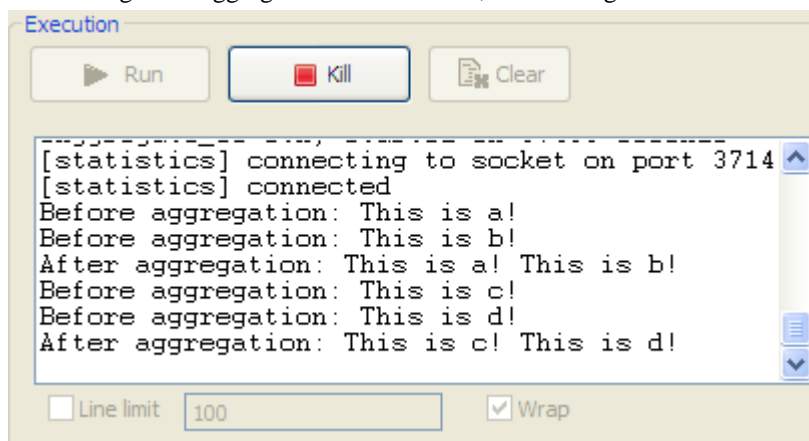

cDynamicRouter



cDynamicRouter properties

Component Family	Routing	
Function	cDynamicRouter allows you to route messages while avoiding the dependency of the router on all possible destinations.	
Purpose	cDynamicRouter is used to route a message or messages to different endpoints on specified conditions.	
Basic settings	<i>Bean class</i>	Enter the name of the bean class to be used for the dynamic router.
	<i>Specify the method</i>	Select this check box to specify the method to be used which is defined in the bean class.
	<i>Ignore Invalid Endpoints</i>	Select this check box to ignore unresolved endpoint URIs. Clear the check box to throw an exception when endpoint URIs are not valid.
Usage	cDynamicRouter is used as a middle or end component in a Route.	
Limitation	n/a	

Scenario: Routing files conditionally to different file paths

In this scenario, three file messages containing people information are routed to different endpoints according to the city names they contain.

The following is an extract of the example XML files used in this use case:

Message_1.xml:

```
<person>
  <firstName>Ellen</firstName>
  <lastName>Ripley</lastName>
  <city>Washington</city>
</person>
```

Message_2.xml:

```
<person>
  <firstName>Peter</firstName>
  <lastName>Green</lastName>
  <city>London</city>
</person>
```

Message_3.xml:

```
<person>
  <firstName>Alice</firstName>
```

```
<lastName>Yang</lastName>
<city>Beijing</city>
</person>
```

A predefined Java bean, *setDynaURI*, is called in this use case to return endpoint URIs according to the city name contained in each message, so that the message containing the city name *Washington* will be routed to endpoint *Washington* and so forth.

For more information about creating and using Java Beans, see *Talend Open Studio for ESB User Guide*.


```
package beans;

import org.apache.camel.Exchange;
import org.apache.camel.Header;
import org.w3c.dom.Document;
import org.w3c.dom.Element;
import org.w3c.dom.NodeList;

public class setDynaURI {

    public String setURI(Document document,
        @Header(Exchange.SLIP_ENDPOINT) String previous) {
        if(previous!=null){
            return null;
        }
        NodeList cities = document.getDocumentElement().getElementsByTagName(
            "city");
        Element city = (Element) cities.item(0);
        String textContent = city.getTextContent();
        return "direct:"+textContent;
    }
}
```

Dropping and linking the components

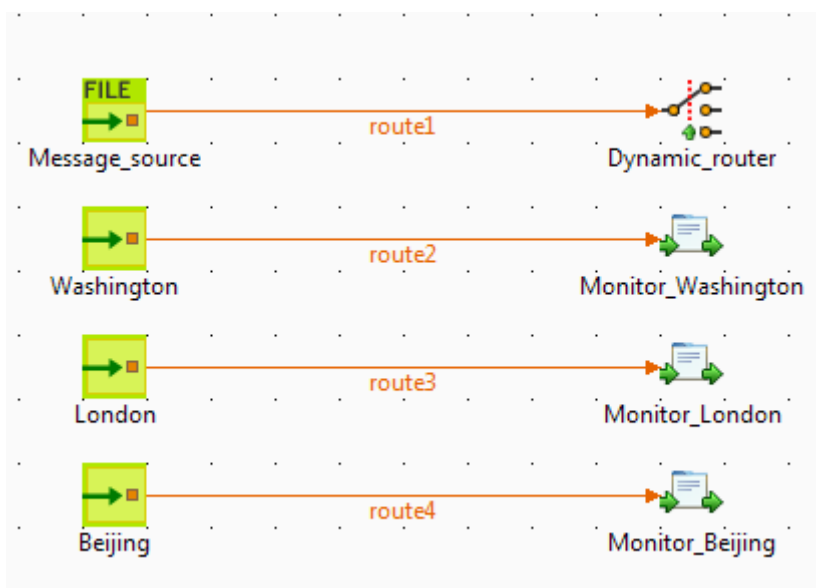


1. From the **Palette**, expand the **Messaging** folder, and drop one **cFile** and three **cMessagingEndpoint** components onto the design workspace.
2. Expand the **Routing** folder, and drop a **cDynamicRouter** component onto the design workspace.

3. Expand the **Processor** folder, and drop three **cProcessor** components onto the design workspace.
4. Label the components for better identification of their respective functionality.
5. Right-click the **cFile** component, select **Row > Route** from the contextual menu and click the **cDynamicRouter** component.
6. Repeat this operation to connect the **cMessagingEndpoint** components to the **cProcessor** components.


Configuring the components and connections

1. Double-click the input **cFile** component to display its **Basic settings** view in the **Component** tab and set its properties.

In this use case, simply specify the input file path and leave the other parameters as they are.

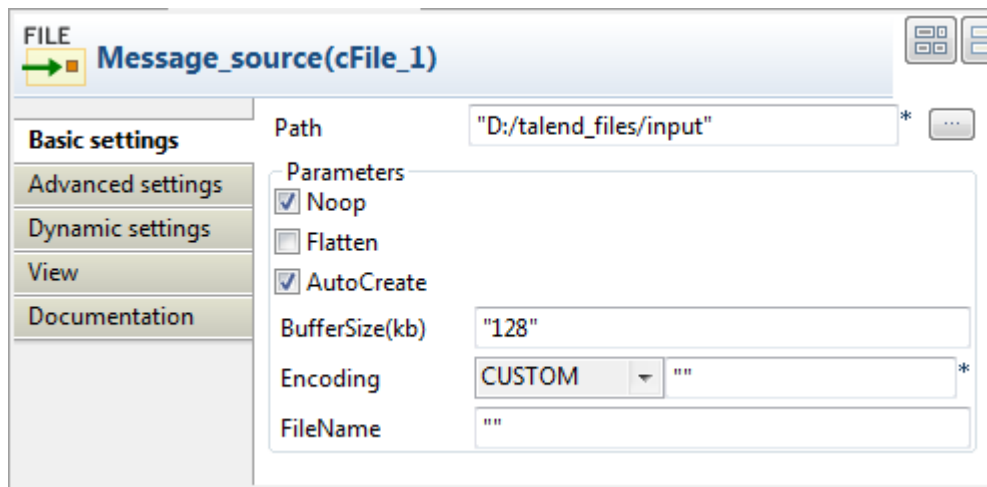


2. Double-click the **cDynamicRouter** component to display its **Basic settings** view in the **Component** tab.
3. In the **Bean class** field, type in the name of the predefined Java bean. Leave the **Specify the method** check box unselected as there is only one method in the Java bean and leave the **Ignore Invalid Endpoints** check box unselected if you want the component to throw an exception when endpoint URIs are not valid.

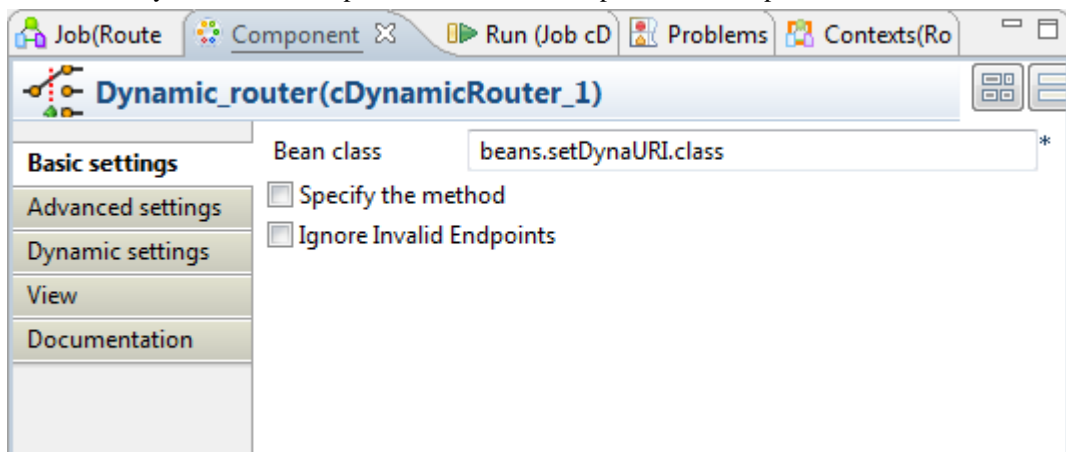


4. Double-click the first **cMessagingEndpoint** component, which is labelled *Washington*, to display its **Basic settings** view in the **Component** tab, and type in the URI in the **URI** field for the destination of your message.

Here, we want to use this component to retrieve the message routed to the URI *direct:Washington*, as shown below.

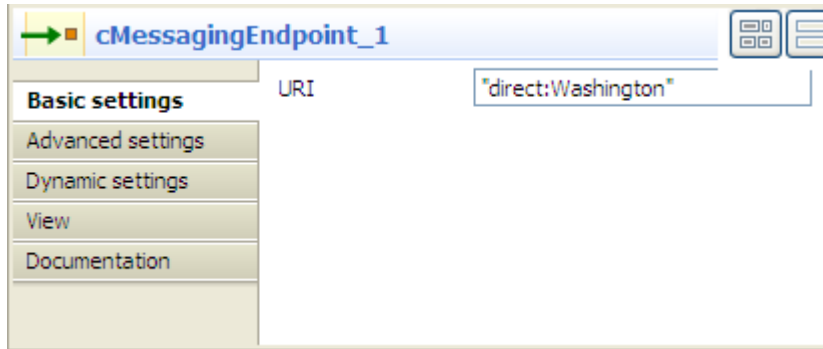

5. Repeat this step to set the endpoint URIs for the other two **cMessagingEndpoint** components: *direct:London* and *direct:Beijing* respectively.
6. Double-click the first **cProcessor** component, which is labelled *Monitor_Washington*, to display its **Basic settings** view in the **Component** tab.

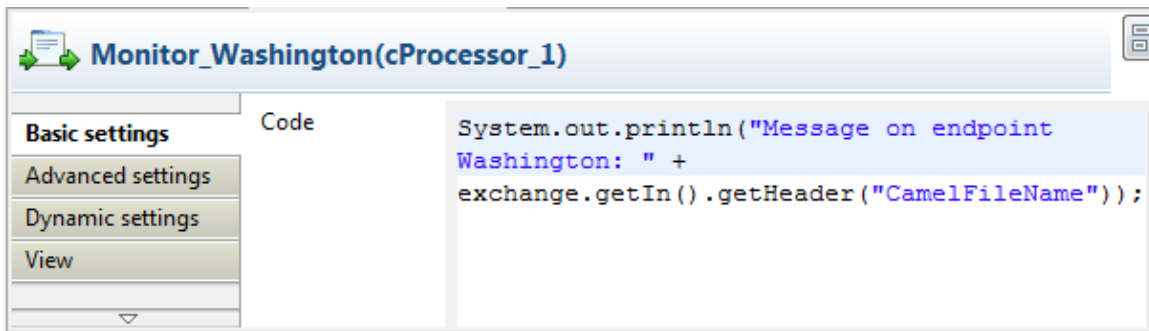

7. In the **Code** box, customize the code to display the file name of the message routed to the endpoint *Washington* on the console.

```
System.out.println("Message on endpoint Washington: " +
exchange.getIn().getHeader("CamelFileName"));
```

8. Repeat these steps to configure the other two **cProcessor** components to display the file names of the messages routed to the endpoints *London* and *Beijing* respectively.
9. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.


```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Message_source")).routeId(
                "Message_source").dynamicRouter(
                bean(beans.setDynaURI.class)).id(
                "cDynamicRouter_1");
            from(uriMap.get("Washington")).routeId("Washington")
```

As shown in the code, the incoming message from the endpoint *Message_source* is routed by `.dynamicRouter` to endpoints the URIs of which are dynamically set according to `beans.setDynaURI.class`.

2. Click the **Run** view to display it and click the **Run** button to launch the execution of your Route.

You can also press **F6** to execute it.

RESULT: The source messages are routed to different endpoints based on the city names contained in the messages.

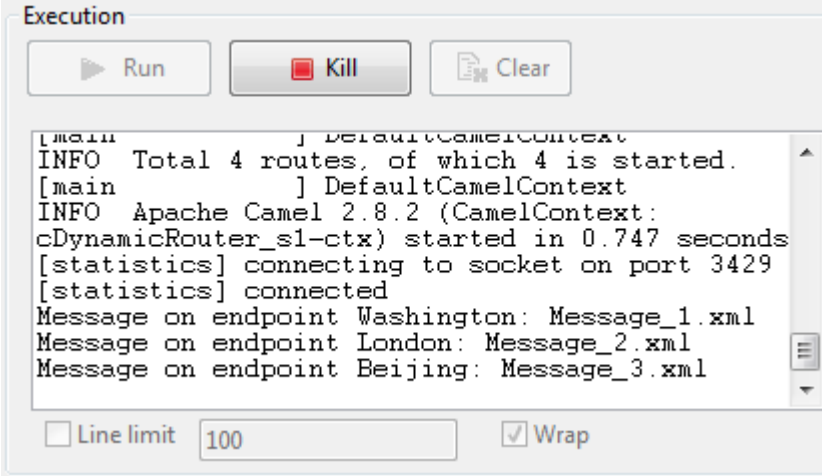


```
[main ] DefaultCamelContext
INFO Total 4 routes, of which 4 is started.
[main ] DefaultCamelContext
INFO Apache Camel 2.8.2 (CamelContext:
cDynamicRouter_sl-ctx) started in 0.747 seconds
[statistics] connecting to socket on port 3429
[statistics] connected
Message on endpoint Washington: Message_1.xml
Message on endpoint London: Message_2.xml
Message on endpoint Beijing: Message_3.xml
```

Line limit Wrap

cIdempotentConsumer



cIdempotentConsumer properties

Component Family	Routing	
Function	cIdempotentConsumer deduplicates messages and thereby prevents the receiving message endpoint from receiving duplicate messages.	
Purpose	cIdempotentConsumer identifies messages that have already been sent to the receiver and eliminates them. Messages are still sent by the sender but are ignored by the receiver at the delivery stage.	
Basic settings	<i>Repository Type</i>	<p>Message identifiers need to be stored in a repository. For new incoming messages, identifiers are checked against the ones stored in the repository to identify and drop duplicates. There are two ways to store them:</p> <p>Memory: messages identifiers are stored temporarily.</p> <p> <i>The in-memory storage mode can easily run out of memory and does not work in a clustered environment.</i></p> <p>File: messages identifiers are stored in a file. Specify the path to this file in the File store field.</p>
	<i>File store</i>	Specify the path and name of the file storing messages identifiers.
	<i>Cache Size</i>	Type in the size of the cache, namely the number of message identifiers to store.
	<i>Use language</i>	Select this check box if you want to specify the language used in the Predicate field to specify the identifier of the messages.
	<i>Expression</i>	Type in the expression to use to specify the identifier of the messages.
	<i>Eager</i>	<p>Select this check box to detect duplicate messages even when messages are currently in progress; clear it to detect duplicates only when messages have successfully been processed.</p> <p>By default, this check box is selected.</p>
	<i>SkipDuplicate</i>	<p>Select this check box to drop duplicates; clear it to ignore duplicates so that all messages will be continued.</p> <p>By default, this check box is selected.</p>
	Usage	cIdempotentConsumer is used as a middle component in a Route.
Connections	<i>idemp</i>	The idemp link retrieves messages deduplicated by the cIdempotentConsumer component.
	<i>Route</i>	As an optional link, the Route link retrieves all messages from the message sender.
Limitation	n/a	

Scenario: Deduplicating messages while routing them


In this scenario, duplicated messages are filtered and only the unique one is routed to the destination.

Three XML files that have the same content, as shown below, are used in this use case.

```
<people>
  <person id="8">
    <firstName>Ellen</firstName>
    <lastName>Ripley</lastName>
    <city>Washington</city>
  </person>
</people>
```

Dropping and linking the components


This use case requires one **cFile** component, one **cIdempotentConsumer** component, and two **cProcessor** components.

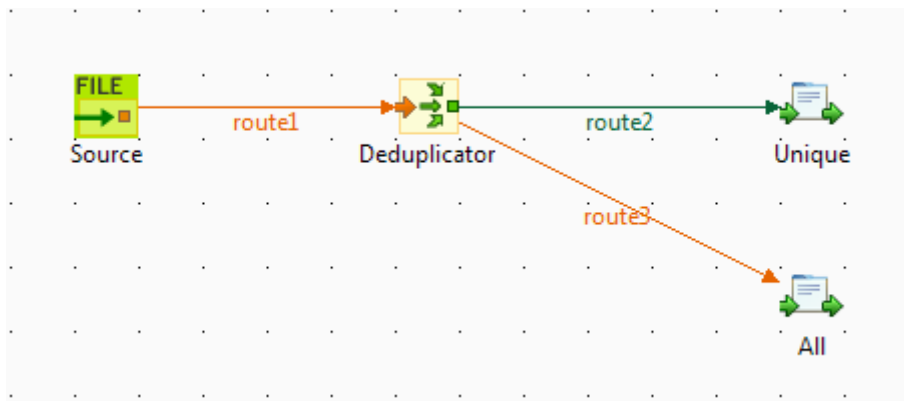

1. From the **Palette**, expand the **Messaging** folder, select the **cFile** component, and drop it onto the design workspace as the message source component.
2. Expand the **Routing** folder, select the **cIdempotentConsumer** component and drop it onto the design workspace as the message deduplicator.
3. Expand the **Processor** folder, drop two **cProcessor** components onto the design workspace, one as the consumer for deduplicated messages and another for all messages.
4. Right-click the **cFile** component, select **Row > Route** from the contextual menu and click the **cIdempotentConsumer** component.
5. Right-click the **cIdempotentConsumer** component, select **Row > idemp** from the contextual menu and click the **cProcessor** component on the top.
6. Connect the **cIdempotentConsumer** component to the other **cProcessor** component using a **Row > Route** connection. This optional connection will retrieve all the messages coming from the source.
7. Label the components to better identify their roles in the Route.

Configuring the components and connections


1. Double-click the **cFile** component, which is labelled *Source*, to display its **Basic settings** view in the **Component** tab.

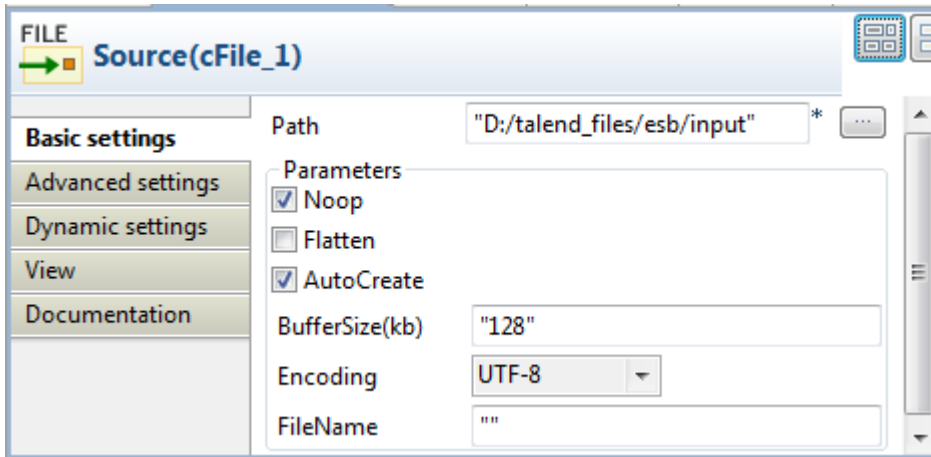

- In the **Path** field, specify the file path to the message source.

From the **Encoding** list, select the encoding type of your source files, and leave all the other parameters as they are.

- Double-click the **cIdempotentConsumer** component, which is labelled *Deduplicator*, to display its **Basic settings** view in the **Component** tab.

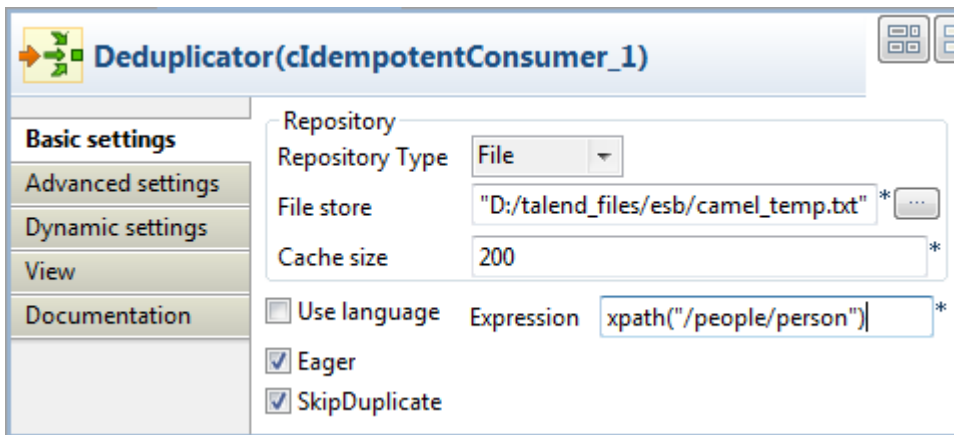


- From the **Repository Type** list, select between **Memory** and **File** to specify where the message identifiers will be stored before the deduplication process. For this scenario, select **File**.

In the **File store** field, specify the location of the file storing message identifiers.

In the **Expression** field, enter an expression to filter the messages. In this scenario, enter the following expression to filter the messages according to the *person* node of the XML files: `xpath("/people/person")`, and leave all the other parameters as they are. Alternatively, you can select the **Use language** check box, select **XPath** from the **Language** list, and enter `/people/person` in the **Predicate** field.

- Double-click the **cProcessor** component labelled *Unique* to display its **Basic settings** view in the **Component** tab.

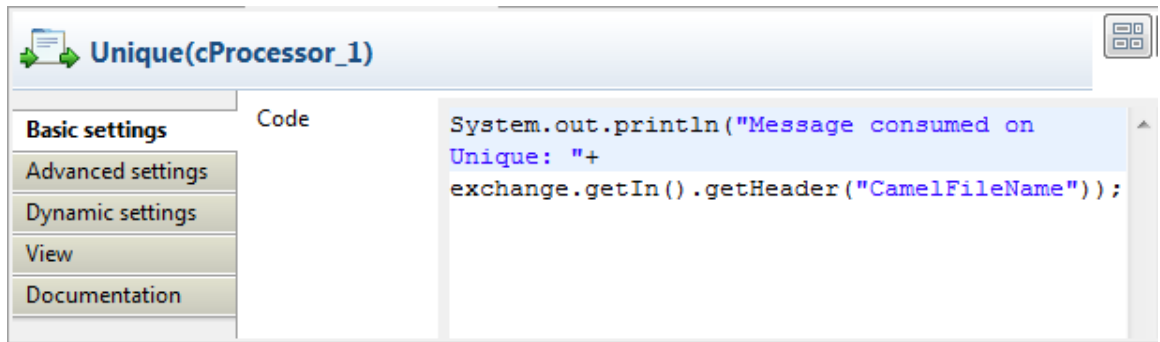

- In the **Code** area, customize the code to display the file name of the message that passes the deduplication:

```
System.out.println("Message consumed on Unique: " +
exchange.getIn().getHeader("CamelFileName"));
```

- Repeat these steps to configure the other **cProcessor** component, which is labelled *All*, to display the file names of all the messages coming from the source:

```
System.out.println("Message consumed on All: " +
exchange.getIn().getHeader("CamelFileName"));
```

- Press **Ctrl+S** to save your Route.

Viewing code and executing the Route


- Click the **Code** tab at the bottom of the design workspace to view the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Source"))
                .routeId("Source")
                .idempotentConsumer(
                    xpath("/people/person"),
                    org.apache.camel.processor.idempotent.FileIdempotentRepository
                        .fileIdempotentRepository(
                            new java.io.File(
                                "D:/talend_files/esb/camel_temp.txt"),
                            200)).eager(true)
                .skipDuplicate(true)
                .id("cIdempotentConsumer_1").process(
                    new org.apache.camel.Processor() {
```

In this partially shown piece of code, messages from the `Source` are filtered according to the expression `xpath("/people/person")` and deduplicated by `cIdempotentConsumer_1`.

- Click the **Run** view to display it and click the **Run** button to launch the execution of your Route. You can also press **F6** to execute it.

RESULT: When several files have the same content, only the first one is routed to the receiving endpoint.

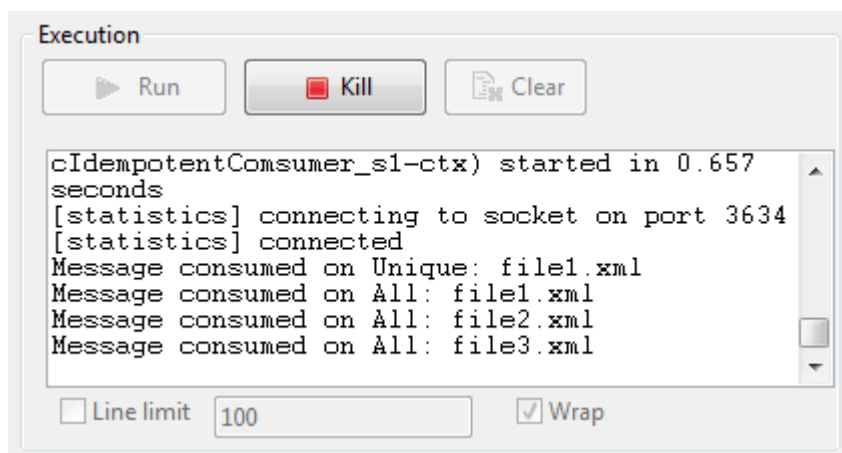

cLoadBalancer



cLoadBalancer properties


Component Family	Routing	
Function	cLoadBalancer allows you to distribute messages across multiple endpoints using different load balancing strategies.	
Purpose	cLoadBalancer allows you to distribute messages among several endpoints using a variety of load balancing strategies.	
Basic settings	<i>Strategy</i>	Select between Random , Round Robin , Sticky , Topic , Failover , and Custom . Each method is described below.
<i>Random</i>	The receiving endpoint is chosen randomly at each exchange.	
<i>Round Robin</i>	Messages are distributed according to the round robin method which distributes the load evenly.	
<i>Sticky</i>	<i>Language</i>	Select the language of the expression to use in the Expression field to distribute the messages.
	<i>Expression</i>	Type in the expression that will be used to calculate a correlation key that will determine the endpoint to choose.
<i>Topic</i>	Select this option to send all the messages to all the endpoints.	
<i>Failover</i>	<i>Basic mode</i>	By default, the failover load balancing always sends the messages to the first endpoint. If the first endpoint fails, the messages are sent to subsequent endpoints.
	<i>Specify exceptions</i>	Specify the exceptions to which the failover should react to in the Exception table.
	<i>Use with Round robin</i>	Select this option to use failover with advanced options. From the Maximum failover attempt list, select the number of attempt to be proceed before giving up the transfer: - Attempt forever : always attempts to transfer the messages and always try to failover. - Never failover : gives up immediately the transfer of messages and never try to failover. - A number of attempts : attempts <i>n</i> number of time to transfer messages, specify that number in the Number of attempts field. Inherit error handler : Select <i>true</i> if you want Camel error handler to be used. If you select <i>false</i> , the load balancer will immediately failover when an exception is thrown. Use Round robin : Select <i>true</i> if you want to combine failover with round robin. Failover load balancing with round robin mode distributes the load evenly between the services, and it provides automatic failover.
<i>Custom</i>	<i>Load balancer</i>	Type in the name of your custom load balancer.
Usage	cLoadBalancer is used as a middle component in a Route.	
Connections	<i>Load Balance</i>	Select this link to route messages to the next endpoint according to the selected load-balancing strategy.
	<i>Route</i>	Select this link to route all the messages from the sender to the next endpoint.
Limitation	n/a	

Scenario: Distributing messages to receiver endpoints based on round robin

In this scenario, a **cLoadBalancer** component is used to distribute four messages evenly to two receiving endpoints in accordance with the round robin load balancing method.

Dropping and linking the components


This scenario requires one **cFile** component as the message sender, one **cLoadBalancer** component to distribute the messages to two different receivers in a load balancing manner, two **cJavaDSLProcessor** components to define the URIs of the receivers, two **cMessagingEndpoint** components to retrieve the messages routed to the two receivers, and two **cProcessor** components to display the effect of round robin load balancing.

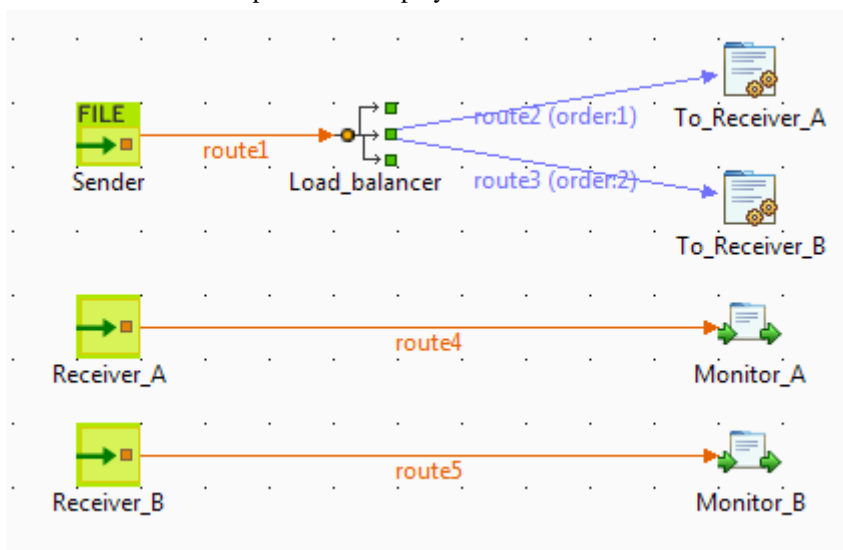


1. From the **Messaging** folder of the **Palette**, drop one **cFile** component and two **cMessagingEndpoint** components onto the workspace, and label them according to their roles in the Route: *Sender*, *Receiver_A*, and *Receiver_B* respectively.
2. From the **Routing** folder, drop a **cLoadBalancer** component onto the design workspace, and label it *Load_balancer*.
3. From the **Processor** folder, drop two **cJavaDSLProcessor** components and two **cProcessor** components onto the design workspace, and label them according to their roles in the Route: *To_Receiver_A*, *To_Receiver_B*, *Monitor_A*, and *Monitor_B* respectively.
4. Link the **cFile** component to the **cLoadBalancer** component using a **Row > Route** connection.
5. Link **cLoadBalancer** to each of the two **cJavaDSLProcessor** components using a **Row > Load Balance** connection.
6. Link each of the two **cMessagingEndpoint** components to the corresponding **cProcessor** component using a **Row > Route** connection.

Configuring the components and connections


1. Double-click the **cFile** component to open its **Basic Settings** view in the **Component** tab.

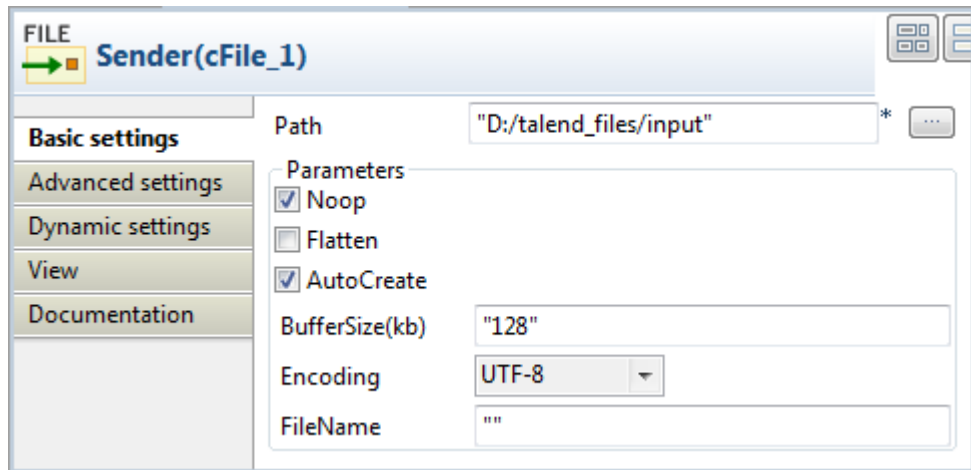

2. In the **Path** field, specify the file path to message source.
3. From the **Encoding** list, select the encoding type of your message files. Leave the other parameters as they are.
4. Double-click the **cLoadBalancer** component to open its **Basic Settings** view in the **Component** tab, and select the load balancing method you want to use from the **Strategy** list. In this scenario, we use the default **Round robin** method.

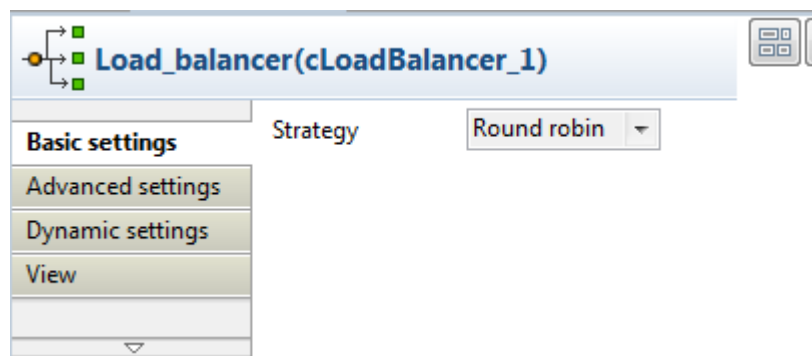


5. Double-click the **cJavaDSLProcessor** component labeled *To_Receiver_A* to open its **Basic Settings** view in the **Component** tab, and enter URI of the first receiver between the double quotation marks in the **Code** area, `direct:a` in this example.

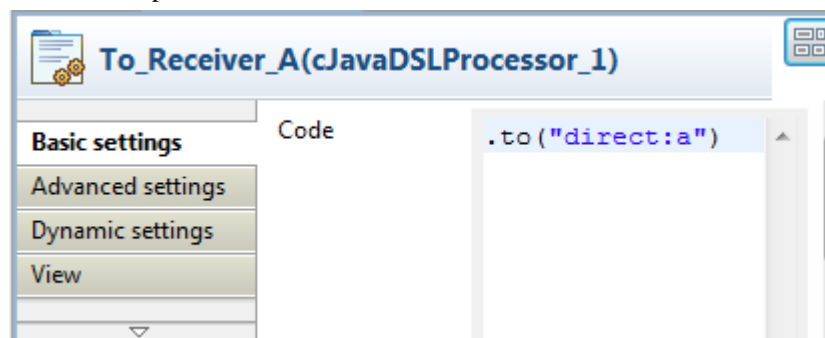

Repeat this step to define the URI of the other receiver, `direct:b`, in the **cJavaDSLProcessor** component labeled *To_Receiver_B*.

6. Double-click the **cMessagingEndpoint** component labeled *Receiver_A* to open its **Basic Settings** view in the **Component** tab, and enter URI of the first receiver between the double quotation marks in the **URI** field, `direct:a` in this example.

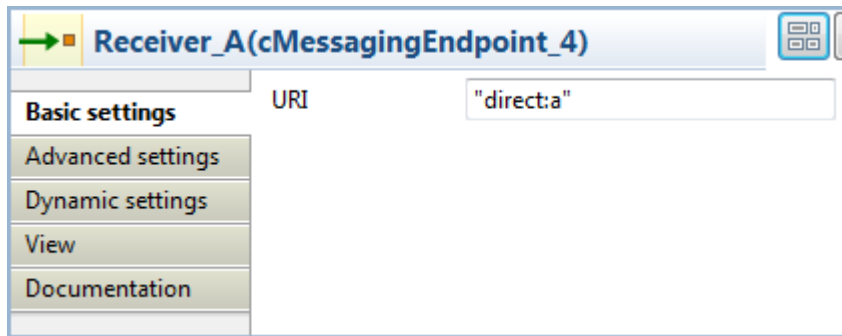

Repeat this step to define the URI of the other receiver, `direct:b`, in the `cMessagingEndpoint` component labeled `Receiver_B`.

7. Double-click the `cProcessor` component labeled `Monitor_A` to open its **Basic Settings** view in the **Component** tab, and customize the code in the **Code** area to display the file names of the messages routed to `Receiver_A` on the console:

```
System.out.println("Message on Receiver_A: "+
exchange.getIn().getHeader("CamelFileName"));
```

Repeat this step to customize the code in the `cProcessor` component labeled `Monitor_B` to display the file names of the messages routed to `Receiver_B` on the console.

8. Press **Ctrl+S** to save your Route.

Viewing the code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to check the generated code:

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Sender")).routeId("Sender")
                .loadBalance().roundRobin().id(
                    "cLoadBalancer_1")


                .to("direct:a").id("cJavaDSLProcessor_1")

                .to("direct:b").id("cJavaDSLProcessor_2");
        }
    };
}
```

As shown above, while messages are routed from the source endpoint `.to` to the destination endpoints, routing load balancing is implemented according to the `.roundRobin()` method by `cLoadBalancer_1`.

2. Press **F6** to run your Route.

RESULT: Of the four messages from the sender, two are routed to `Receiver_A` and two are routed to `Receiver_B` in a round robin manner.

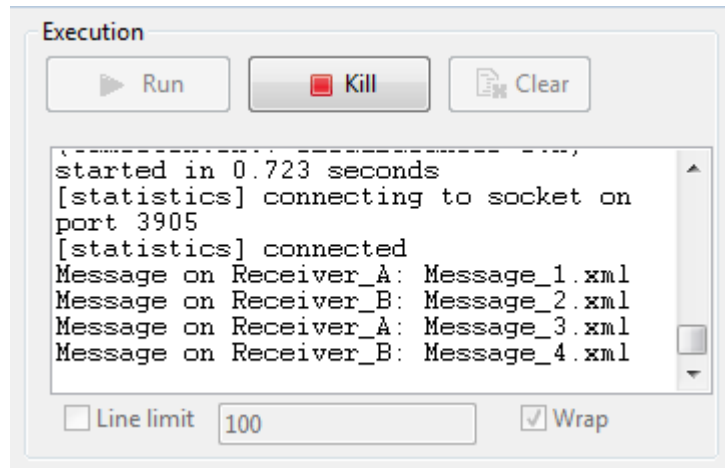

cMessageFilter



cMessageFilter properties

Component Family	Routing	
Function	cMessageFilter filters the content of messages according to the specified criterion and routes the filtered messages to the specified output channel. All messages that do not match the criteria will be dropped. For more information on the Camel Message Filter EIP: http://camel.apache.org/message-filter.html .	
Purpose	Use cMessageFilter to eliminate unwanted messages from a channel according to the defined criterion.	
Basic settings	<i>Language</i>	Select the language of the expression you use to filter your messages from Constant, EL, Groovy, Header, JavaScript, JoSQL, XPath, MVEL, None, OGNL, PHP, Property, Python, Ruby, Simple, SpEL, SQL, XPath, and XQuery .
	<i>Expression</i>	Type in the expression to use to filter the messages.
Usage	cMessageFilter is used as a middle component in a Route.	
Connections	<i>Filter</i>	Select this link to route the filtered messages to the next endpoint.
	<i>Route</i>	Select this link to route all the messages from the sender to the next endpoint.
Limitation	n/a	

Scenario: Filtering messages according to a criterion


In this use case, we filter XML messages that are sent from the sending endpoint according to a defined criterion: only the XML files in which the value of the *city* node is *Paris* are sent to a folder named *Paris_only*.

Of the four XML files used in this scenario, *Message_1.xml* and *Message_4.xml* contain the city name of *Paris*. The following is an example:

```
<person>
  <firstName>Pierre</firstName>
  <lastName>Dupont</lastName>
  <city>Paris</city>
</person>
```

Dropping and linking the components


This scenario requires one **cMessageFilter** component to filter the messages from the sender, one **cFile** component as the message sender, one **cFile** component to receiver the messages containing *Paris*, one **cFile** component to receiver all the messages from the sender, and two **cProcessor** components to monitor the messages routed to the two receivers.

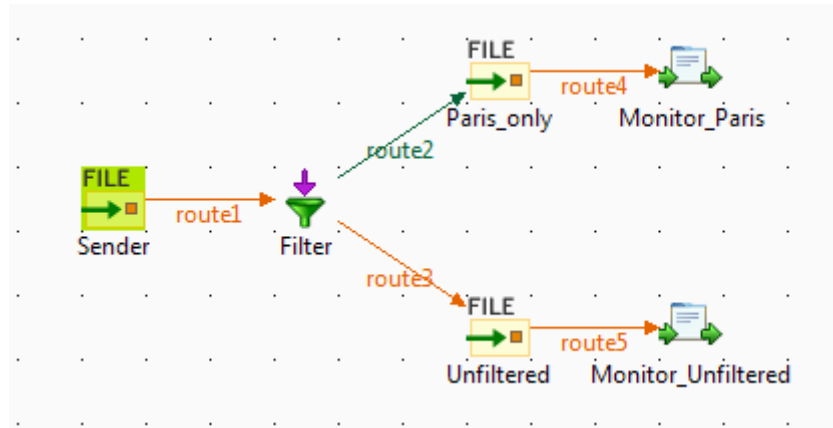

1. From the **Messaging** folder of the **Palette**, drop three **cFile** components onto the design workspace, and label them *Sender*, *Paris_only*, and *Unfiltered* respectively to better identify their roles.
2. From the **Routing** folder, drop a **cMessageFilter** component onto the design workspace, and label it *Filter*.
3. From the **Processor** folder, drop two **cProcessor** components onto the design workspace, and label them *Monitor_Paris* and *Monitor_Unfiltered* respectively.
4. Right-click the **cFile** component labeled *Sender*, select **Row > Route** from the contextual menu and click the **cMessageFilter** component.
5. Right-click the **cMessageFilter** component, select **Row > Filter** from the contextual menu and click the **cFile** component labeled *Paris_only*. This endpoint will retrieve the messages that meet the defined criterion.
6. Right-click the **cMessageFilter** component, select **Row > Route** from the contextual menu and click the **cFile** component labeled *Unfiltered*. This endpoint will collect all the messages, including those meeting the filter criterion. This connection is optional.
7. Right-click the **cFile** component labeled *Paris_only*, select **Row > Route** from the contextual menu and click the **cProcessor** component labeled *Monitor_Paris*. Repeat this step to connect the **cFile** component labeled *Unfiltered* to the **cProcessor** component labeled *Monitor_Unfiltered*.


Configuring the components and connections

1. Double-click the **cFile** component labeled *Sender* to open its **Basic settings** view in the **Component** tab.

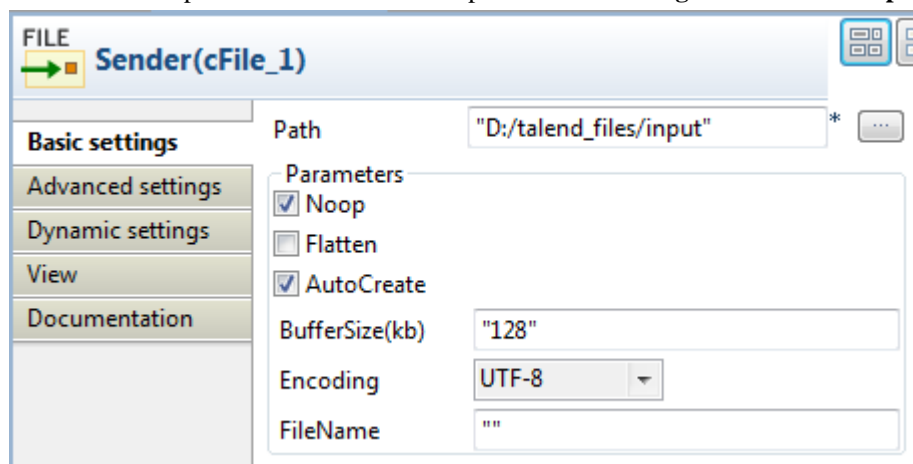

2. In the **Path** field, specify the file path to message source.
3. From the **Encoding** list, select the encoding type of your message files. Leave the other parameters as they are.


- Double-click the **cMessageFilter** component to open its **Basic settings** view in the **Component** tab.

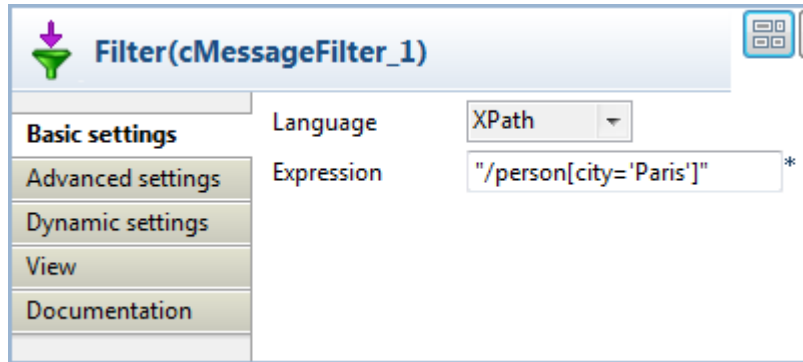

- Select the language of the expression you want to use to filter your messages, and enter an expression to define a criterion according to which you want to filter your messages.

In this scenario, we want to sort out the XML files containing a city node with the value of Paris, so we select **XPath** from the **Language** list, and fill the in the **Expression** field with this expression: `"/person[city='Paris']"`.

- Double-click the **cFile** component labeled *Paris_only* to open its **Basic settings** view in the **Component** view, and specify the path for the messages meeting the filter criterion in the **Path** field.

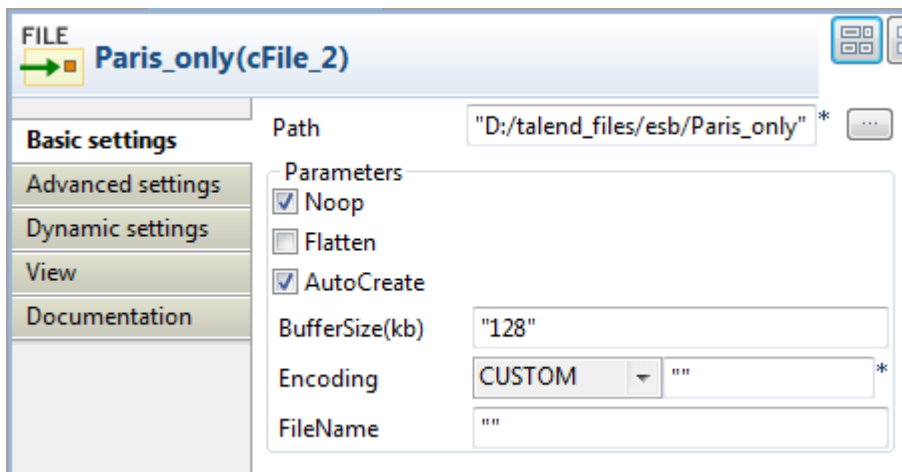

Repeat this step to define the path for all the messages from the sender in the **cFile** component labeled *Unfiltered*.

- Double-click the **cProcessor** component labeled *Monitor_Paris* to open its **Basic settings** view in the **Component** view, and customize the code in the **Code** area to display the file names of the messages that meet the filter criterion on the console:

```
System.out.println("Message sent to folder Paris_only: "+
exchange.getIn().getHeader("CamelFileName"));
```

Repeat this step to customize the code in the **cProcessor** component labeled *Monitor_Unfiltered* to display the file names of all the messages from the sender.

- Press **Ctrl+S** to save your Route.

Viewing the code and executing the Route

- To have a look at the generated code, click the **Code** tab at the bottom of the design workspace.


```

public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Sender"))
                .routeId("Sender")
                .filter()
                .xpath("/person[city='Paris']")
                .id("cMessageFilter_1")
                .to(uriMap.get("Paris_only"))
                .id("cFile_2")
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        System.out
                            .println("Message sent to folder Paris_only: "
                                + exchange
                                    .getIn()
                                    .getHeader(
                                        "CamelFileName"));
                    }
                })
                .id("cProcessor_1").end().to(
                    uriMap.get("Unfiltered")).id("cFile_3")
        }
    };
}


```

As shown in this piece of code, messages from the sender are filtered by `cMessageFilter_1` according to `.xpath("/person[city='Paris']")` and the messages matching the filter are sent to the endpoint `Paris_only`, while all messages are sent to the endpoint `Unfiltered`.

2. Click the **Run** view to display it and click the **Run** button to launch the execution of your Route.

You can also press **F6** to execute it.

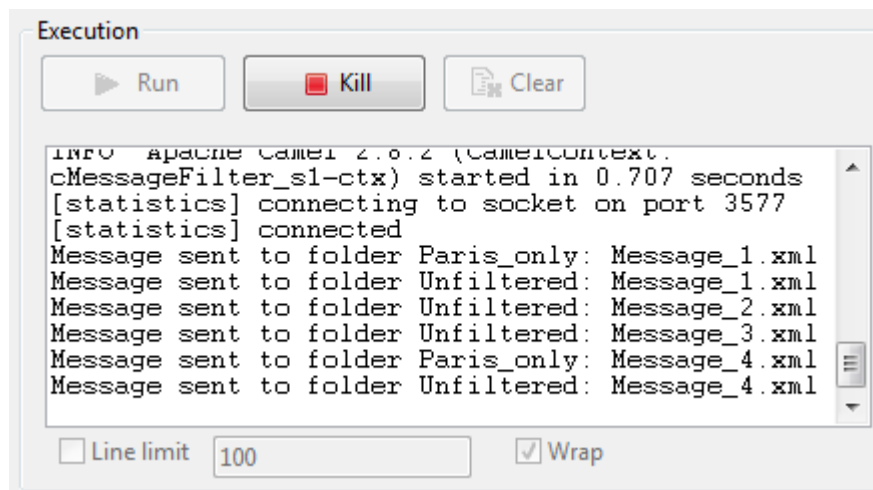

RESULT: The messages are filtered according to the defined criterion and the messages containing *"Paris"* are redirected to the *Paris_only* folder, all the messages, including those containing *"Paris"*, are sent to the *Unfiltered* folder.



cMessageRouter




cMessageRouter properties

Component Family	Routing	
Function	cMessageRouter routes messages in different channels according to specified conditions.	
Purpose	cMessageRouter creates different channels for each filtered message types so that messages can later on be treated more accurately in each new channel.	
Usage	cMessageRouter is used as a middle component in a Route. It can only have one input channel but multiple output channels. Messages can be outputted through either a When , Otherwise or Route types of connection.	
Connections	<i>Trigger / When</i>	<p>Select the When link and click the Component view.</p> <p>In the Type list, select the type of language you will use to declare your condition.</p> <p>In the Condition field, type in the condition that will be used to filter the messages.</p> <p>All the messages that do not match this condition are retrieved with the Otherwise link to a different channel or dropped if an Otherwise link does not present.</p> <p> There can be more than one When link in a Route.</p>
	<i>Trigger / Otherwise</i>	<p>This link automatically retrieves the messages that do not match the When conditions.</p> <p> There can be only one Otherwise link, which is optional, in a Route.</p>
Limitation	It is recommended not to put any message handling after the When or the Otherwise link. Always use a Mock/Direct endpoint to replace them and make a new Route to handle the messages.	

Scenario: Routing messages according to a criterion

In this use case, we route XML messages that are sent from the sending endpoint according to a defined criterion: those XML files in which the value of the *city* node is *Paris* are sent to a folder named *Paris_only*, and other messages are sent to a folder named *Other_cities*.

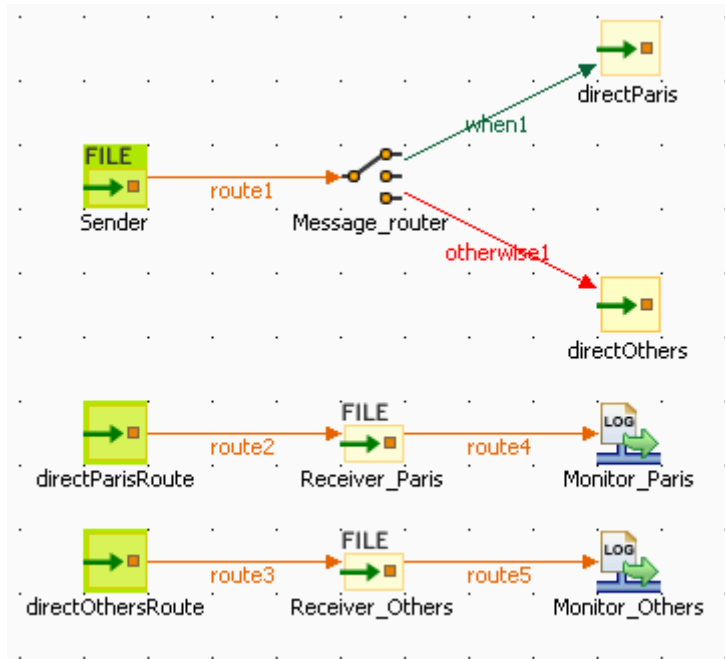

Of the four XML files used in this scenario, *Message_1.xml* and *Message_4.xml* contain the city name of *Paris*. The following is an example:

```
<person>
  <firstName>Pierre</firstName>
  <lastName>Dupont</lastName>
  <city>Paris</city>
</person>
```


Dropping and linking the components

1. From the **Messaging** folder of the **Palette**, drop three **cFile** and four **cMessagingEndpoint** components onto the design workspace, and label them *Sender*, *Receiver_Paris*, and *Receiver_Others*, *directParis*, *directOthers*, *directParisRoute*, and *directOthersRoute* respectively to better identify their roles.
2. From the **Routing** folder, drop a **cMessageRouter** component onto the design workspace, and label it *Message_router*.
3. From the **Miscellaneous** folder, drop two **cLog** components onto the design workspace, and label them *Monitor_Paris* and *Monitor_Others* respectively.
4. Right-click the **cFile** component labeled *Sender*, select **Row > Route** from the contextual menu and click the **cMessageRouter** component.
5. Right-click the **cMessageRouter** component, select **Trigger > When** from the contextual menu and click the **cMessagingEndpoint** component labeled *directParis*. This endpoint will retrieve the messages that meet the defined criterion.
6. Right-click the **cMessageRouter** component, select **Trigger > Otherwise** from the contextual menu and click the **cMessagingEndpoint** component labeled *directOthers*. This endpoint will collect all the messages that do not meet the filter criterion.
7. Right-click the **cMessagingEndpoint** component labeled *directParis*, select **Row > Route** from the contextual menu and click the **cFile** component labeled *Receiver_Paris*. Repeat this operation to link the component labeled *Receiver_Paris* to *Monitor_Paris*, *directOthersRoute* to *Receiver_Others*, and *Receiver_Others* to *Monitor_Others* respectively using the **Row > Route** connection.


Configuring the components and connections

The **cMessageRouter** component does not have any property as it filters and routes the messages from one endpoint to others based on the conditions set in its **When** connection(s).


1. Double-click the **cFile** component labeled *Sender* to open its **Basic settings** view in the **Component** tab.

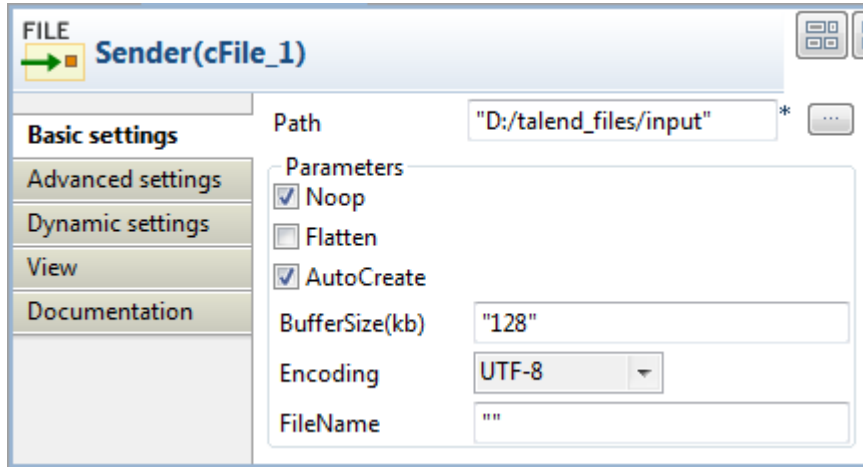

2. In the **Path** field, specify the file path to message source.
From the **Encoding** list, select the encoding type of your message files. Leave the other parameters as they are.
3. In the design workspace, click the **When** connection you created and click the **Component** view to define a filter against which messages will be routed.

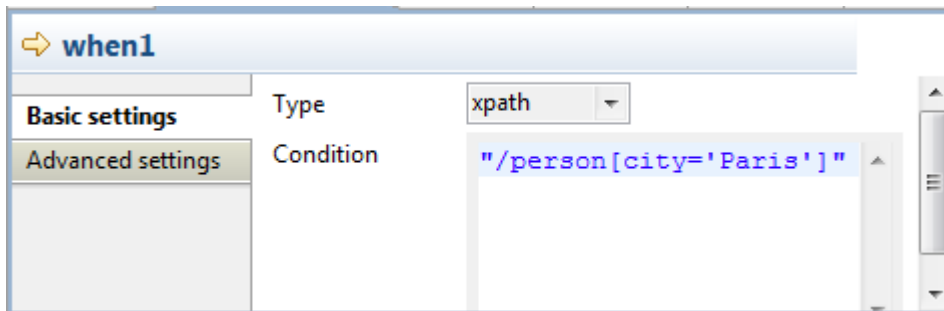


4. In the **Type** list, select **xpath** because the format of the messages used is XML.
In the **Condition** field, type in `"/person[city='Paris']"` to retrieve only those messages in which the value of the *city* node is *Paris*.
5. Double-click the **cMessagingEndpoint** component labeled *directParis* to open its **Basic settings** view in the **Component** tab.

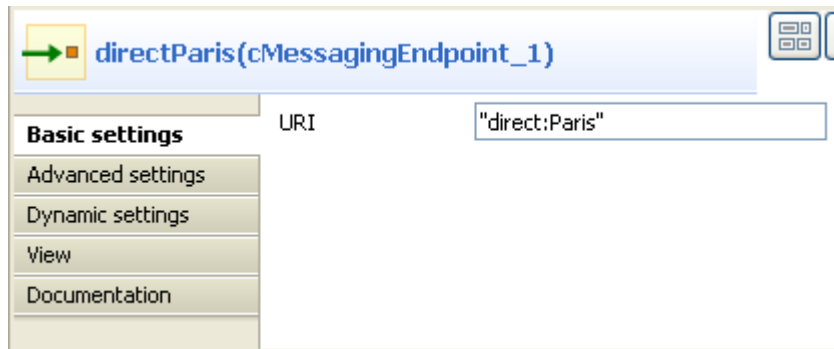


6. In the **URI** field, enter the endpoint URI, for example, `"direct:Paris"` to receive the filtered message.

7. Repeat these steps to set the endpoint URI of the **cMessagingEndpoint** components labeled *directOthers* as "*direct:Others*". Set the endpoint URIs of the **cMessagingEndpoint** components labeled *directParisRoute* and *directOthersRoute* as "*direct:Paris*" and "*direct:Others*" respectively.
8. Double-click the **cFile** component labeled *Receiver_Paris* to open its **Basic settings** view in the **Component** tab, and specify the path for the messages meeting the filter criterion in the **Path** field.

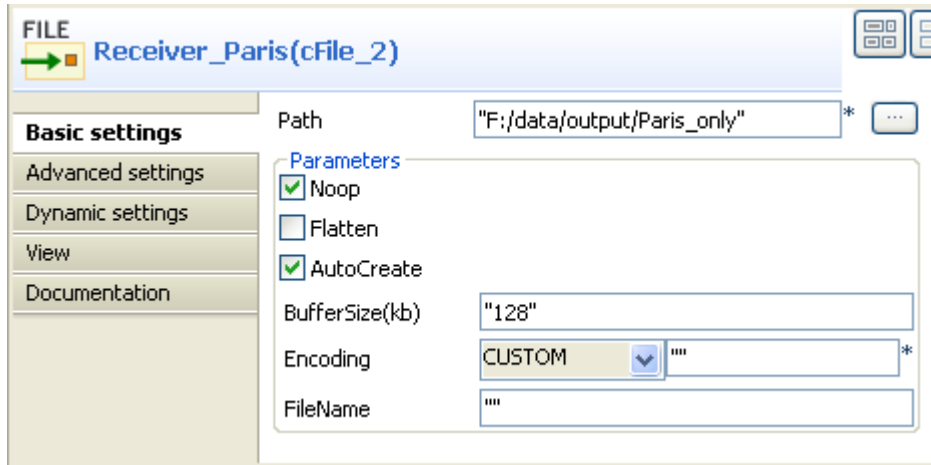

Repeat this step to define the path for all the other messages from the sender in the **cFile** component labeled *Receiver_Others*.

9. Double-click the **cLog** component labeled *Monitor_Paris* to open its **Basic settings** view in the **Component** tab.

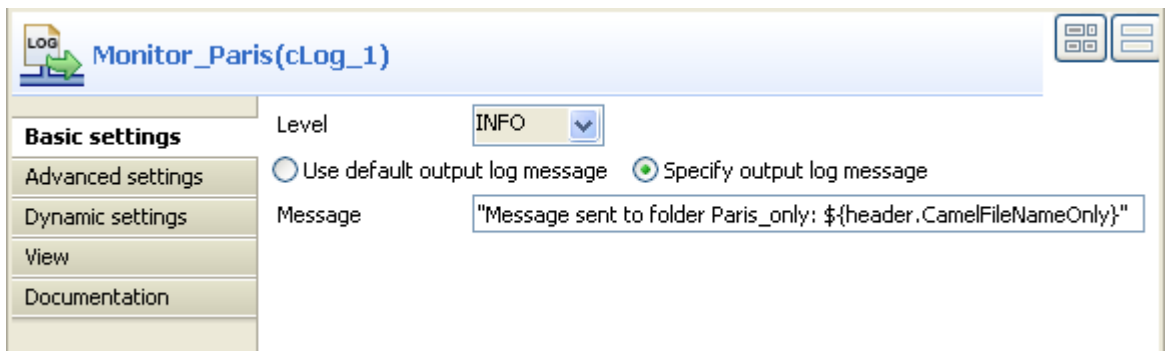

10. Select **INFO** in the **Level** list. Select the **Specify output log message** option and enter the following code in the **Message** field to display the filename of the message sent to the specified directory.

```
Message sent to folder Paris_only: ${header.CamelFileNameOnly}
```

Repeat this step to customize the message in the **cLog** component labeled *Monitor_Others* to display the filename of the message sent to the specified directory.

11. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```

public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Sender")).routeId("Sender").choice()
                .id("cMessageRouter_1").when().xpath(
                    "/person[city='Paris']").to(
                        uriMap.get("directParis").id(
                            "cMessagingEndpoint_1").otherwise().to(
                                uriMap.get("directOthers").id(
                                    "cMessagingEndpoint_2");
            from(uriMap.get("directParisRoute"))
                .routeId("directParisRoute")
                .to(uriMap.get("Receiver_Paris"))
                .id("cFile_2")
                .log(org.apache.camel.LoggingLevel.INFO,
                    "Monitor_Paris",
                    "Message sent to folder Paris_only: ${header.CamelFileNameOnly}")

                .id("cLog_1");
            from(uriMap.get("directOthersRoute"))
                .routeId("directOthersRoute")
                .to(uriMap.get("Receiver_Others"))
                .id("cFile_3")
                .log(org.apache.camel.LoggingLevel.INFO,
                    "Monitor_Others",
                    "Message sent to folder Other_cities: ${header.CamelFileNameOnly}")


                .id("cLog_2");
        }
    };
}

```

As shown in the code, the messages are routed according to conditions initialized with the `.choice()` piece of code. The filter you defined is initialized with the `.when()` piece of code, and the non filtered messages are routed through the `.otherwise()` piece of code.

2. Click the **Run** button in the **Run** view or press **F6** to execute your Route.

RESULT: The files containing “*Paris*” are sent to a folder named *Paris_only*, and the other messages are sent in a folder called *Other_cities*.

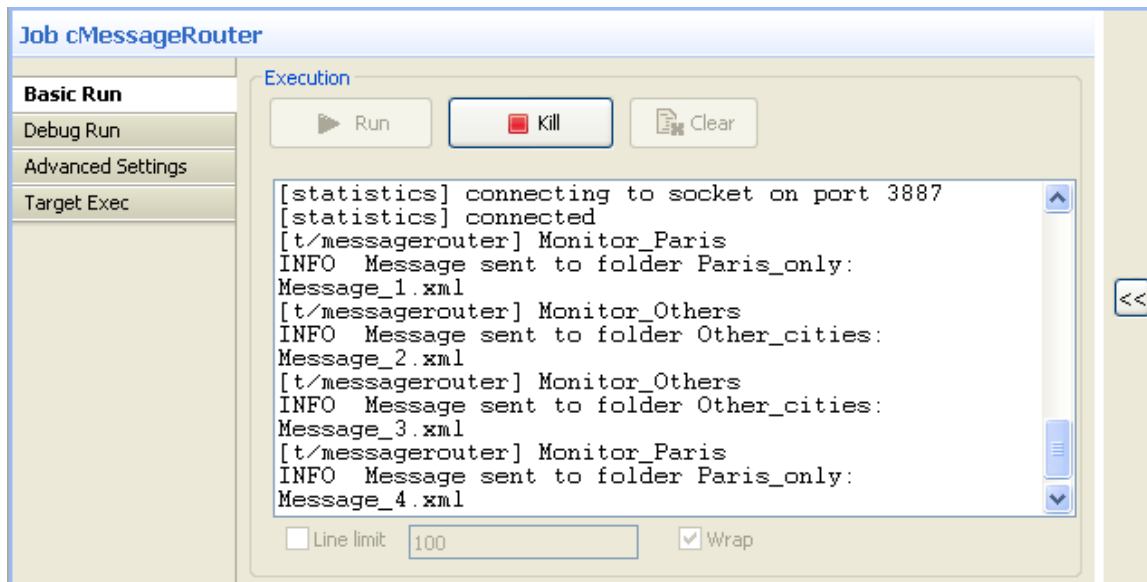

cMulticast




cMulticast properties

Component Family	Routing	
Function	cMulticast routes one or more messages to a number of endpoints at one go.	
Purpose	cMulticast is used to route one or more messages to a number of endpoints at one go and process them in different ways.	
Basic settings	<i>URIS</i>	Add as many lines as needed in the URIs table to define the endpoints to route the message(s) to.
	<i>Use ParallelProcessing</i>	Select this check box to multicast the message(s) to the specified endpoints simultaneously.
	<i>set timeout</i>	Select this check box and set a timeout in the Timeout field, in milliseconds. If cMulticast fails to send and process all the messages within the set timeframe, it breaks out and continues. Note that this check box appears only when the Use ParallelProcessing check box is selected.
	<i>Use Aggregation Strategy</i>	Select this check box to refer to a predefined Java bean as an aggregation strategy for assembling the messages from the message source into a single outgoing message. By default, the last message acts as the outgoing message.
Connections	<i>Route</i>	Select this link to route the message(s) from the sender to the next endpoint.
	<i>EndBlock</i>	Select this link to route the message(s) from the end block of the Route to the next endpoint.
Usage	cMulticast can be used as a middle or end component in a Route.	
Limitation	n/a	

Scenario: Route a message to multiple endpoints and set a new body for each

In this scenario, a cMulticast component is used to route a message to two endpoints. The source message and the message on each endpoint is then set a new body. The cProcessor component is used to monitor the messages.

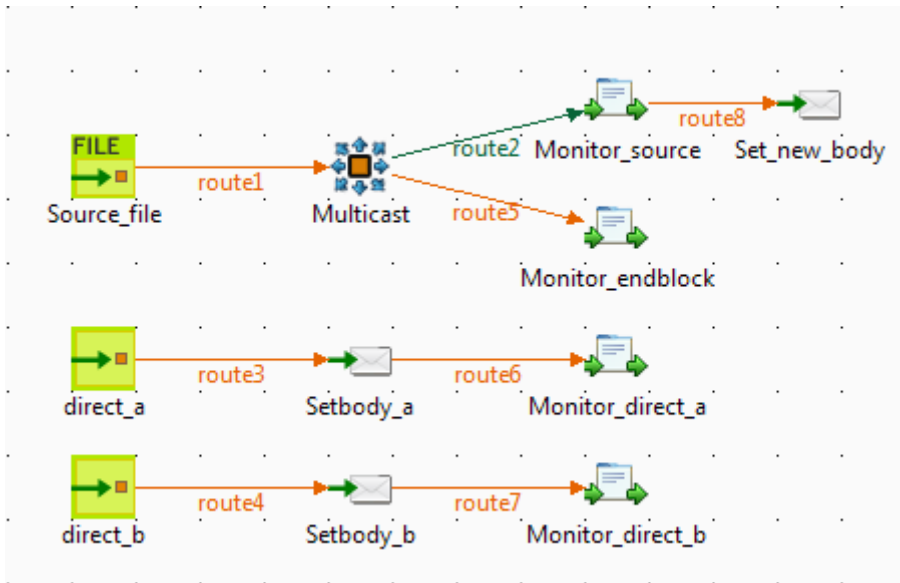


Dropping and linking the components


1. From the **Palette**, expand the **Messaging** folder. Drag and drop a **cFile** and two **cMessagingEndpoint** components onto the design workspace.
2. From the **Routing** folder, drag and drop a **cMulticast** component onto the design workspace.
3. From the **Process** folder, drag and drop four **cProcessor** components onto the design workspace.
4. From the **Transformation** folder, drag and drop three **cSetBody** components onto the design workspace.
5. Label the components as shown above to better identify their roles in the Route.
6. Right-click the **cMulticast** component, select **Row > EndBlock** in the context menu and click the **cProcessor** component labeled **Monitor_endblock**.
7. Right-click the **cFile** component, select **Row > Route** in the context menu and click the **cMulticast** component. Repeat this step to link the rest components in the Route as shown above using the **Row > Route** connection.

Configuring the components


1. Double-click the **cFile** component labeled *Source_file* to open its **Basic settings** view in the **Component** tab.

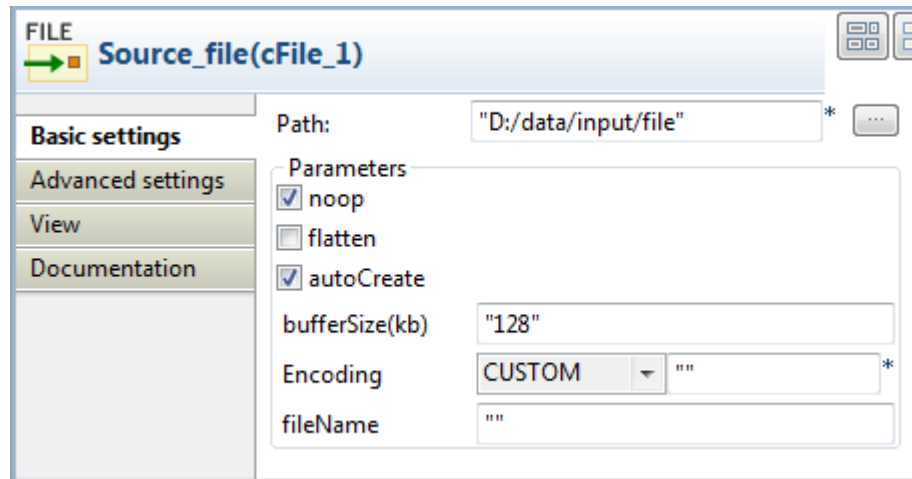

2. In the **Path** field, fill in or browse to the path where the source file *Hello.txt* is located. Keep the default settings for other fields.
3. Double-click the **cMulticast** component labeled *Multicast* to open its **Basic settings** view in the **Component** tab.

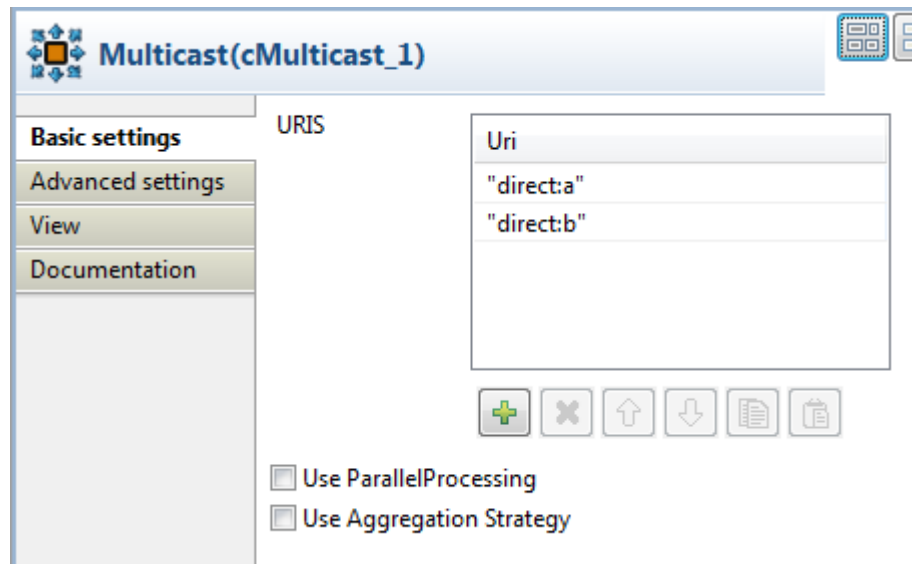


4. In the **URIS** table, click the plus button to add two lines and specify the URIs of the endpoints where the message will be sent, *"direct:a"* and *"direct:b"* in this use case.
5. Double-click the **cMessagingEndpoint** component labeled *direct_a* to open its **Basic settings** view in the **Component** tab.

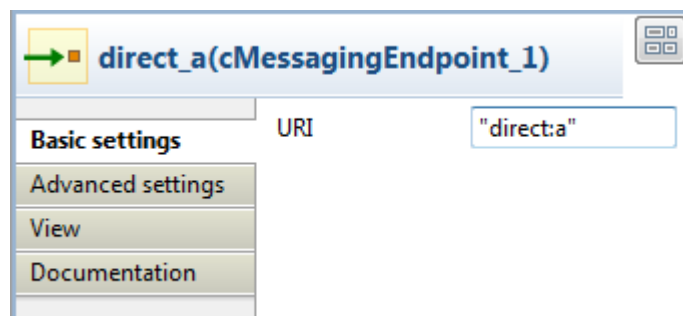

6. In the **URI** field, enter the endpoint URI, *"direct:a"* in this use case.
Repeat this step to set the endpoint URI for *direct_b* as *"direct:b"*.

- Double-click the **cProcessor** component labeled *Monitor_source* to open its **Basic settings** view in the **Component** tab.

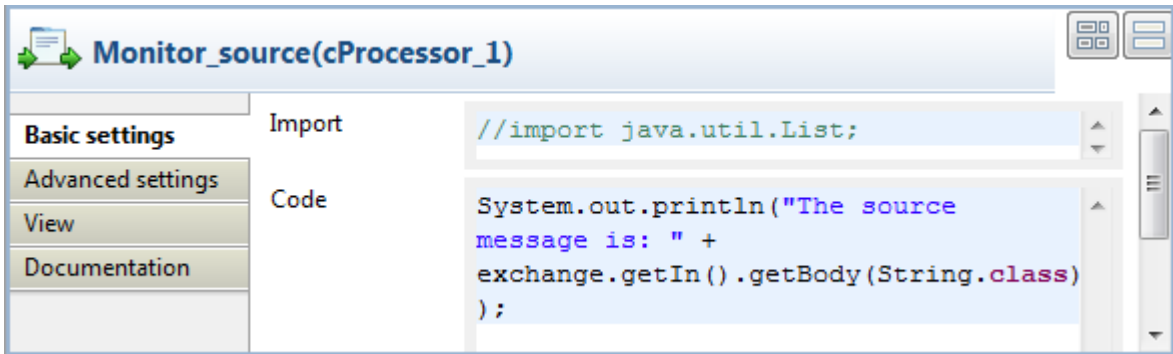

- In the **Code** box, enter the code below to print the source message in the console.

```
System.out.println("The source message is: " +
exchange.getIn().getBody(String.class));
```

Repeat this step to customize the code of **Monitor_endblock**, **Monitor_direct_a**, and **Monitor_direct_b** as shown below to print the message of each endpoint.

Monitor_endblock:

```
System.out.println("The endblock message is: " +
exchange.getIn().getBody(String.class));
```


Monitor_direct_a:

```
System.out.println("direct a just downloaded:
"+exchange.getIn().getBody(String.class));
```

Monitor_direct_b:

```
System.out.println("direct b just downloaded:
"+exchange.getIn().getBody(String.class));
```

- Double-click the **cSetBody** component labeled *Set_new_body* to open its **Basic settings** view in the **Component** tab.

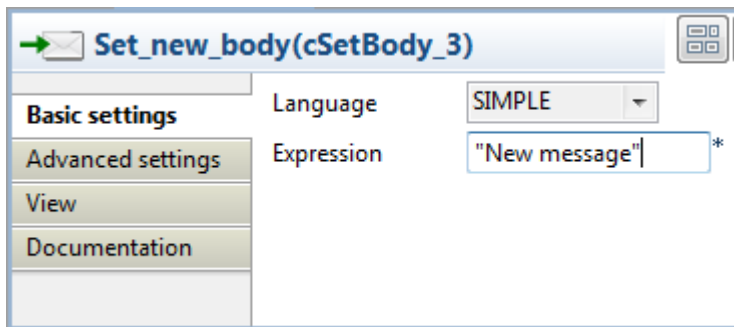

- Select **SIMPLE** in the **Language** list.

In the **Expression** field, enter *"New message"* as the new message body.

Repeat this step to set the message body for *direct:a* and *direct:b* as *"message A"* and *"message B"* respectively.

- Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to check the generated code.


```

public RouteBuilder route() {
    return new RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Source_file_cFile_1"))
                .routeId("Source_file_cFile_1")
                .multicast()
                .to("direct:a", "direct:b")
                .id("cMulticast_1")
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        System.out.println("The source message is: "
                            + exchange.getIn()
                                .getBody(String.class));
                    }
                })
                .id("cProcessor_1").setBody().simple("New message")
                .id("cSetBody_3").end()
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        System.out.println("The endblock message is: "
                            + exchange.getIn()
                                .getBody(String.class));
                    }
                })
                .id("cProcessor_2");
            from(uriMap.get("direct_a_cMessagingEndpoint_1"))
                .routeId("direct_a_cMessagingEndpoint_1").setBody()
                .simple("message A").id("cSetBody_1")
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        System.out.println("direct a just downloaded: "
                            + exchange.getIn()
                                .getBody(String.class));
                    }
                })
                .id("cProcessor_3");
        }
    };
}

```

In the partially shown code, the source message is routed from "Source_file_cFile_1" to direct:a and direct:b via "cMulticast_1". The message is then processed by "cProcessor_1" and given the message body "New message" by "cSetBody_3". The .end block of the route is processed by "cProcessor_2". The message from "direct_a_cMessagingEndpoint_1" is set the message body "message A" by "cSetBody_1" and processed by "cProcessor_3". The message from direct:b is processed similarly.

2. Click the **Run** view to display it and click the **Run** button to launch the execution of your Route. You can also press **F6** to execute it.

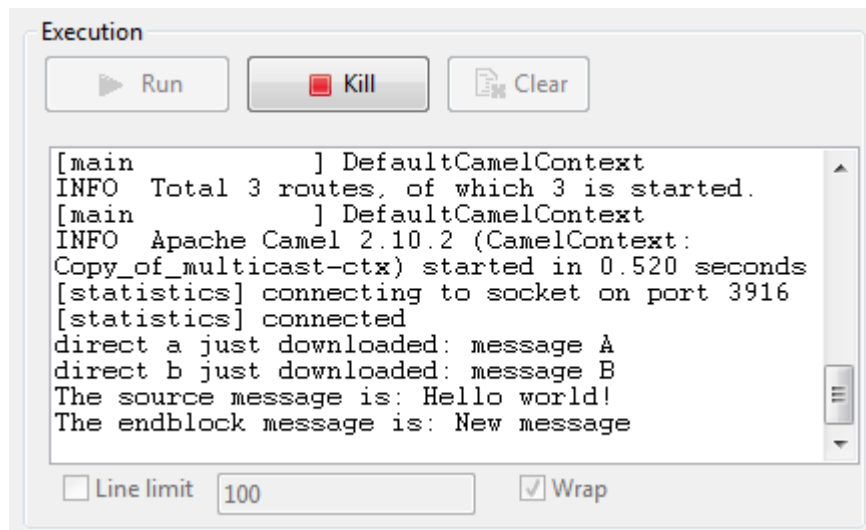

RESULT: The source file message is *Hello world!*. The message routed to *direct:a* and *direct:b* is set the message body *message A* and *message B* respectively. The end block message of this Route is *New message* that is set by the component labeled *Set_new_body*.

cPipesAndFilters




cPipesAndFilters properties

Component Family	Routing	
Function	The cPipesAndFilters component divides message processing into a sequence of independent endpoint instances, which can then be chained together.	
Purpose	This component allows you to split message routing into a series of independent processing stages.	
Basic settings	<i>URI list</i>	Click the plus button to add new lines for URIs that identify endpoints.
Usage	cPipesAndFilters is usually used in the middle of a Route.	
Limitation	n/a	

Scenario: Using cPipesAndFilters to process the task in sequence

In this scenario, a **cPipesAndFilters** component is used so that messages sent from the sender endpoint undergo stage A and stage B. Upon completion of both stages, the messages are routed to a file system, which is the receiver endpoint for the messages.

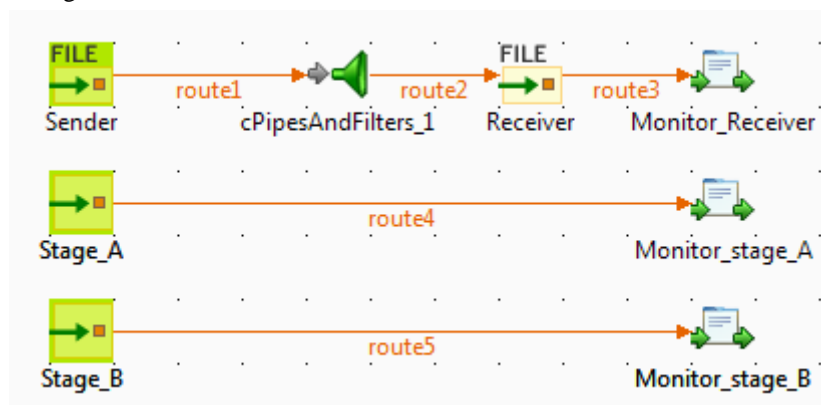

Dropping and linking the components


1. From the **Messaging** folder of the **Palette**, drop two **cFile** components onto the design workspace, one as the message sender and the other as the message receiver, and label them *Sender* and *Receiver* respectively to better identify their roles in the Route.
2. From the **Routing** folder, drop one **cPipesAndFilters** component onto the design workspace, between the two **cFile** components.
3. From the **Messaging** folder, drop two **cMessagingEndpoint** components onto the design workspace, one as the endpoint of stage A and the other as the endpoint of stage B, and label them *Stage_A* and *Stage_B* respectively to better identify their roles in the Route.

- From the **Processor** folder, drop three **cProcessor** components onto the design workspace to monitor messages received on the receiver, stage A and stage B endpoints respectively, and label them *Monitor_Receiver*, *Monitor_stage_A*, and *Monitor_stage_B* respectively to better identify their roles in the Route.
- Right-click the **cFile** component labeled *Sender*, select **Row > Route** from the contextual menu, and click the **cPipesAndFilters** component.


Repeat this step to set up the rest **Row > Route** connections, as shown above.

Configuring the components


- Double-click the **cFile** component labeled *Sender* to open its **Basic settings** view in the **Component** tab.

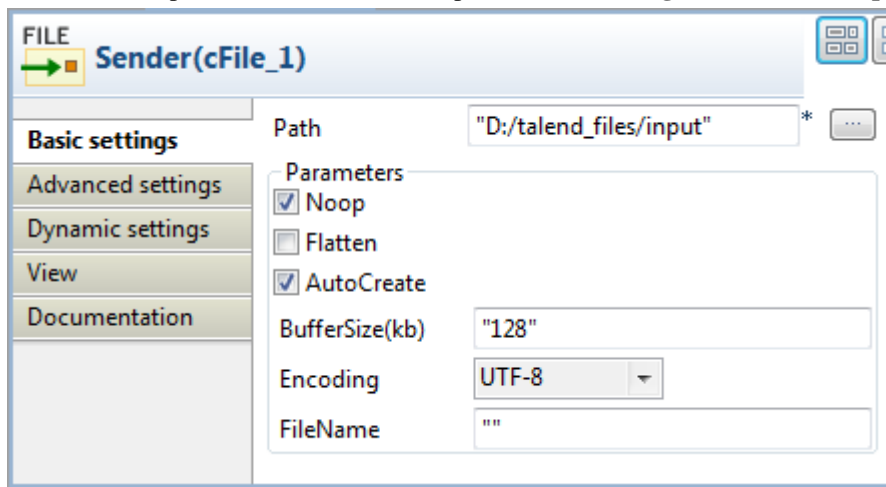

- In the **Path** field, fill in or browse to the path to the folder that holds the source files.
- From the **Encoding** list, select the encoding type of your source files. Leave the other parameters as they are.
- Repeat these steps to define the path to the output files and the output encoding type in the **Basic settings** view of the **cFile** component labeled *Receiver*.
- Double-click the **cPipesAndFilters** component to open its **Basic settings** view in the **Component** tab.

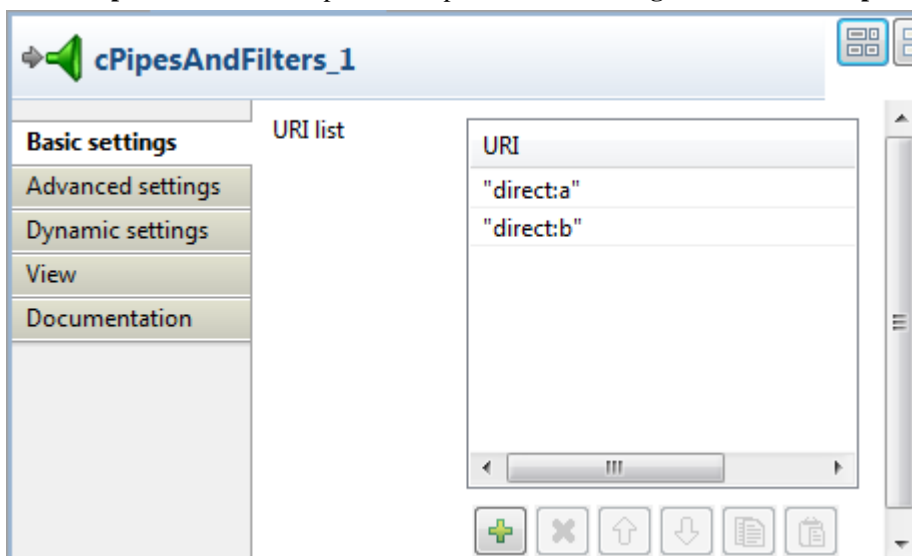

- Click the plus button to add two lines to the **URI list** table, and fill the first line with "direct:a" and the second line with "direct:b" to define the URIs of stage A and stage B that the messages will undergo.
- Double-click the **cMessagingEndpoint** component labeled *Stage_A* to configure the component in its **Basic settings** view and define the URI of stage A.

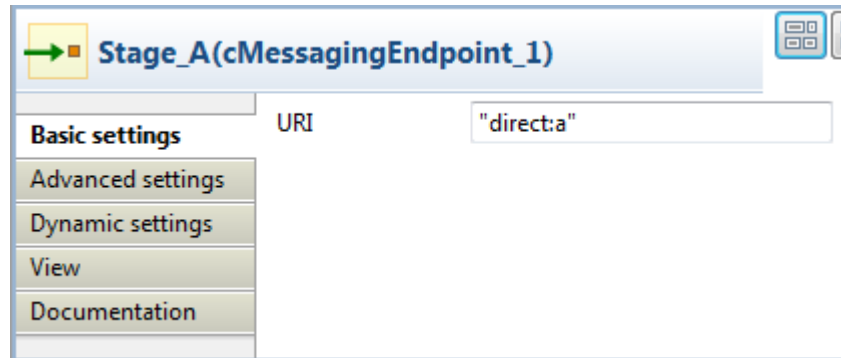

Repeat this step to define the URI of stage B in the **Basic settings** view of the **cMessagingEndpoint** component labeled *Stage_B*.

- Double-click the **cProcessor** component labeled *Monitor_Receiver* to open its **Basic settings** view, and customize the code in the **Code** area to display the file names of the messages received on Receiver, as follows:

```
System.out.println("Message sent to Receiver: "+
exchange.getIn().getHeader("CamelFileName"));
```

Repeat this step to customize the code in the other two **cProcessor** components to display the file names of the messages received on stage A and stage B respectively:

```
System.out.println("Message sent to stage A: "+
exchange.getIn().getHeader("CamelFileName"));
```

```
System.out.println("Message sent to stage B: "+
exchange.getIn().getHeader("CamelFileName"));
```

- Press **Ctrl+S** to save your Route.

Viewing code and executing the Route


- Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Sender")).routeId("Sender").pipeline(
                "direct:a", "direct:b")
                .id("cPipesAndFilters_1").to(
                    uriMap.get("Receiver")).id("cFile_2")
        }
    };
}
```

As shown in the code, messages sent from *Sender* are redirected to endpoints identified by *direct:a* and *direct:b* by *cPipesAndFilters_1* before being routed to *Receiver*.

- Press **F6** to run your Route.

RESULT: The message delivery goes through *stage A* and then *stage B* before reaching *Receiver*.

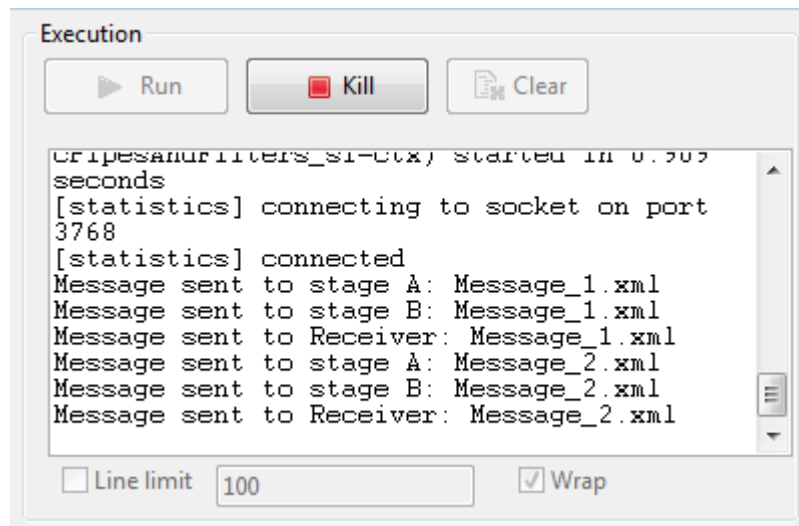

cRecipientList




cRecipientList properties

Component Family	Routing	
Function	cRecipientList is designed to route messages to a number of dynamically specified recipients.	
Purpose	cRecipientList allows you to route messages to a number of dynamically specified recipients.	
Basic settings	<i>Language</i>	Select the expression language from the drop-down list.
	<i>Expression</i>	Type in the expression that returns multiple endpoints.
	<i>Stop On Exception</i>	Select this check box to stop processing immediately when an exception occurred.
	<i>Ignore Invalid Endpoints</i>	Select this check box to ignore invalid endpoints.
	<i>Parallel Processing</i>	Select this check box to send the message to the recipients simultaneously.
Usage	As a middle component, cRecipientList allows you to route messages to a number of dynamically specified recipients.	
Limitation	n/a	

Scenario: Routing a message to multiple recipients

In this scenario, a **cRecipientList** component is used to route a message to a list of recipients.

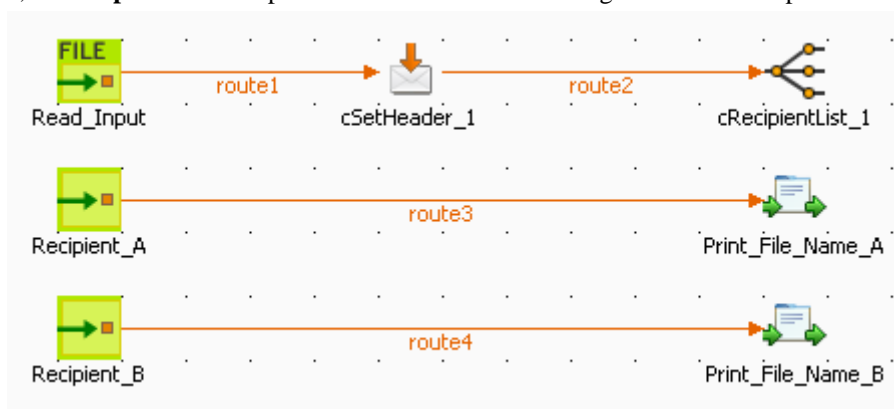

To build the Route, do the following.


Dropping and linking the components

1. Drag and drop the components from the **Palette** onto the workspace: **cFile**, **cSetHeader**, **cRecipientList**, two **cMessagingEndpoint** and two **cProcessor**. Change the label of the **cFile** component to **Read_Input**. Change the labels of the two **cMessagingEndpoint** components to **Recipient_A** and **Recipient_B**. Change the labels of the two **cProcessor** components to **Print_File_Name_A** and **Print_File_Name_B**.


2. Link **Read_Input** to **cSetHeader** using a **Row > Route** connection.
3. Link **cSetHeader** to **cRecipientList** using a **Row > Route** connection.
4. Link **Recipient_A** to **Print_File_Name_A** using a **Row > Route** connection.
5. Link **Recipient_B** to **Print_File_Name_B** using a **Row > Route** connection.

Configuring the components


1. Double-click **cFile** to open its **Basic settings** view in the **Component** tab.

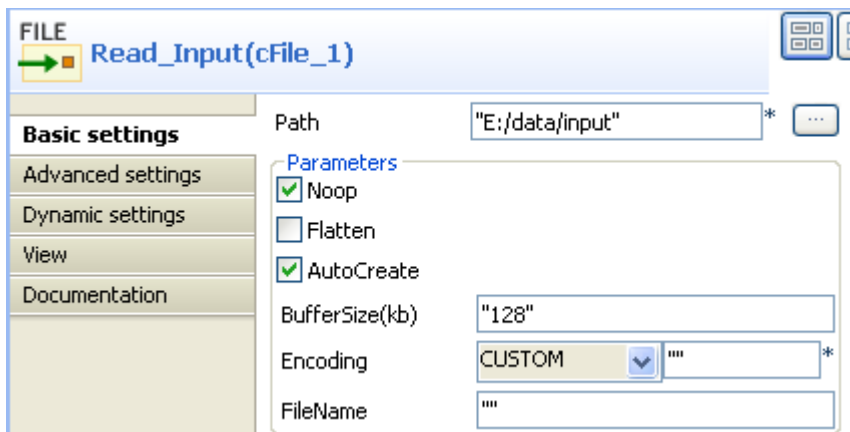

2. In the **Path** field, type in the path to the source message, for example, *"E:/data/input"*. Keep other default settings unchanged.
3. Double-click **cSetHeader** to open its **Basic settings** view in the **Component** tab.

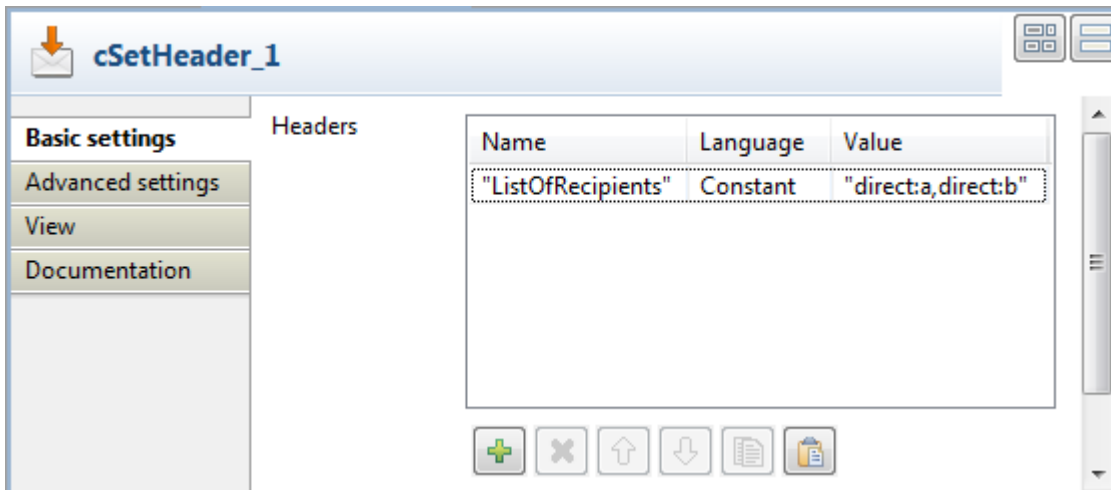


4. Click **[+]** to add a row to the **Headers** table.
 In the **Name** field, enter the header name, for example, *"ListOfRecipients"*.
 In the **Language** list, select *Constant*.
 In the **Value** field, enter the endpoint URIs, for example, *"direct:a,direct:b"*.
5. Double-click **cRecipientList** to open its **Basic settings** view in the **Component** tab.

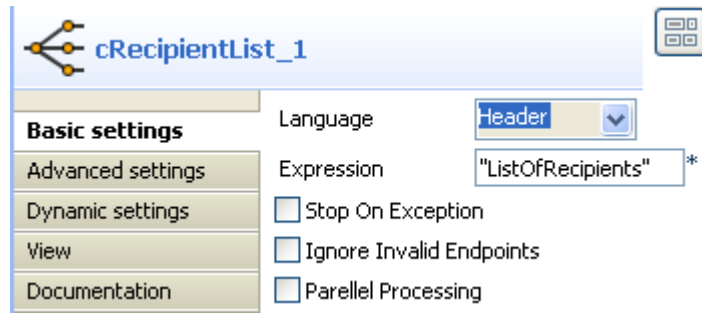

- In the **Language** list, select **Header**.

In the **Expression** field, enter the name of the header that contains the recipients list, that is, *"ListOfRecipients"*.


- Double-click **Recipient_A** to open its **Basic settings** view in the **Component** tab and define the URI of recipient A.

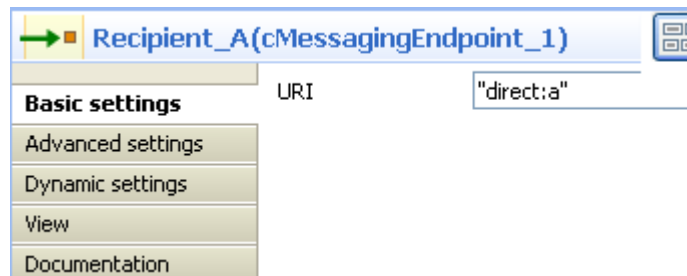

Perform the same operation to **Recipient_B** to define the URI of recipient B.

- Double-click **Print_File_Name_A** to open its **Basic settings** view in the **Component** tab and enter the code below to print out the message received by **Recipient_A**.

```
System.out.println("Recipient_a just
downloaded: "+exchange.getIn().getHeader("CamelFileName"));
```

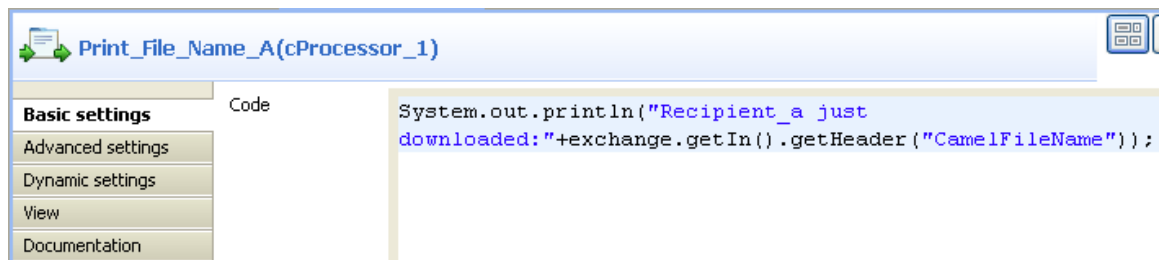

Perform the same operation to **Print_File_Name_B** and type in the code below in its code box:

```
System.out.println("Recipient_b just
downloaded: "+exchange.getIn().getHeader("CamelFileName"));
```

- Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

- Click the **Code** tab at the bottom of the design workspace to check the generated code.

```

public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Read_Input")).routeId("Read_Input")
                .setHeader("ListOfRecipients").constant(
                    "direct:a,direct:b").id("cSetHeader_1")
                .recipientList().header("ListOfRecipients").id(
                    "cRecipientList_1");
            from(uriMap.get("Recipient_A")).routeId("Recipient_A")
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        System.out
                            .println("Recipient_a just downloaded:"
                                + exchange
                                    .getIn()
                                    .getHeader(
                                        "CamelFileName"));
                    }
                })
                .id("cProcessor_1");
            from(uriMap.get("Recipient_B")).routeId("Recipient_B")
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        System.out
                            .println("Recipient_b just downloaded:"
                                + exchange
                                    .getIn()
                                    .getHeader(
                                        "CamelFileName"));
                    }
                })
                .id("cProcessor_4");
        }
    };
}

```

As shown above, the route gets the message from Read_Input, and .setHeader("ListOfRecipients") recipients using .constant("direct:a,direct:b"). Then, cRecipientList_1 reads .header("ListOfRecipients") and routes the message to the recipients included in it.

2. Press **F6** to execute the Route.

The message is sent to recipients included in the header.

```

-----
[statistics] connecting to socket on port 3620
[statistics] connected
Recipient_a just downloaded:File_A.txt
Recipient_b just downloaded:File_A.txt

```

cRoutingSlip



cRoutingSlip properties


Component Family	Routing	
Function	cRoutingSlip allows you to route a message or messages consecutively through a series of processing steps, with the sequence of steps unknown at design time and variable for each message.	
Purpose	cRoutingSlip is used to route a message or messages consecutively to a series of endpoints.	
Basic settings	<i>Header name</i>	Type in name of the message header as defined in the preceding cSetHeader component, <i>mySlip</i> by default. The header should carry a list of endpoint URIs you wish each message to be routed to.
	<i>URI delimiter</i>	Delimiter used to separate multiple endpoint URIs carried in the message header, comma (,) by default.
Usage	cRoutingSlip is used as a middle or end component of a sub-route. It always follows a cSetHeader component, which sets a header to each message to carry a list of endpoint URIs.	
Limitation	n/a	

Scenario 1: Routing a message consecutively to a series of endpoints

In this scenario, messages from a file system is routed consecutively to a series of endpoints according to the URIs carried in the message header.

Dropping and linking the components


This use case requires a **cFile** component as the message sender, a **cSetHeader** component to define a series of endpoints, a **cRoutingSlip** component to route messages to the endpoints consecutively, three **cMessagingEndpoint** components to retrieve messages routed to the endpoints, and three **cProcessor** components to monitor messages routed to the connected messaging endpoints.

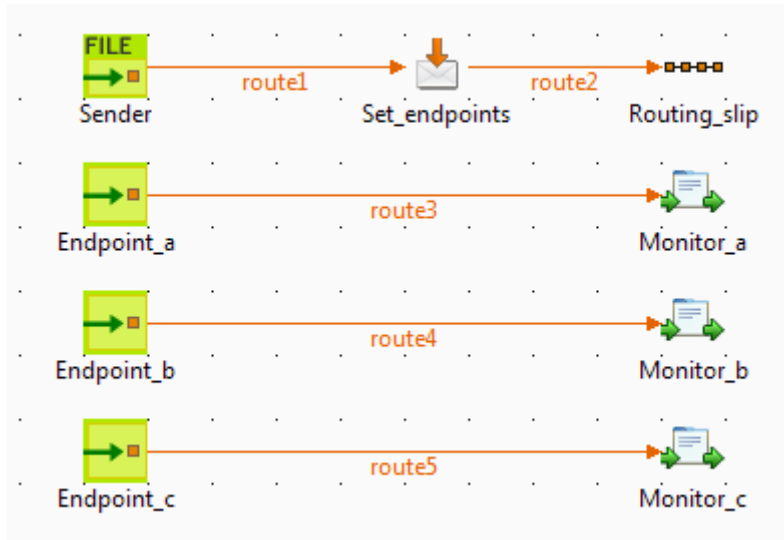

1. From the **Palette**, expand the **Messaging** folder, drop one **cFile** and three **cMessagingEndpoint** components onto the design workspace, and label them to better identify their roles in the Route, as shown above.
2. From the **Transformation** folder, drop a **cSetHeader** component onto the design workspace, and label it to better identify its role in the Route.
3. From the **Routing** folder, drop a **cRoutingSlip** component onto the design workspace, and label it to better identify its role in the Route.
4. From the **Processor** folder, drop three **cProcessor** components onto the design workspace, and label them to better identify their roles in the Route.
5. Right-click the **cFile** component, select **Row > Route** from the contextual menu and click the **cSetHeader** component.
6. Right-click the **cSetHeader** component, select **Row > Route** from the contextual menu and click the **cRoutingSlip** component.
7. Repeat this operation to connect the **cMessagingEndpoint** components to the corresponding **cProcessor** components.

Configuring the components and connections


1. Double-click the **cFile** component, which is labelled *Sender*, to display its **Basic settings** view in the **Component** tab.

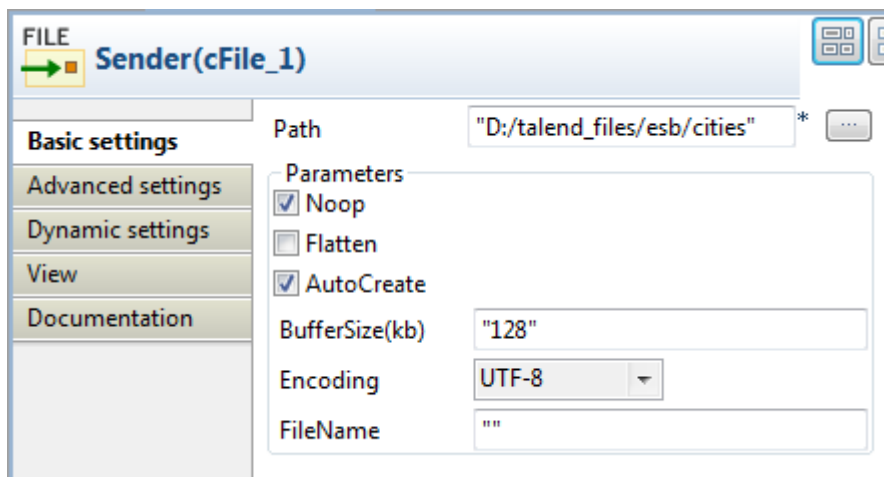

- In the **Path** field, fill in or browse to the path to the folder that holds the source files *Beijing.xml*, *London.xml*, *Paris.xml*, and *Washington.xml*.

From the **Encoding** list, select the encoding type of your source files. Leave the other parameters as they are.

- Double-click the **cSetHeader** component, which is labelled *Set_endpoints*, to display its **Basic settings** view in the **Component** tab.

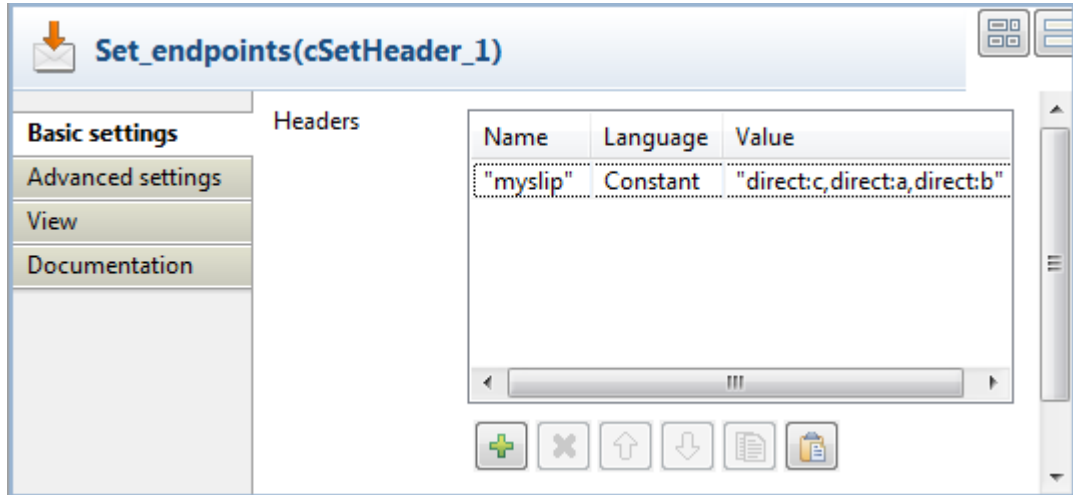

- Click **[+]** to add a row to the **Headers** table.

In the **Name** field, type in the name of the header you want to add to each message.


In this use case, we simply use *mySlip*, which is the default value filled in the **Header name** field of the **cRoutingSlip** component.

- From the **Language** list box, select the **Constant** or **Simple**, and in the **Value** field, type in the URIs you wish the message to be routed consecutively to, separated by a comma, which is the default value of the **URI delimiter** field of the **cRoutingSlip** component.

In this use case, we want the message to be routed first to endpoint *c*, then to endpoint *a*, and finally to endpoint *b*.


- Double-click the **cRoutingSlip** component, which is labelled *Routing_slip*, to display its **Basic settings** view in the **Component** tab, and define the message header in the **Header name** field and the URI delimiter in the **URI delimiter** field.

In this use case, we simply use the default settings.

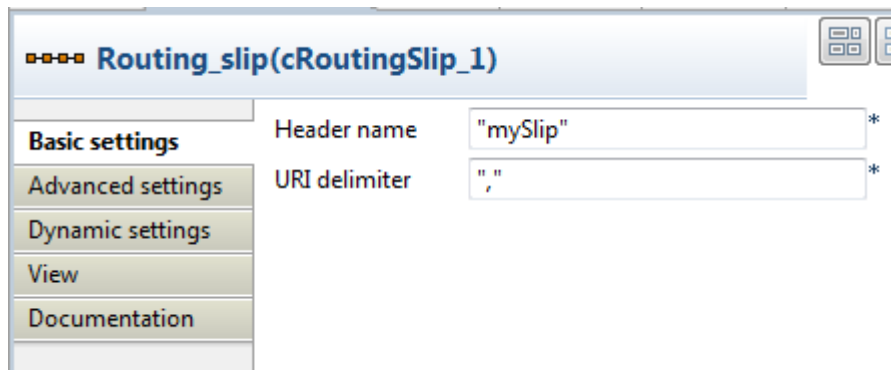

- Double-click the **cMessagingEndpoint** component labelled *Endpoint_a* to display its **Basic settings** view in the **Component** tab, and type in the URI in the **URI** field for the destination of your messages.

Here, we want to use this component to retrieve the message routed to the URI *direct:a*.

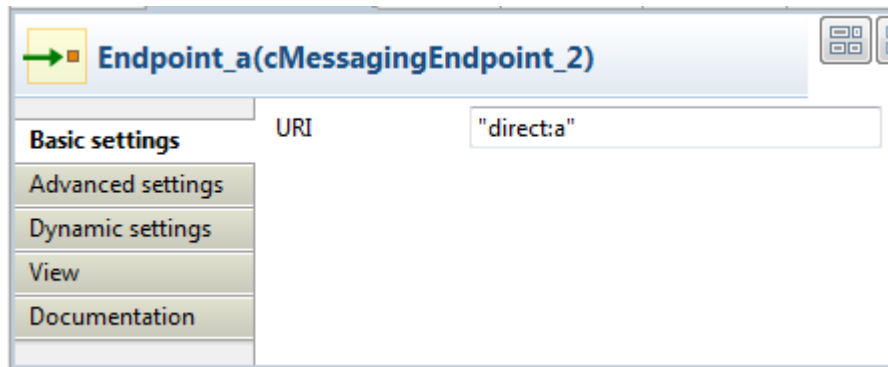

Repeat this step to set the endpoint URIs in the other **cMessagingEndpoint** components: *direct:b* and *direct:c* respectively.

8. Double-click the **cProcessor** component, which is labelled *Monitor_a*, to display its **Basic settings** view in the **Component** tab, and customize the code so that the console will display information the way you wish.

Here, we want to use this component to monitor the messages routed to the connected endpoint *a* and display the file name, so we customize the code accordingly, as follows:

```
System.out.println("Message received on endpoint a: "+
exchange.getIn().getHeader("CamelFileName"));
```

Repeat this step to customize the code for the other two **cProcessor** components, for messages routed to the connected endpoints *b* and *c* respectively.

```
System.out.println("Message received on endpoint b: "+
exchange.getIn().getHeader("CamelFileName"));
```

```
System.out.println("Message received on endpoint c: "+
exchange.getIn().getHeader("CamelFileName"));
```

9. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route


1. Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Sender")).routeId("Sender").setHeader(
                "mySlip")
                .constant("direct:c,direct:a,direct:b").id(
                    "cSetHeader_1").routingSlip(
                    header("mySlip"), ",").id(
                    "cRoutingSlip_1");
        }
    };
}
```

In this partially shown code, messages from the sender are given a header according to `.setHeader`, which carries a list of URIs (`direct:c,direct:a,direct:b`), and then routed in the slip pattern according by `cRoutingSlip_1`.

2. Click the **Run** view to display it and click the **Run** button to launch the execution of your Route.

You can also press **F6** to execute it.

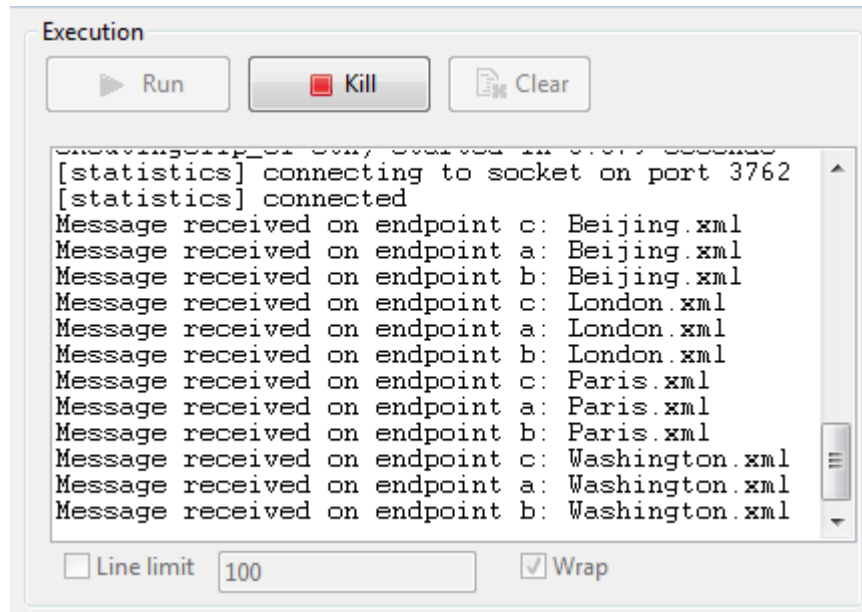

RESULT: The source file messages are routed consecutively to the defined endpoints: *c*, then *a*, and then *b*.

Scenario 2: Routing each message conditionally to a series of endpoints

In this scenario, which is based on the previous scenario, each message from a file system is routed consecutively to different endpoints according to the city name it contains.

All files used in this use case are named after the city name they contain. The following are the extracts of two examples:

Beijing.xml:

```
<person>
  <firstName>Nicolas</firstName>
  <lastName>Yang</lastName>
  <city>Beijing</city>
</person>
```

Paris.xml:

```
<person>
  <firstName>Pierre</firstName>
  <lastName>Dupont</lastName>
  <city>Paris</city>
</person>
```

A predefined Java Bean, *setEndpoints*, is called in this use case to return endpoint URIs according to the city name contained in each message, so that the messages will be routed as follows:

- The message containing the city name *Paris* will be routed first to endpoint *a*, then to endpoint *b*, and finally to endpoint *c*.
- The message containing the city name *Beijing* will be routed first to endpoint *c*, then to endpoint *a*, and finally to endpoint *b*.
- Any other messages will be routed to endpoint *b* and then to endpoint *c*.

For more information about creating and using Java Beans, see *Talend Open Studio for ESB User Guide*.

```
package beans;

import org.w3c.dom.Document;
import org.w3c.dom.Element;
import org.w3c.dom.NodeList;

public class setEndpoints {
    public String helloExample(Document document) {
        NodeList cities = document.getDocumentElement().getElementsByTagName(
            "city");
        Element city = (Element) cities.item(0);
        String textContent = city.getTextContent();
        if ("Paris".equals(textContent)) {
            return "direct:a,direct:b,direct:c";
        } else if ("Beijing".equals(textContent)) {
            return "direct:c,direct:a,direct:b";
        } else
            return "direct:b,direct:c";
    }
}
```


Dropping and linking the components

In this scenario, we will reuse the Route set up in the previous scenario, without adding or removing any components or modifying any connections.

Configuring the components and connections

In this scenario, we only need to configure the **cSetHeader** component to call the predefined Java Bean, and keep the settings of all the other components as they are in the previous scenario.

1. Double-click the **cSetHeader** component to display its **Basic settings** view in the **Component** tab.

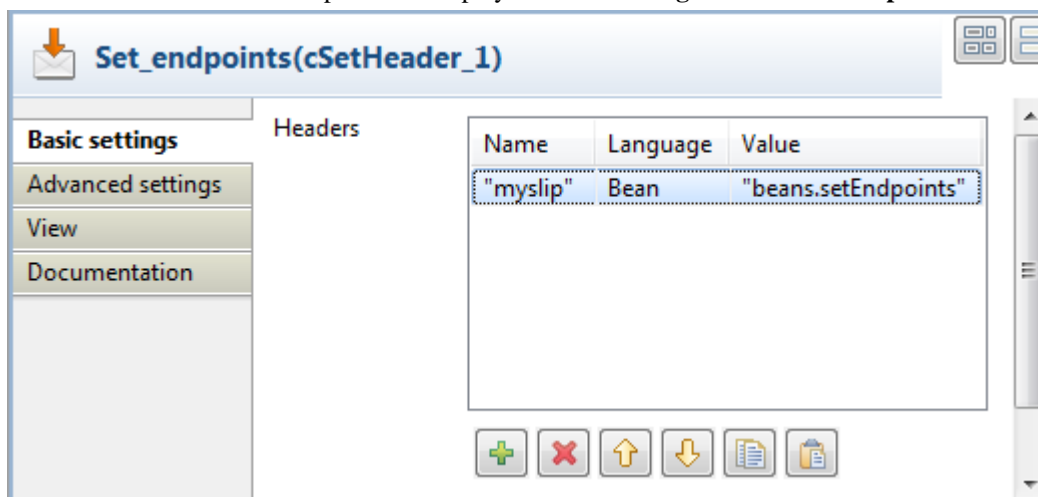

2. Select **Bean** from the **Language** list box, and in the **Value** field, specify the Java Bean that will return the endpoint URIs. In this use case, type in:

```
beans.setEndpoints
```

3. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route


1. Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Sender")).routeId("Sender").setHeader(
                "mySlip").method(beans.setEndpoints.class).id(
                "cSetHeader_1").routingSlip(header("mySlip"),
                ",").id("cRoutingSlip_1");
        }
    };
}
```

In this partially shown code, messages from the sender are given a header according to `.setHeader`, which carries a list of URIs returned by the `beans.setEndpoints.class`, and then routed to the `cRoutingSlip_1`.

2. Click the **Run** view to display it and click the **Run** button to launch the execution of your Route.

You can also press **F6** to execute it.

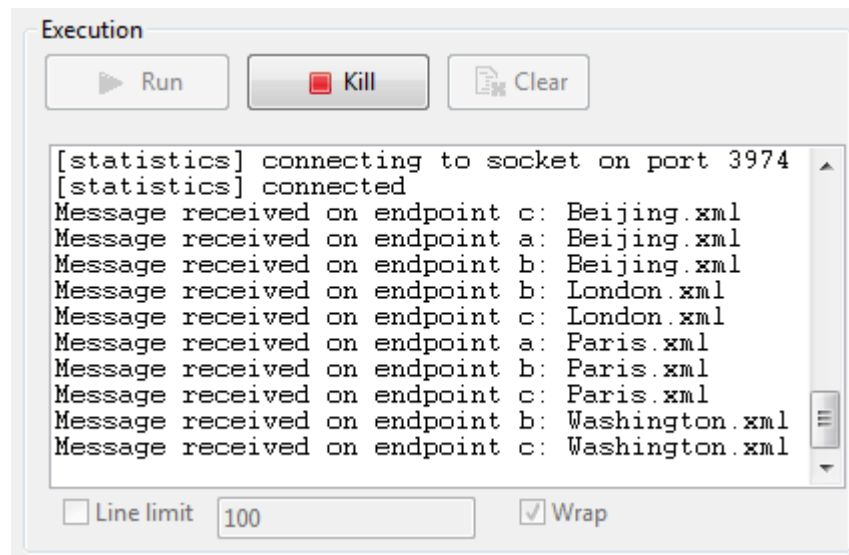

RESULT: The sources are routed consecutively to the defined endpoints: the message containing the city name *Beijing* is routed first to endpoint *c*, then to endpoint *a*, and finally to endpoint *b*; the message containing the city name *Paris* is routed first to endpoint *a*, then to endpoint *b*, and finally to endpoint *c*; the other messages are routed to endpoint *b* and then to endpoint *c*.

cSplitter



cSplitter properties

Component Family	Routing	
Function	cSplitter splits a message into several submessages according to a condition.	
Purpose	cSplitter separates multiple elements of a message so that they can be handled and treated differently in individual routes	
Basic settings	<i>Expression</i>	Type in the expression to use to split the messages.
Usage	cSplitter is used as a middle component in a Route.	
Connections	<i>split</i>	Select this link to route the splitted messages to the next endpoint.
	<i>Route</i>	Select this link to route all the messages from the sender to the next endpoint.
Limitation	n/a	

Related scenario:

For a related scenario, see [section *Scenario: Splitting a message and renaming the sub-messages according to contained information*](#) of [section *cSetHeader*](#).

cThrottler




cThrottler properties

Component Family	Routing	
Function	cThrottler is designed to limit the number of messages flowing to the subsequent endpoint.	
Purpose	cThrottler allows you to limit the number of messages flowing to a specific endpoint in order to prevent it from getting overloaded.	
Basic settings	<i>Request per period</i>	The number of messages allowed to pass cThrottler within the defined time period.
	<i>Set time period</i>	Select this check box to set the value of the time period (in milliseconds) and enable throttling.
	<i>Use asynchronous delaying</i>	If this check box is selected, any messages that are delayed will be routed asynchronously using a scheduled thread pool.
Usage	Being a middle component, cThrottler allows you to limit the number of messages flowing to a specific endpoint in order to prevent it from getting overloaded.	
Connections	<i>throttler</i>	Select this link to route the throttled messages to the next endpoint.
	<i>Route</i>	Select this link to route all the messages from the sender to the next endpoint.
Limitation	n/a	

Scenario: Throttling the message flow

In this scenario, a **cThrottler** component is used to reduce the number of messages flowing out within a time period.

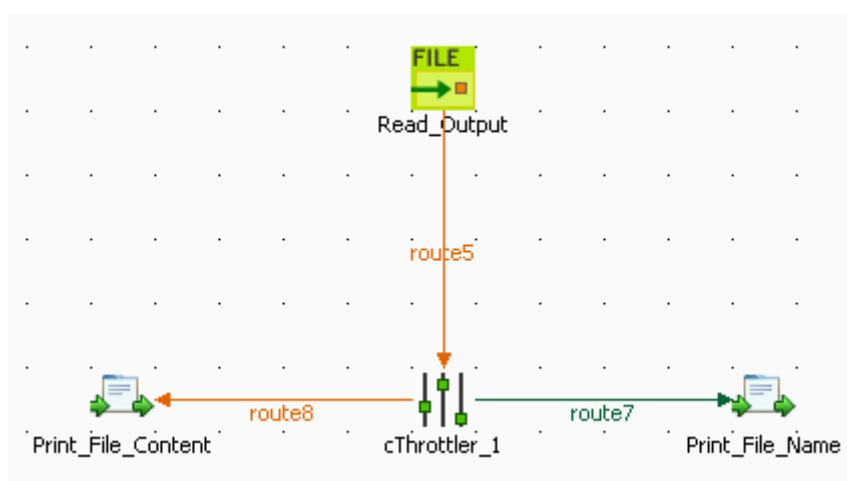


To build the Route, do the following.

Dropping and linking the components


1. Drag and drop the components from the **Palette** onto the workspace: **cThrottler**, **cFile** and two **cProcessor**. Change the label of the **cFile** component to **Read_Output**. Change the labels of the two **cProcessor** components to **Print_File_Name** and **Print_File_Content**.
2. Link **Read_Output** to **cThrottler** using a **Row > Route** connection.
3. Link **cThrottler** to **Print_File_Name** using a **Row > Throttler** connection, and to **Print_File_Content** using a **Row > Route** connection.

Configuring the components

1. Double-click **Read_Output** to open its **Basic settings** view in the **Component** tab.

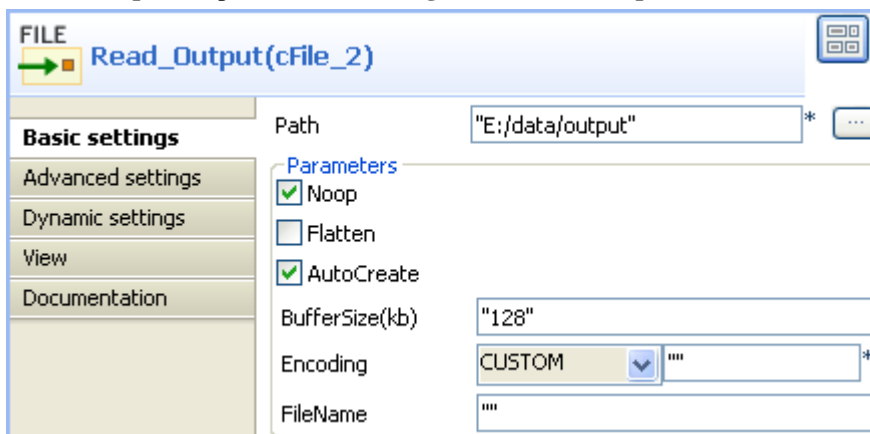


2. In the **Path** field, type in the path to the source message, for example, `"E:/data/output"`. Keep the default settings for other fields.
3. Double-click **cThrottler** to open its **Basic settings** view in the **Component** tab.

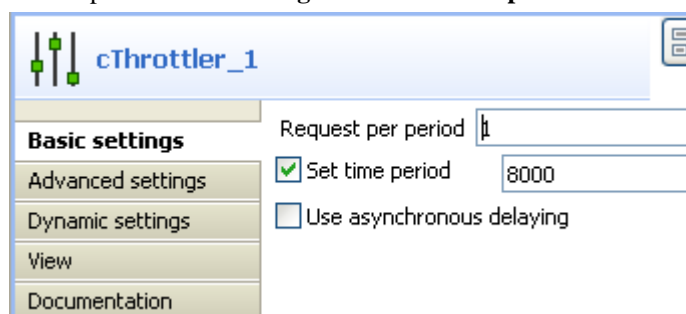

4. In the **Request per period** field, type in the number of messages allowed to pass the throttler per period, for example, `1`.

In the **Set time period** field, type in the value of the period, for example, `8000`.


5. Double-click **Print_File_Name** to open its **Basic settings** view in the **Component** tab.

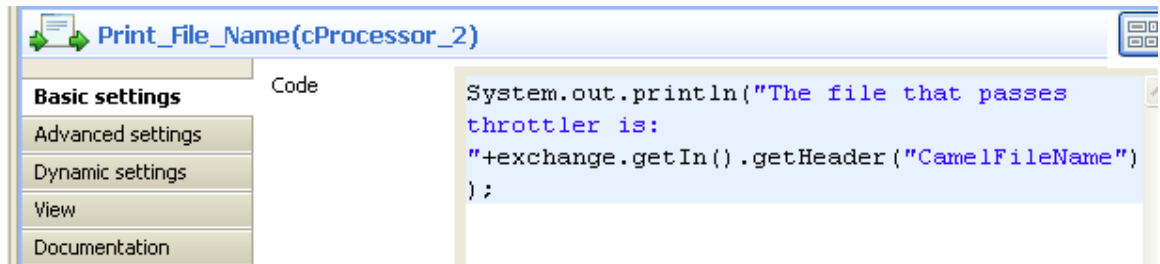

- In the **Code** box, enter the code below to get the name of the message that passes the throttler.

```
System.out.println("The file that passes throttler is:
"+exchange.getIn().getHeader("CamelFileName"));
```

- Double-click **Print_File_Content** to open its **Basic settings** view in the **Component** tab.

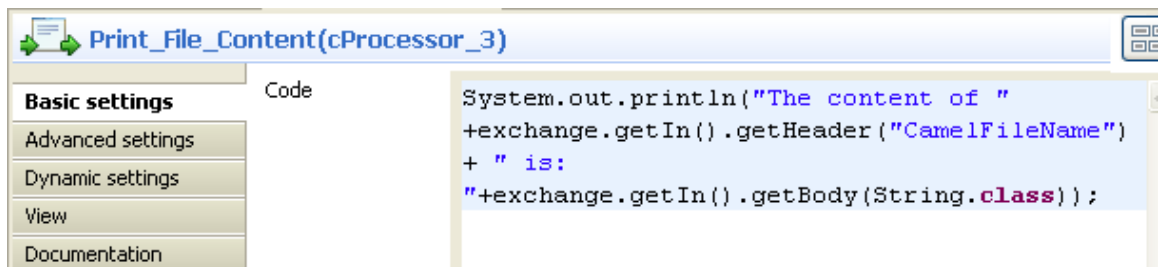

- In the **Code** box, enter the code below to get the content of the message that passes the throttler.

```
System.out.println("The content of " +exchange.getIn().getHeader("CamelFileName")+ "
is: "
+exchange.getIn().getBody(String.class));
```

- Press **Ctrl+S** to save your Route.

Viewing the code and executing the Route

- Click the **Code** tab at the bottom of the design workspace to check the generated code.

```

public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Read_Output")).routeId("Read_Output")
                .throttle(1).timePeriodMillis(8000).id(
                    "cThrottler_1").process(
                    new org.apache.camel.Processor() {
                        public void process(
                            org.apache.camel.Exchange exchange)
                            throws Exception {
                            System.out
                                .println("The file that passes throttler is: "
                                    + exchange
                                        .getIn()
                                        .getHeader(
                                            "CamelFileName"));
                                ;
                            }
                    })
                .id("cProcessor_2").end().process(
                    new org.apache.camel.Processor() {
                        public void process(
                            org.apache.camel.Exchange exchange)
                            throws Exception {
                            System.out
                                .println("The content of "
                                    + exchange
                                        .getIn()
                                        .getHeader(
                                            "CamelFileName")
                                    + " is: "
                                    + exchange
                                        .getIn()
                                        .getBody(
                                            String.class));
                                ;
                            }
                    })
                ;
        }
    };
}

```

As shown above, the messages from Read_Output go through throttling at cThrottler_1, with only (1) message allowed to leave the throttler within each timePeriodMillis(8000). Meanwhile, the filename and the content of the throttled message are printed out via the two processors.

2. Press **F6** to execute the Route.

As shown below, *File_A.txt* was delivered within the first time period while in the second period, *File_B.txt* was delivered as well.

cWireTap




cWireTap properties

Component Family	Routing	
Function	cWireTap allows you to route messages to a separate tap endpoint while it is forwarded to the ultimate destination.	
Purpose	cWireTap is used to route messages to a separate endpoint while forwarded to the ultimate destination.	
Basic settings	URI	The endpoint URI to send the wire tapped message.
	Populate new exchange	Select this check box to populate a new exchange of the message.
	Populate Type	This option appears when the Populate new exchange check box is selected. The Populate Type is either Expression or Processor .
		Expression: Using expression allows you to set the message body of the new exchange. Language: Select the language of the expression you want to use to set the message body between Constant , Header , None , Property , Simple , XPath . Expression: Enter the expression to set the message body.
		Processor: Using processor gives you full power to specify how the exchange is populated as you can set properties, headers and so on to the message with a piece of Java code in the Code field.
	Copy the original message	Select this check box to use a copy of the exchange when wire tapping the message. This option appears when the Populate new exchange check box is selected.
Usage	cWireTap can be a middle component in a Route.	
Limitation	n/a	

Scenario: Wiretapping a message in a Route

In this scenario, a cWireTap component is used to route a message to a separate endpoint while it is routed to the ultimate destination.

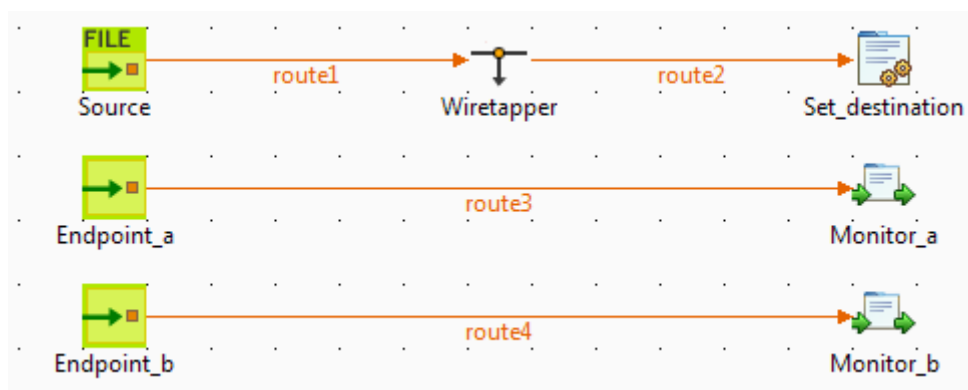


Dropping and linking the components


1. From the **Palette**, expand the **Messaging** folder, and drop a **cFile** and two **cMessagingEndpoint** components onto the design workspace.
2. Expand the **Routing** folder, and drop a **cWireTap** component onto the design workspace.
3. Expand the **Processor** folder, and drop a **cJavaDSLProcessor** and two **cProcessor** components onto the design workspace.
4. Right-click the **cFile** component, select **Row > Route** from the contextual menu and click the **cWireTap** component.
5. Repeat this operation to connect the components as shown above.
6. Label the components to better identify their functionality.

Configuring the components

1. Double-click the **cFile** component labeled *Source* to display its **Basic settings** view in the **Component** tab.

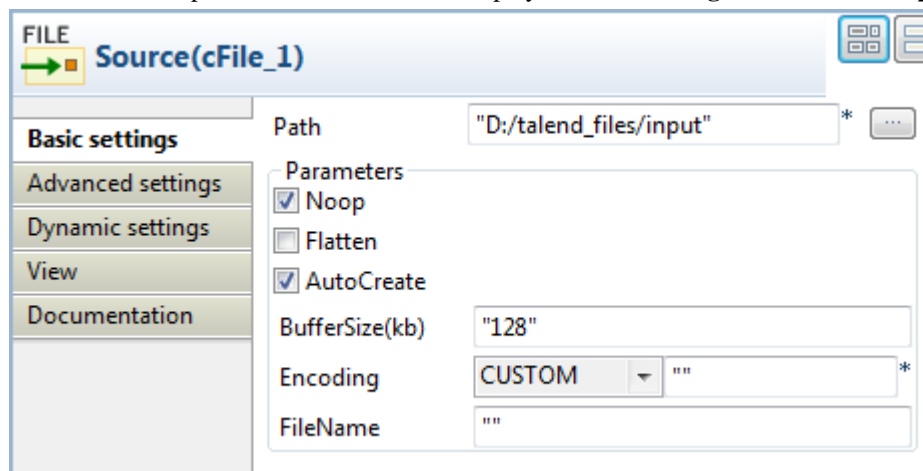

2. In the **Path** field, browse to or enter the input file path. In this use case, there is a *Hello.txt* file in the specified file path, which contains the content *Hello World!*. Leave the other parameters as they are.
3. Double-click the **cWireTap** component to display its **Basic settings** view in the **Component** tab.

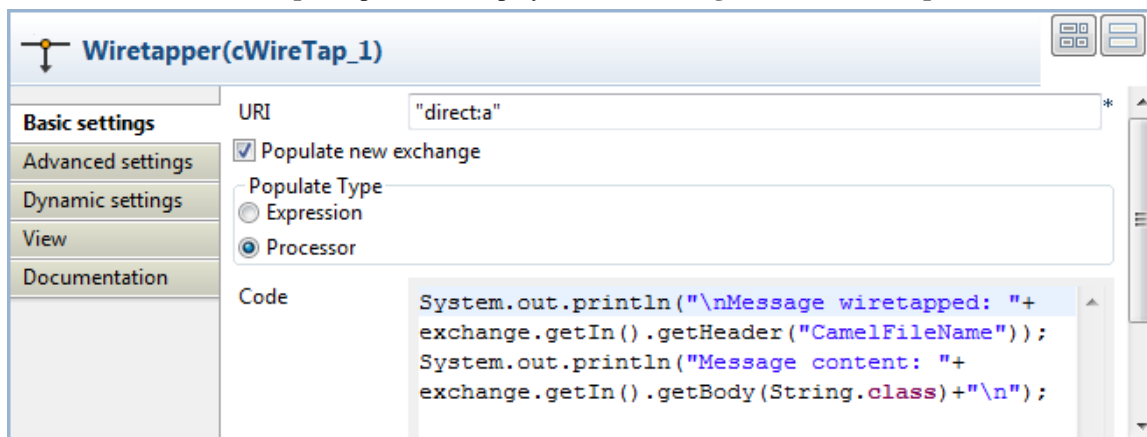


4. Enter `direct:a` in the **URI** field to route the wiretapped message to this endpoint.


Select the **Populate new exchange** check box, select **Processor** as the populate type, and then enter the following code in the **Code** box to display the file name of the wiretapped message and its content on the console:

```
System.out.println("\nMessage wiretapped: "+
exchange.getIn().getHeader("CamelFileName"));
System.out.println("Message content: "+
exchange.getIn().getBody(String.class)+"\n");
```

5. Double-click the **cJavaDSLProcessor** component to display its **Basic settings** view in the **Component** tab.

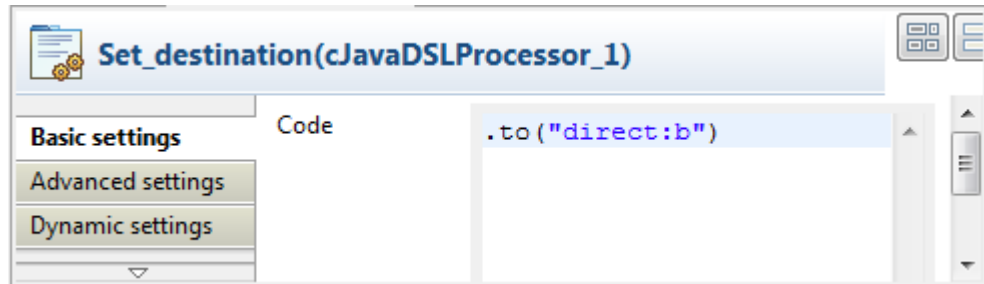


6. In the **Code** field, enter the Java code `.to("direct:b")` to define the URI of the endpoint to route the original message to.
7. Double-click the **cMessagingEndpoint** component labeled *Endpoint_a* to display its **Basic settings** view in the **Component** tab. Enter `direct:a` in the **URI** field to retrieve the message routed to this endpoint.

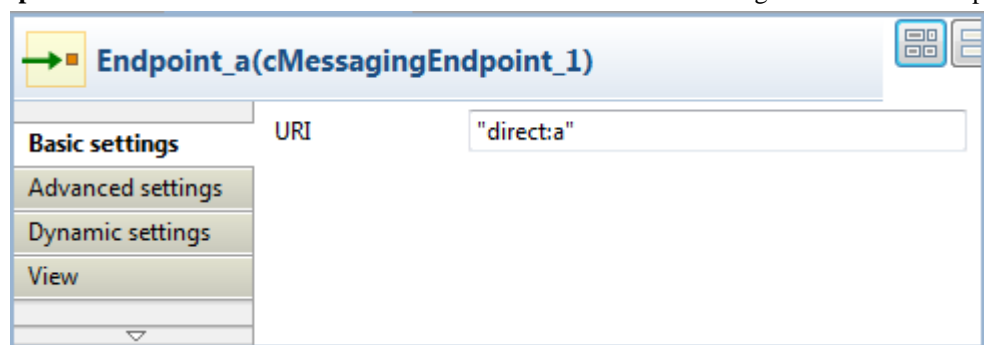

Repeat this operation to set the endpoint URI for *Endpoint_b*.

8. Double-click the **cProcessor** component labeled *Monitor_a* to display its **Basic settings** view in the **Component** tab. Enter the following code in the **Code** box to display the file name of the message routed to *Endpoint_a*.

```
System.out.println("Message on endpoint a: "+
exchange.getIn().getHeader("CamelFileName"));
```

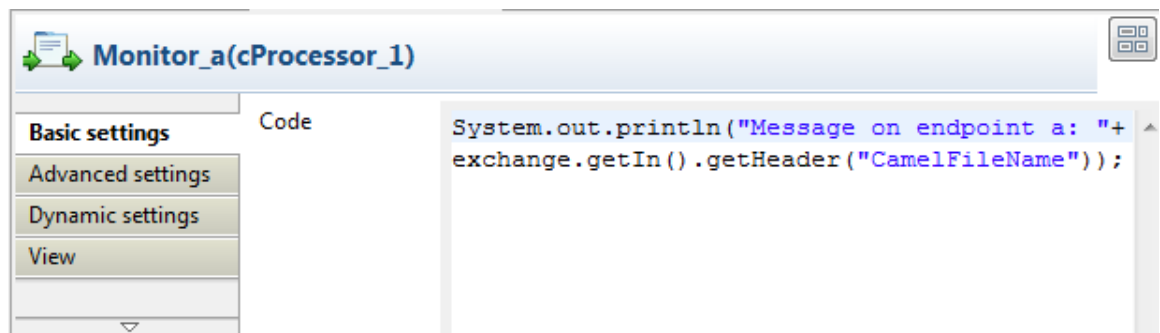

Then, configure the other **cProcessor** component in the same way to display the file name of the message routed to *Endpoint_b*.

9. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Source")).routeId("Source").wireTap(
                "direct:a").newExchange(
                    new org.apache.camel.Processor() {


                        public void process(
                            org.apache.camel.Exchange exchange)
                            throws Exception {
                            // TODO Auto-generated method stub
                            System.out
                                .println("\nMessage wiretapped: "
                                    + exchange
                                        .getIn()
                                        .getHeader(
                                            "CamelFileName"));
                            System.out.println("Message content: "
                                + exchange.getIn().getBody(
                                    String.class) + "\n");
                        }
                    })
                .id("cWireTap_1")

            .to("direct:b").id("cJavaDSLProcessor_1");
        }
    };
}
```

In this partially shown code, any message from the endpoint `Source` will be wiretapped by `.wireTap` and routed to `direct:a`. The fine name and content of each wiretapped message will be displayed on the console. The original message will be routed `.to` an endpoint identified by the URI `direct:b`, which is defined in `cJavaDSLProcessor_1`.

2. Click the **Run** view to display it and click the **Run** button to launch the execution of your Route. You can also press **F6** to execute it.

RESULT: The source message is wiretapped and routed to endpoint *a* as well as being routed to endpoint *b*.

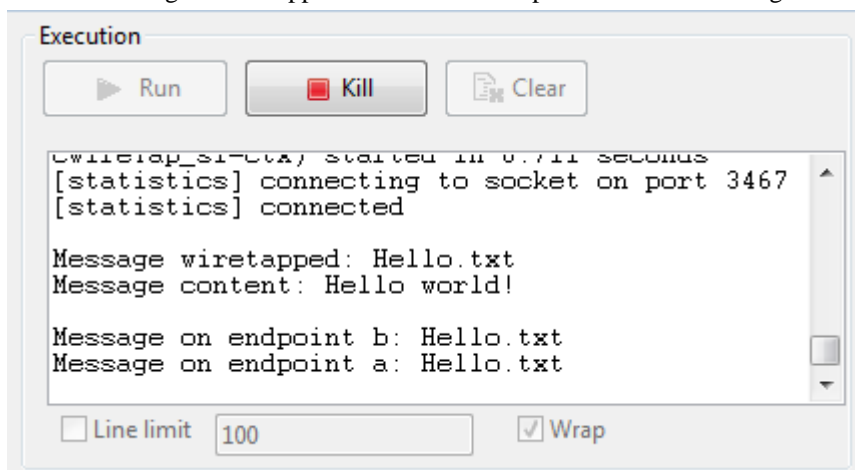



Transformation components

This chapter details the major components that you can find in **Transformation** family from the **Palette** of the **Mediation** perspective of *Talend Open Studio for ESB*.

The **Transformation** family groups component that execute data transformation processes.

cContentEnricher



cContentEnricher properties

Component Family	Transformation	
Function	cContentEnricher is designed to use a consumer or producer to obtain additional data, respectively intended for event messaging and request/reply messaging.	
Purpose	cContentEnricher allows you to use a consumer or producer to obtain additional data, respectively intended for event message messaging and request/reply messaging.	
Basic settings	<i>Resource URI</i>	This refers to the destination to which a message will be delivered if using a producer is selected; it refers to the source from which a message will be obtained if using a consumer is selected.
	<i>Using a producer</i>	Select this check box to use a producer to provide additional data, i.e. sending a message to the defined URI.
	<i>Using a consumer</i>	Select this check box to use a consumer to obtain additional data, i.e. requesting a message from the defined URI.
	<i>Use Aggregation Strategy</i>	Select this check box to define the aggregation strategy for assembling the basic message and the additional data.
	<i>Specify timeout</i>	This area appears when <i>Using a consumer</i> is selected. The timeout options are as follows: Wait until a message arrive: the component keeps waiting for a message. Immediately polls the message: the component immediately polls from the defined URI. Waiting at most until the timeout triggers: select this check box to type in a timeout value in Millis. The component waits for the message only within the defined time period.
Usage	cContentEnricher allows you to use a consumer or producer to obtain additional data, respectively intended for event message messaging and request/reply messaging.	
Limitation	n/a	


Scenario: Receiving messages from a list of URLs

In this scenario, we will use the Camel component HTTP4 and the **cContentEnricher** component to retrieve messages from a list of URLs. To do this, we need to build two sub-routes, one to read a file with a list of URLs and send the messages to the local file system, the other to retrieve the messages on these URLs.

In this use case, we will take a list of URLs on the local Tomcat server as the example. So we need to start Apache Tomcat before executing the Route.

A TXT file `URLlist` is used to provide the list of URLs, as shown below.

```
docs/introduction.html
docs/setup.html
```

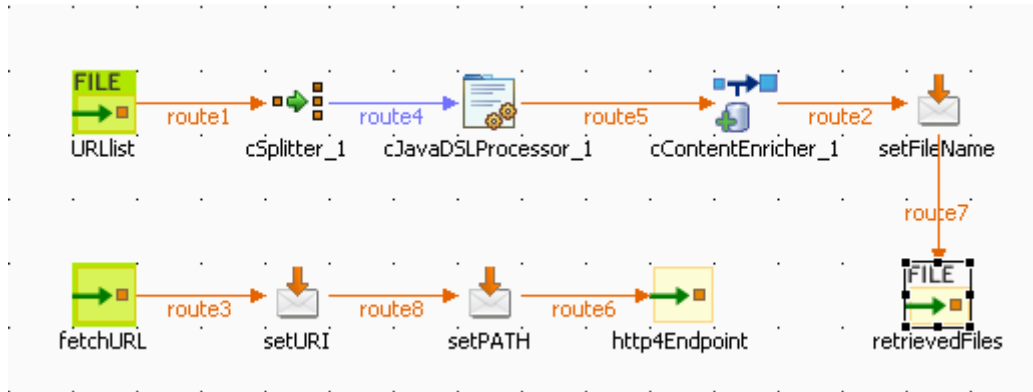


Dropping and linking the components

1. From the **Palette**, drag and drop a **cSplitter**, a **cJavaDSLProcessor**, a **cContentEnricher**, two **cFile**, two **cMessagingEndpoint**, and three **cSetHeader** components onto the design workspace.
2. Label the components properly for better identification of their roles and link them using the **Row > Route** connection as shown above.


Configuring the components

Configuring the first sub-route

1. Double-click the **URLlist** component to display its **Basic settings** view in the **Component** tab.

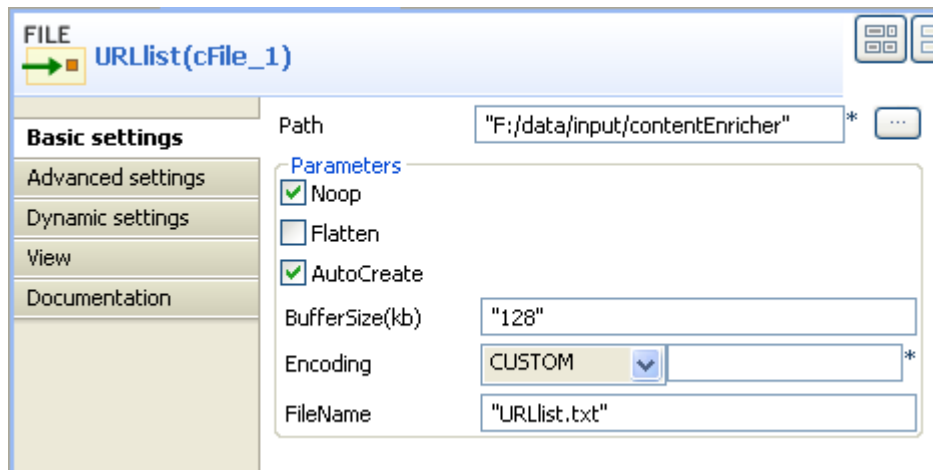

2. In the **Path** field, browse to the file path where the URL list file is saved.
In the **FileName** field, enter the filename *URLlist.txt*.
3. Double-click the **cSplitter** component to display its **Basic settings** view in the **Component** tab.

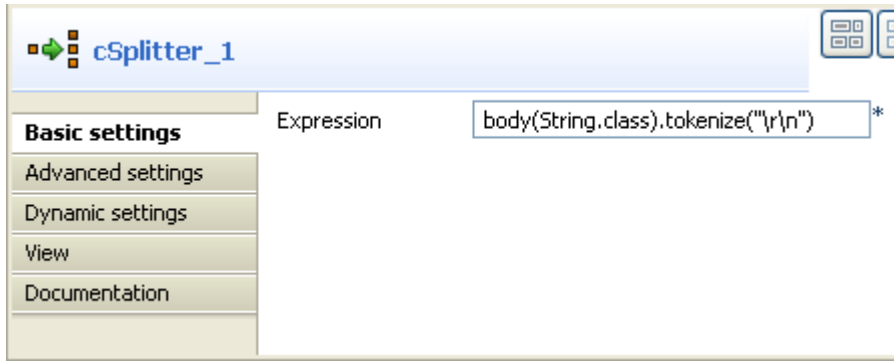


- 4. In the **Expression** field, enter the code `body(String.class).tokenize("\r\n")` to split the message in each row into sub-messages.




Note that this piece of code is for Windows only. For Unix, change it to `body(String.class).tokenize("\n")`, and for Mac, `body(String.class).tokenize("\r")`.

- 5. Double-click the **cJavaDSLProcessor** component to display its **Basic settings** view in the **Component** tab.

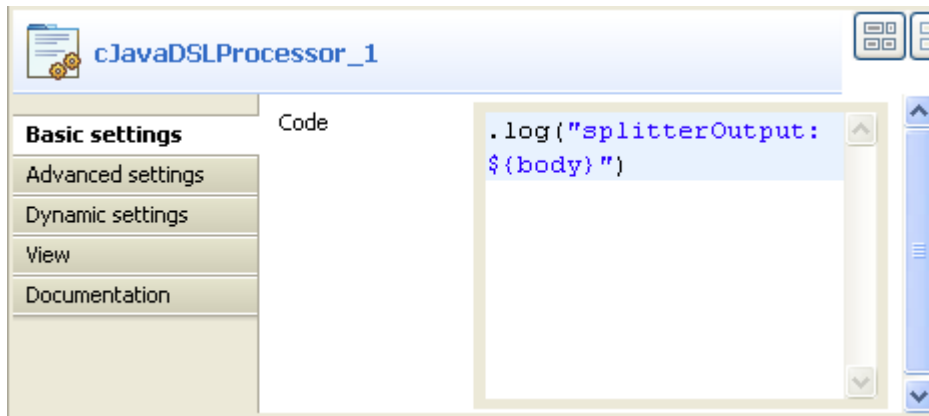

- 6. In the **Code** area, enter the code `.log("splitterOutput: ${body}")` to get the split message body.


- 7. Double-click the **cContentEnricher** component display its **Basic settings** view in the **Component** tab.

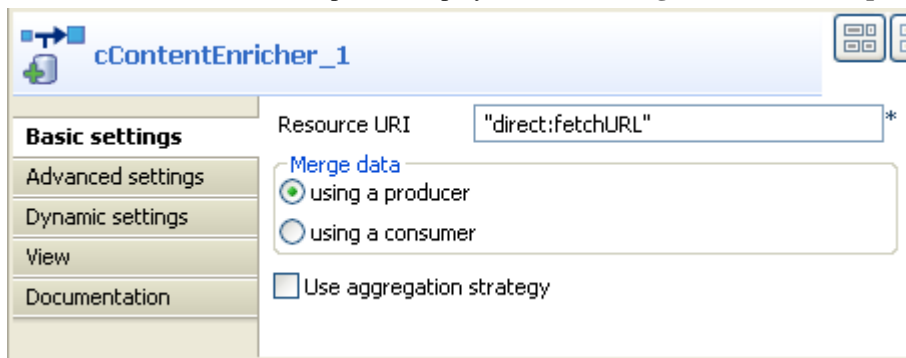

- 8. Select **using a producer** to use a producer to provide additional data and send the message to a defined URI.

In the **Resource URI** field, enter "direct:fetchURL" where the message will be delivered.

- 9. Double-click the **setFileName** component to display its **Basic settings** view in the **Component** tab.

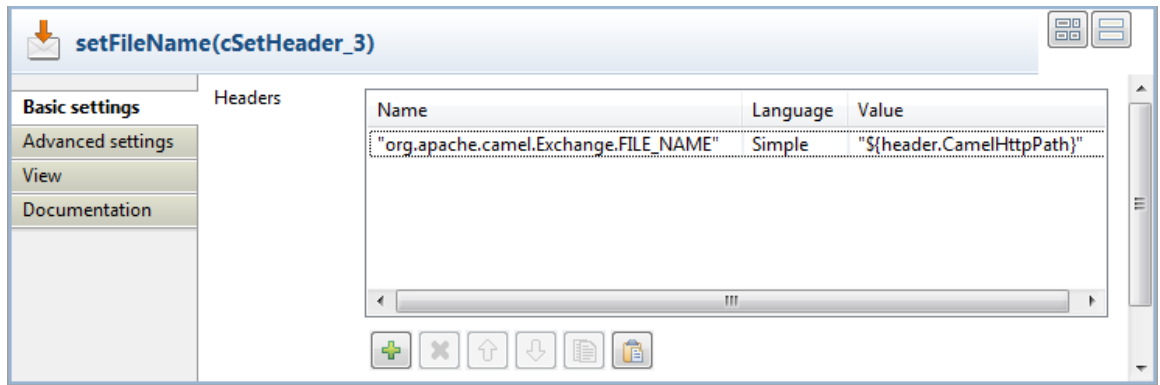


- Click [+] to add a row to the **Headers** table.

In the **Name** field, enter `org.apache.camel.Exchange.FILE_NAME` to define the file name for each incoming message.

Select **Simple** in the **Language** list.

In the **Value** field, enter `"${header.CamelHttpPath}"` to get the URI's path of the incoming message.


- Double-click the **retrievedFiles** component to display its **Basic settings** view in the **Component** tab.

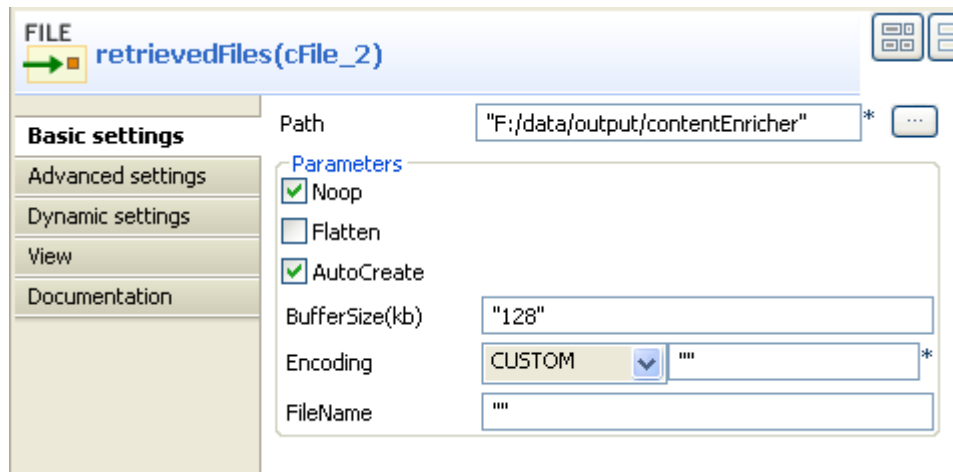


- In the **Path** field, browse to the destination file path where you want the messages to be saved.

Configuring the second sub-route

- Double-click the **fetchURL** component to display its **Basic settings** view in the **Component** tab.

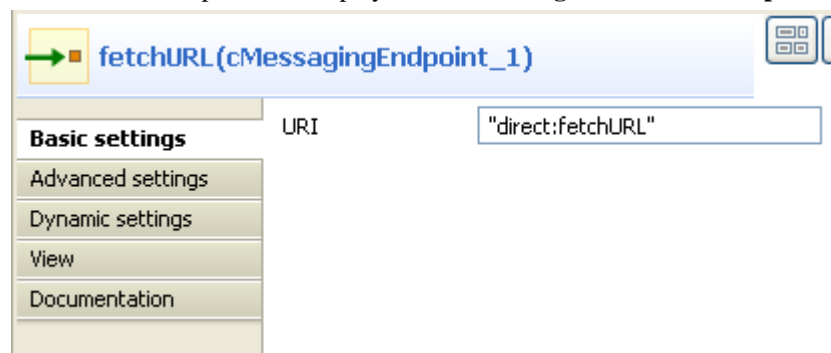

- In the **URI** field, enter `"direct:fetchURL"` that is defined in the **cContentEnricher** component.
- Double-click the **setURI** component to display its **Basic settings** view in the **Component** tab.

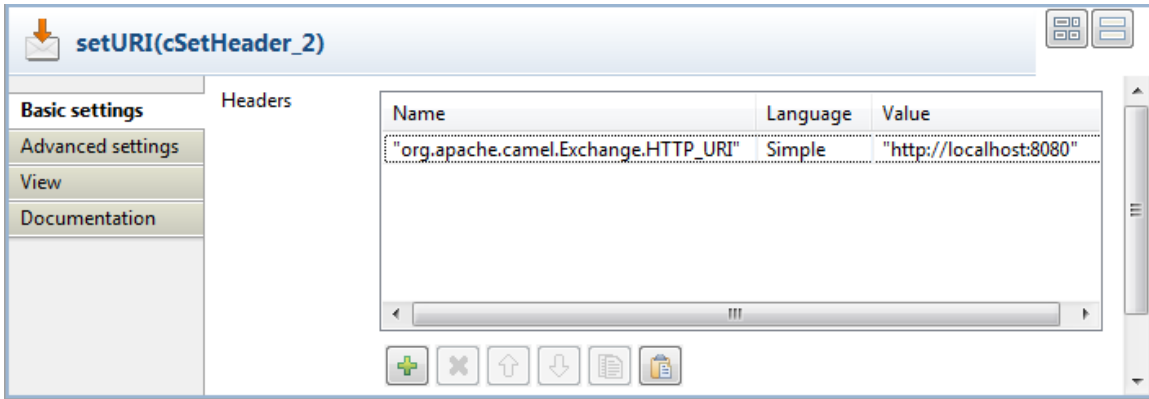


- Click [+] to add a row to the **Headers** table.

In the **Name** field, enter `org.apache.camel.Exchange.HTTP_URI` to define the HTTP URI of each message.

Select **Simple** in the **Language** list.

In the **Value** field, enter `"http://localhost:8080"` of the local Tomcat server.

- Double-click the **setPATH** component to display its **Basic settings** view in the **Component** tab.

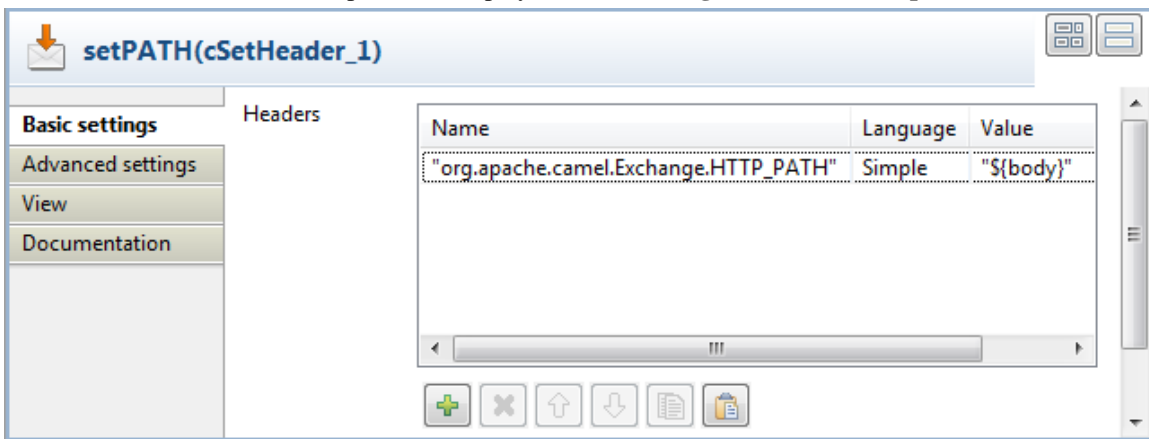


- Click [+] to add a row to the **Headers** table.


In the **Name** field, enter `org.apache.camel.Exchange.HTTP_PATH` to define the HTTP path of each message.


Select **Simple** in the **Language** list.

In the **Value** field, enter `"${body}"` that is split from the original message.

- Double-click the **http4Endpoint** component to display its **Basic settings** view in the **Component** tab.

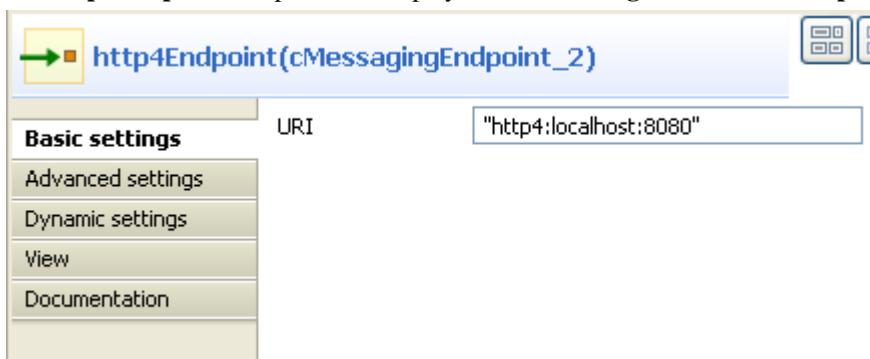

8. In the **URI** field, enter `http4:localhost:8080` to consuming HTTP resources on the local Tomcat server.
9. Click the **Advanced settings** view. Click  at the bottom of the **Dependencies** list to add a row and select `http4` from the drop-down list. For more information about HTTP4, see the site <http://camel.apache.org/http4.html>.

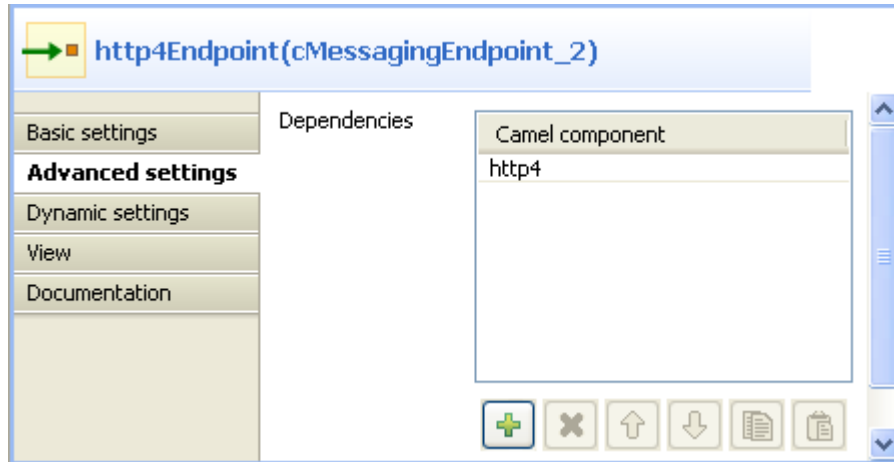

Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

1. Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```

public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("URLlist")).routeId("URLlist").split(
                body(String.class).tokenize(",")).id(
                    "cSplitter_1")

            .log("splitterOutput: ${body}") .id(
                "cJavaDSLProcessor_1")
            .enrich("direct:fetchURL")

            .id("cContentEnricher_1").setHeader(
                org.apache.camel.Exchange.FILE_NAME)
            .simple("${header.CamelHttpPath}") .id(
                "cSetHeader_3").to(
                uriMap.get("retrievedFiles") .id(
                    "cFile_2");


            from(uriMap.get("fetchURL")).routeId("fetchURL")
                .setHeader(org.apache.camel.Exchange.HTTP_URI)
                .simple("http://localhost:8080") .id(
                    "cSetHeader_2").setHeader(
                org.apache.camel.Exchange.HTTP_PATH)
                .simple("${body}") .id("cSetHeader_1").to(
                uriMap.get("http4Endpoint") .id(
                    "cMessagingEndpoint_2");
        }
    };
    getCamelContexts().get(0).addRoutes(routeBuilder);
}

```


As shown above, a message route is built from the URLlist to the retrievedFiles via the .split, .log, .enrich, and .setHeader. The other message route is built from fetchURL to http4Endpoint via two .setHeader.

- 2. Press **F6** to execute the Route.

RESULT: The split message is printed on the **Run** console.

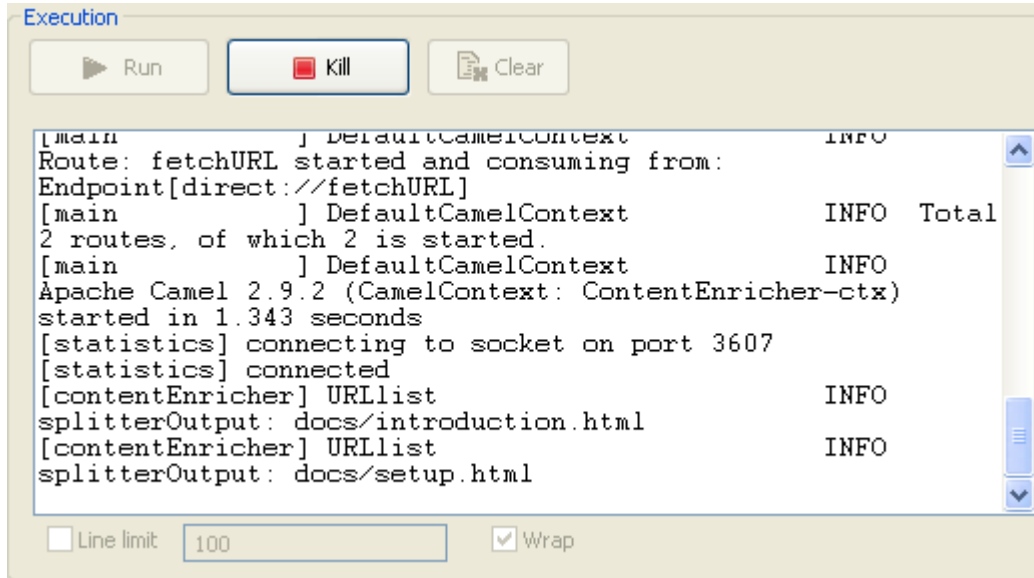

The messages from the list of URLs are saved in defined directory of the local file system.

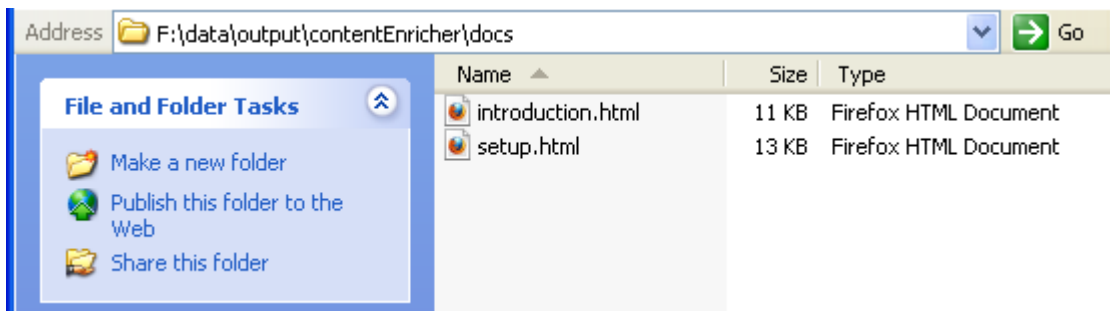

cConvertBodyTo



cConvertBodyTo properties

Component Family	Transformation	
Function	cConvertBodyTo converts the message body to the given class type.	
Purpose	cConvertBodyTo is used to convert the message body to a given class type.	
Basic settings	<i>Target Class Name</i>	Enter the name of the class type that you want to convert the message body to.
Usage	cConvertBodyTo is used as a middle component in a Route.	
Limitation		

Scenario: Converting the body of an XML file into an org.w3c.dom.Document.class


In this scenario, a **cConvertBodyTo** component is used to convert the body of an XML file into an `org.w3c.dom.Document.class`. Then a **cBean** component imports the `org.w3c.dom.Document` class, checks its content and prints out the root element name and the content of each **category** element.

The XML file is as follows:


```
<bookstore>
  <bookshelf>
    <category>Cooking</category>
    <quantity>100</quantity>
  </bookshelf>
  <bookshelf>
    <category>Languages</category>
    <quantity>200</quantity>
  </bookshelf>
  <bookshelf>
    <category>Arts</category>
    <quantity>300</quantity>
  </bookshelf>
  <bookshelf>
    <category>Science</category>
    <quantity>400</quantity>
  </bookshelf>
</bookstore>
```

Creating a Bean

1. From the repository tree view, expand the **Code** node and right click the **Beans** node. In the contextual menu, select **Create Bean**.

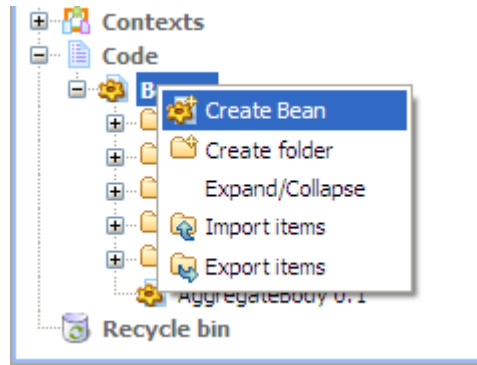

- The **New Bean** wizard opens. In the **Name** field, type in a name for the bean, for example, *PrintConvertToBean*. Click **Finish** to close the wizard.

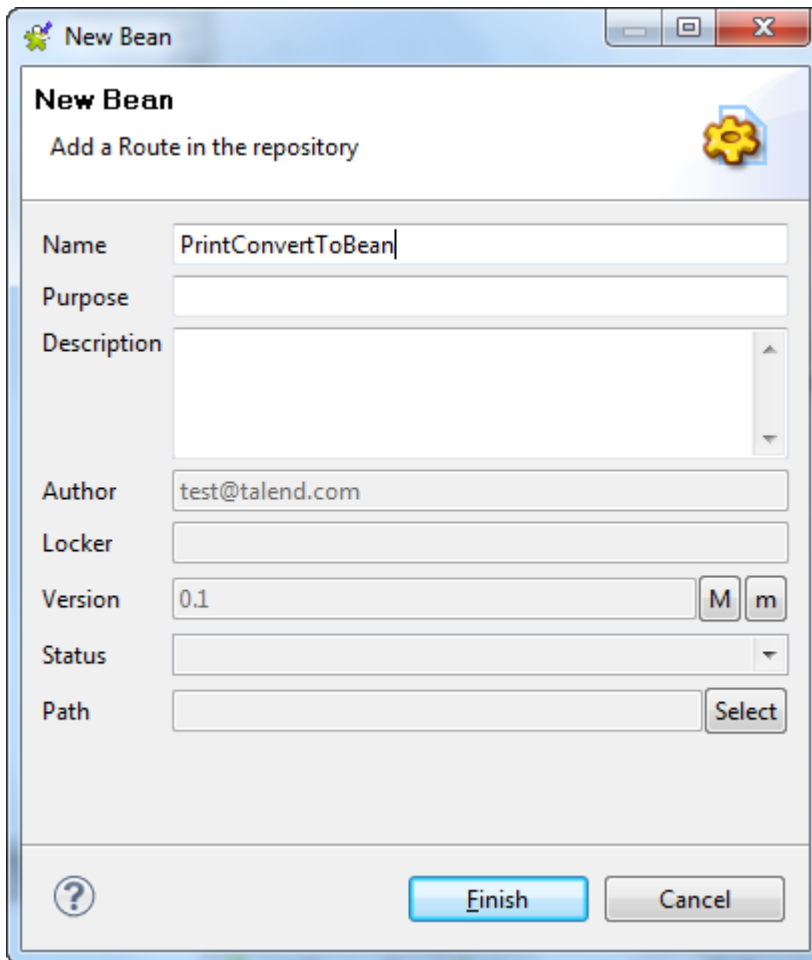

- Enter the following code in the design workspace.

```
package beans;

import org.w3c.dom.Document;
import org.w3c.dom.Element;
import org.w3c.dom.NodeList;
public class PrintConvertToBean {

    /**
     * print input message
     * @param message
     */
    public static void helloExample(Document message) {
```

```


if (message == null) {
    System.out.println("There's no message here!");
    return;
}
Element rootElement = message.getDocumentElement();
if (rootElement == null) {
    System.out.println("There's no root element here!");
    return;
}
System.out.println("The root element name is:"
    + rootElement.getNodeName());
System.out.println("The book categories are:");
NodeList types = rootElement.getElementsByTagName("category");
for(int i = 0;i<types.getLength();i++){
    Element child = (Element) types.item(i);
    System.out.println(child.getFirstChild().getNodeValue());
}
}
}

```

4. Press **Ctrl+S** to save your bean.

For more information about creating and using Java Beans, see *Talend Open Studio for ESB User Guide*.


Dropping and linking the components

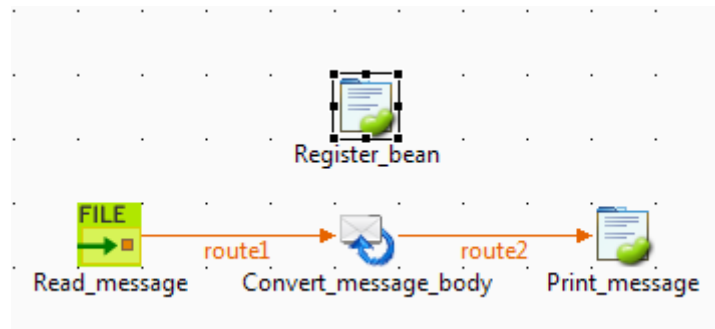

1. Drag and drop a **cFile**, a **cConvertBodyTo**, a **cBean** and a **cBeanRegister** from the **Palette** onto the workspace.
2. Link the **cFile**, **cConvertBodyTo** and **cBean** using the **Row > Route** connection as shown above.
3. Label the components to better identify their functionality.


Configuring the components

1. Double-click the **cFile** component to open its **Basic settings** view in the **Component** tab.

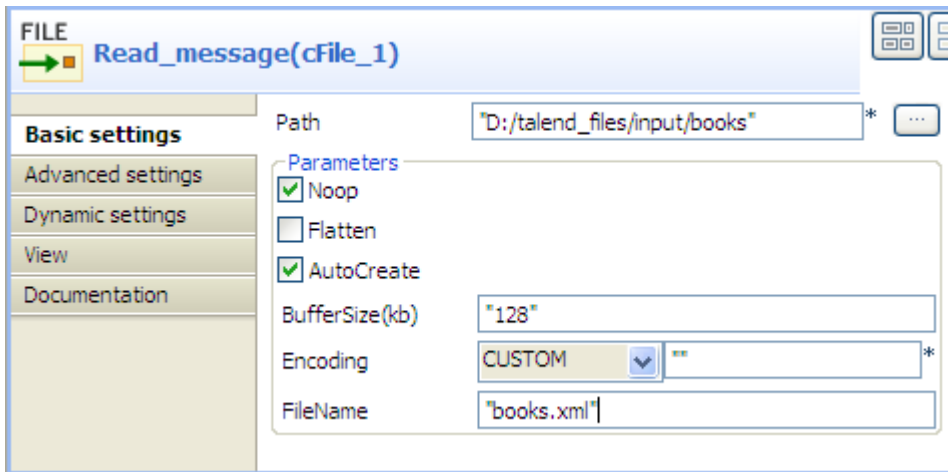


2. In the **Path** field, enter or browse to the path to the source XML file.
 If the source file folder contains more than one file, enter the name of the XML file of interest in the **FileName** field, and leave the other parameters as they are.


3. Double-click the **cConvertBodyTo** component to open its **Basic settings** view in the **Component** tab.

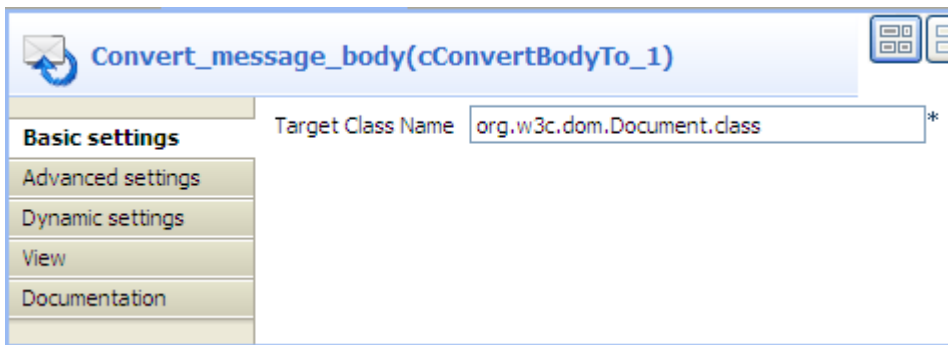

4. In the **Target Class Name** field, enter your target class name, *org.w3c.dom.Document.class* in this scenario.
5. Double-click the **cBeanRegister** component to open its **Basic settings** view in the **Component** tab.

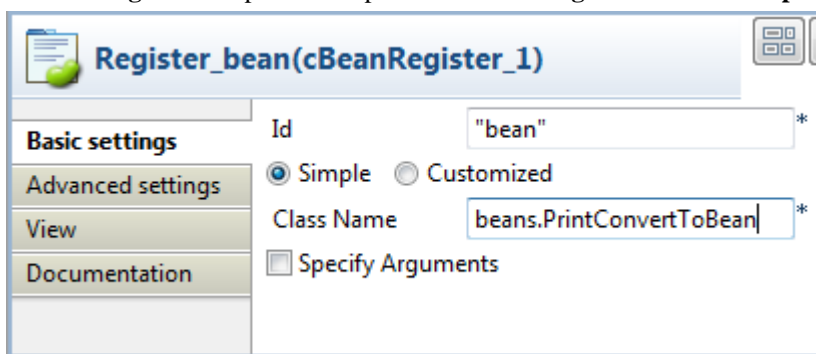

6. In the **Id** field, enter "bean".
 Select the **Simple** option and in the **Class Name** field, enter the name of the bean to be invoked, *beans.PrintConvertToBean* in this scenario.
7. Double-click the **cBean** component to open its **Basic settings** view in the **Component** tab.

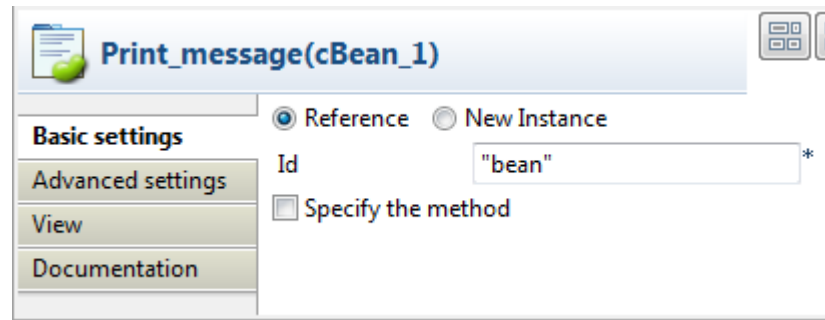

8. Select **Reference** and in the **Id** field, enter "bean" to call the bean that is registered by the **cBeanRegister**.
9. Press **Ctrl+S** to save your Route.

Viewing code and executing the Route


1. Click the **Code** tab at the bottom of the design workspace to check the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Read_message_cFile_1"))
                .routeId("Read_message_cFile_1")
                .convertBodyTo(org.w3c.dom.Document.class)
                .id("cConvertBodyTo_1").beanRef("bean")
                .id("cBean_1");
        }
    };
    getCamelContexts().get(0).addRoutes(routeBuilder);
}
```

As shown above, the message from the endpoint `Read_message_cFile_1` has its body converted to `org.w3c.dom.Document.class` by `cConvertBodyTo_1`, and then processed by bean invoked by `cBean_1`.

2. Press **F6** to execute the Route.

RESULT: The root element name and the contents of the **category** elements are displayed.

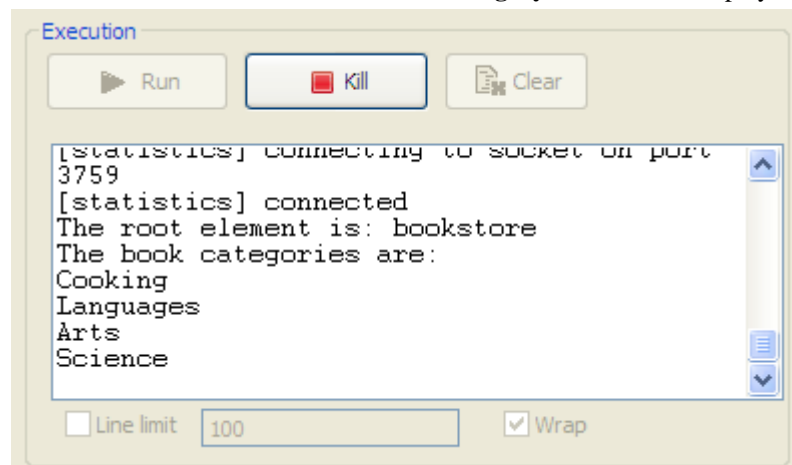

cSetBody



cSetBody properties

Component Family	Transformation	
Function	cSetBody replaces the payload of each message sent to it.	
Purpose	cSetBody is used to replace the content of each message sent to it according to expression value.	
Basic settings	<i>Language</i>	Select the language of the expression you use to set the content for matched messages, from Constant, EL, Groovy, Header, JavaScript, JoSQL, JXPath, MVEL, None, OGNL, PHP, Property, Python, Ruby, Simple, SpEL, SQL, XPath, and XQuery.
	<i>Expression</i>	Type in the expression to set the message content.
Usage	cSetBody is used as a middle component in a Route.	
Limitation	n/a	

Scenario: Replacing the content of messages with their extracts


In this scenario, file messages are routed from one endpoint to another, with the content of each message replaced with the information extracted from it.

The following is an example of the XML files used in this use case:

```
<people>
  <person>
    <firstName>Pierre</firstName>
    <lastName>Dubois</lastName>
    <city>Paris</city>
  </person>
</people>
```

Dropping and linking the components

This use case uses two **cFile** components, one as the message sender and the other as the receiver, a **cSetBody** component to replace the content of the messages on route, and a **cProcessor** component to display the new content of the messages routed to the receiving endpoint.

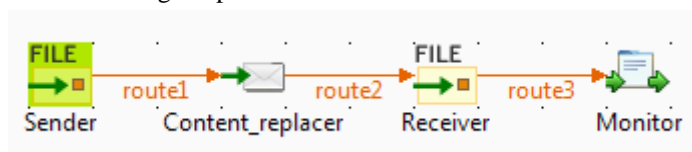


1. From the **Palette**, expand the **Messaging** folder, and drop two **cFile** components onto the design workspace.


2. From the **Transformation** folder, drop a **cSetBody** component onto the design workspace, between the two **cFile** components.
3. From the **Processor** folder, drop a **cProcessor** component onto the design workspace, following the second **cFile** component.
4. Right-click the first **cFile** select **Row > Route** from the contextual menu and click the **cSetBody** component.
5. Repeat this operation to connect the **cSetBody** component to the second **cFile** component, and the second **cFile** component to the **cProcessor** component.
6. Label the components to better identify their roles in the Route, as shown above.

Configuring the components and connections

1. Double-click the **cFile** component labeled *Sender* to display its **Basic settings** view in the **Component** tab.

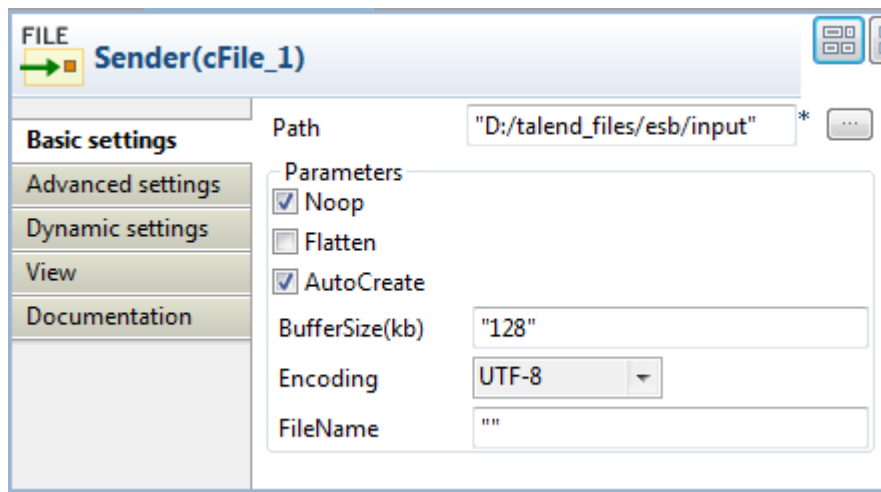

2. In the **Path** field, fill in or browse to the path to the folder that holds the source files.
3. From the **Encoding** list, select the encoding type of your source files. Leave the other parameters as they are.
4. Repeat these steps to define output file path and encoding type in the **Basic settings** view of the other **cFile** component, which is labeled *Receiver*.
5. Double-click the **cSetBody** component to display its **Basic settings** view in the **Component** tab.

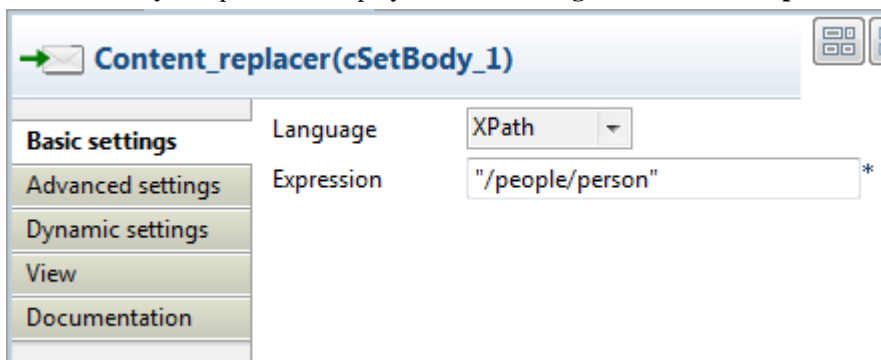

6. From the **Language** list box, select the language of the expression you are going to use.
Here we are handling XML files, so select **XPath** from the list box.
7. In the **Expression** field, type in the expression that will return the new message content you want.

In this use case, we want *person* to be the root element of each file when routed to the receiving endpoint, so type in `/people/person` in the **Expression** field.

- Double-click the **cProcessor** component to display its **Basic settings** view in the **Component** tab, and customize the code so that the console will display information the way you wish.

In this use case, we want to display the file name and content of each message routed to the receiving endpoint, so we customize the code as follows:

```
System.out.println("File received: " +
exchange.getIn().getHeader("CamelFileName") +
"\nContent:\n " +
exchange.getIn().getBody(String.class));
```

- Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

- Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.

```
public void initRoute() throws Exception {
    routeBuilder = new org.apache.camel.builder.RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Sender")).routeId("Sender").setBody()
                .xpath("/people/person").id("cSetBody_1").to(
                    uriMap.get("Receiver").id("cFile_2")
                );
        }
    };
}
```

In this partially shown code, a message route is built from one endpoint `.to` another, and while in routing, the content of each message is replaced according to the condition `.xpath("/people/person")` by `"cSetBody_1"`.

- Click the **Run** view to display it and click the **Run** button to launch the execution of your Route. You can also press **F6** to execute it.

```
Execution
[statistics] connecting to socket on port 3953
[statistics] connected
File received: file1.xml
Content:
<person id="8">
  <firstName>Ellen</firstName>
  <lastName>Ripley</lastName>
  <city>Washington</city>
</person>
File received: file2.xml
Content:
<person id="9">
  <firstName>Pierre</firstName>
  <lastName>Dubois</lastName>
  <city>Paris</city>
</person>
```

RESULT: The XML files are sent to the receiver, where *person* has become the root element of each file.

cSetHeader



cSetHeader properties

Component Family	Transformation	
Function	cSetHeader sets headers on each message sent to it.	
Purpose	cSetHeader is used to set headers or customize the default headers, if any, on each message sent to it for subsequent message processing.	
Basic settings	<i>Headers</i>	Click [+] to add as many headers as required to the table.
	<i>Name</i>	Type in a name for the message header.
	<i>Language</i>	Select Bean if you want to call a predefined Java Bean to return the header value, or the language of the expression you use, from None , Constant , EL , Groovy , Header , JavaScript , JoSQL , JXPath , MVEL , OGNL , PHP , Property , Python , Ruby , Simple , SpEL , SQL , XPath , and XQuery .
	<i>Value</i>	Type in the expression to set the value of the message header, or the Bean class that will return a value for the message header, in the form of <i>beans.BEAN_NAME</i> .
Usage	cSetHeader is used as a middle component in a Route.	
Limitation	n/a	

Scenario: Splitting a message and renaming the sub-messages according to contained information

In this scenario, a file message containing people information is split into sub-messages. Each sub-messages is renamed according the city name it contains, and then routed to another endpoint.

The following is the example XML file used in this use case:

```
<people>
  <person>
    <firstName>Pierre</firstName>
    <lastName>Dubois</lastName>
    <city>Paris</city>
  </person>
  <person>
    <firstName>Nicolas</firstName>
    <lastName>Yang</lastName>
    <city>Beijing</city>
  </person>
  <person>
    <firstName>Ellen</firstName>
    <lastName>Ripley</lastName>
    <city>Washington</city>
  </person>
</people>
```

A predefined Java Bean, *setFileNames*, is called by the **cSetHeader** component used in this use case to define a file name for each message according to the city name it contains. For more information about creating and using Java Beans, see *Talend Open Studio for ESB User Guide*.

```

package beans;


import org.w3c.dom.Document;
import org.w3c.dom.Element;
import org.w3c.dom.NodeList;

public class setFileNames {
    public String getCityName(Document document) {
        NodeList cities = document.getDocumentElement().getElementsByTagName(
            "city");
        Element city = (Element) cities.item(0);
        String textContent = city.getTextContent();
        return textContent+".xml";
    }
}

```

Dropping and linking the components


This use case uses two **cFile** components, one as the message sender and the other as the receiver, a **cSplitter** component to split the source message into sub-messages, a **cSetHeader** component to rename each sub-message, and a **cProcessor** component to display the file name of each message routed to the receiver.

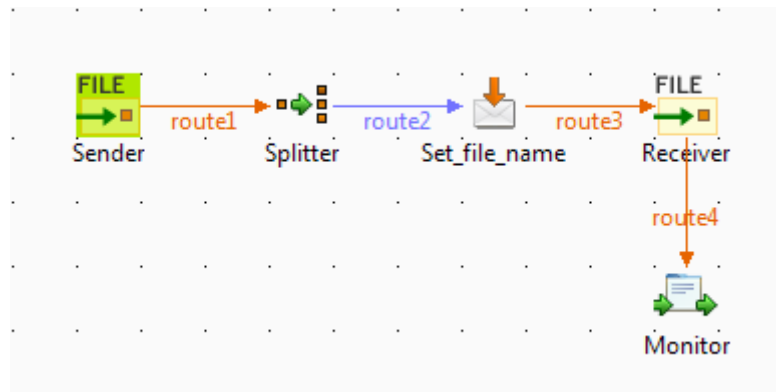

1. From the **Palette**, expand the **Messaging** folder, and drop two **cFile** components onto the design workspace.
2. From the **Routing** folder, drop a **cSplitter** component onto the design workspace, between the two **cFile** components.
3. From the **Transformation** folder, drop a **cSetHeader** component onto the design workspace, between the **cSplitter** component and the receiving **cFile** component.
4. Right-click the first **cFile** component, select **Row > Route** from the contextual menu and click the **cSplitter** component.
5. Right-click the **cSplitter** component, select **Row > Split** from the contextual menu and click the **cSetHeader** component.
6. Right-click the **cSetHeader** component, select **Row > Route** from the contextual menu and click the second **cFile** component.
7. Right-click the second **cFile** component, select **Row > Route** from the contextual menu and click the **cProcessor** component.
8. Label the components to better identify their roles in the Route, as shown above.

Configuring the components and connections

1. Double-click the **cFile** component labeled *Sender* to display its **Basic settings** view in the **Component** tab.

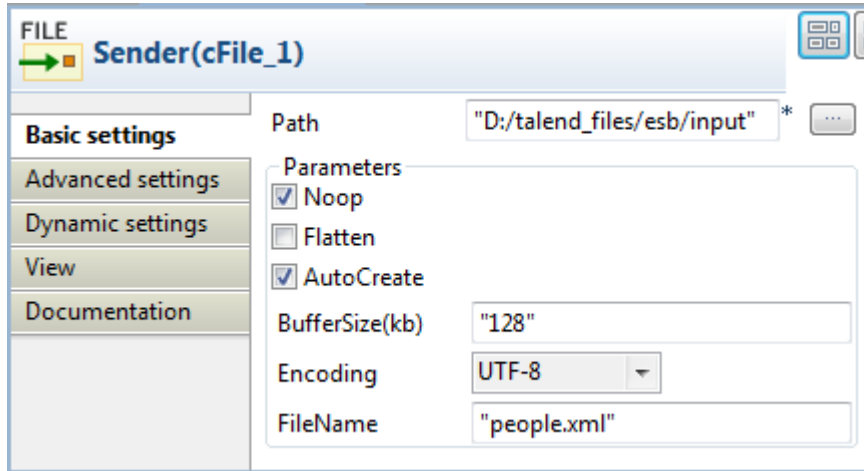


2. In the **Path** field, fill in or browse to the path to the folder that holds the source files.

From the **Encoding** list, select the encoding type of your source files.


In the **FileName** field, type in the file name of the source message. You can skip this step if the source folder contains only one file.

3. Repeat steps 1 and 2 above to define the output file path and encoding type in the **Basic settings** view of the other **cFile** component, which is labeled *Receiver*. Leave the **FileName** field blank.

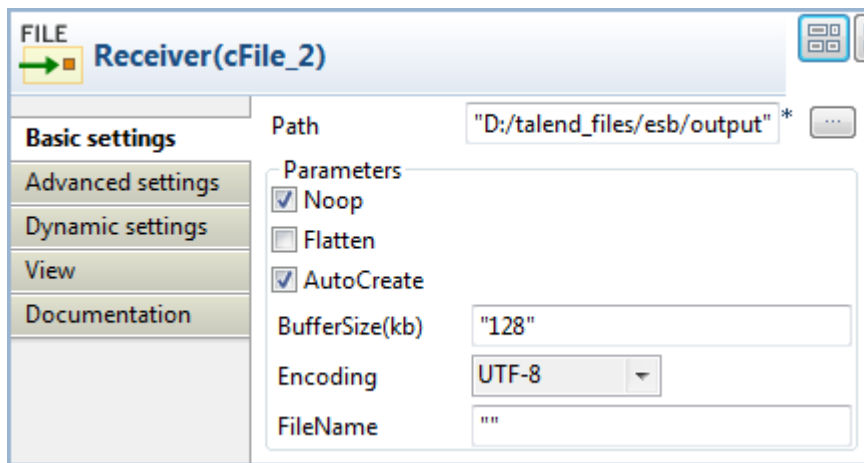


4. Double-click the **cSplitter** component to display its **Basic settings** view in the **Component** tab, and fill the **Expression** field with an expression according to which you want to split the source message.

In this use, as we want to split the message into sub-messages at each *person* node of the XML file, type in `xpath("/people/person")`.

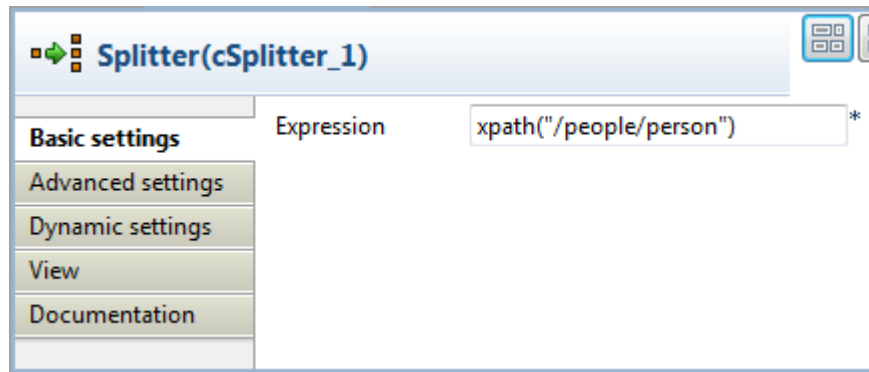

- Double-click the **cSetHeader** component, which is labeled *Set_file_name* to display its **Basic settings** view in the **Component** tab.

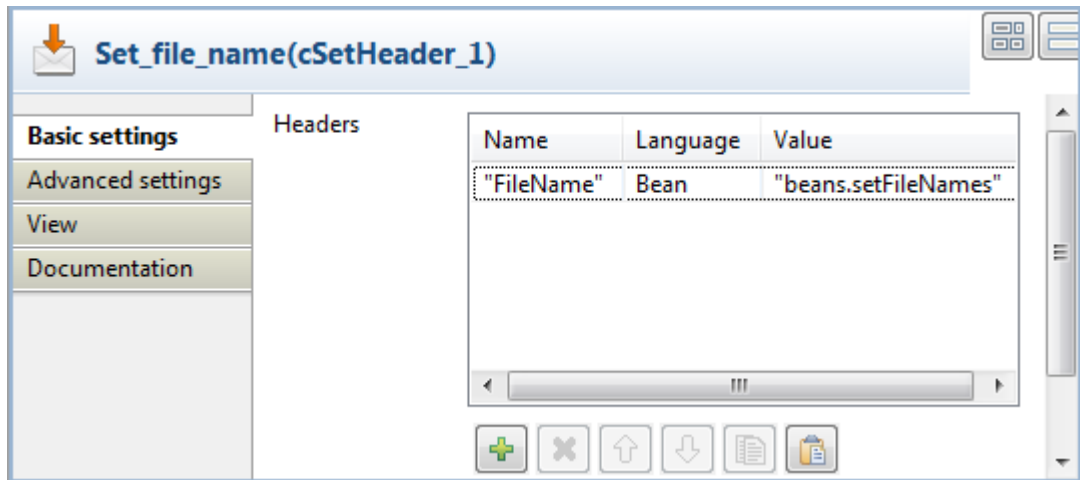

- Click **[+]** to add a row to the **Headers** table.

In the **Name** field, type in the name of the header you want to give to the messages.

Here, as we want to define the file name for each incoming message, fill in "FileName" as the header name.

Select **Bean** in the **Language** field and type in the name of the predefined Java Bean in the **Value** field, `beans.setFileNames` in this use case.

- Double-click the **cProcessor** component to display its **Basic settings** view in the **Component** tab, and customize the code so that the console will display information the way you wish.

In this use case, we want to display the file name each message routed to the receiving endpoint, so we customize the code as follows:

```
System.out.println("File received: "+
exchange.getIn().getHeader("FileName"));
```

- Press **Ctrl+S** to save your Route.

Viewing code and executing the Route

- Click the **Code** tab at the bottom of the design workspace to have a look at the generated code.


```

public RouteBuilder route() {
    return new RouteBuilder() {
        public void configure() throws Exception {
            from(uriMap.get("Sender_cFile_1")).routeId("Sender_cFile_1")
                .split(xpath("/people/person")).id("cSplitter_1")
                .setHeader("FileName").method("beans.setFileNames")
                .id("cSetHeader_1").to(uriMap.get("Receiver_cFile_2"))
                .id("cFile_2")
                .process(new org.apache.camel.Processor() {
                    public void process(
                        org.apache.camel.Exchange exchange)
                        throws Exception {
                        System.out.println("File received: "
                            + exchange.getIn()
                                .getHeader("FileName"));
                    }
                }).id("cProcessor_1");
        }
    };
}

```

As shown in the code, a message route is built from one endpoint `.to` another, and while in routing, the source message is split according to the condition `xpath("/people/person")` by `cSplitter_1`, and each sub-message is given a header named `FileName`, the value of which is returned by `.method(beans.setFileNames)`.

- Click the **Run** view to display it and click the **Run** button to launch the execution of your Route. You can also press **F6** to execute it.

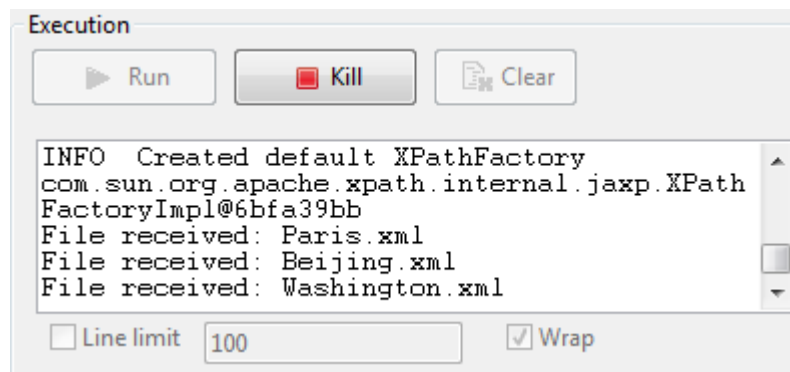

RESULT: The source file message is split into sub-messages and each sub-message is renamed after the city name it contains and routed to the receiving endpoint.

Related scenarios

For more scenarios, see:

[section Scenario: Using camel message headers as context parameters to call a job](#)

[section Scenario 1: Routing a message consecutively to a series of endpoints](#)

[section Scenario 2: Routing each message conditionally to a series of endpoints](#)